



FOR MORE THAN 75 YEARS...

Woods has committed to giving you an advantage in any field. Like you, we care about quality and making sure the job is done right. We care about the work you do, the land you cultivate, and we know you can't afford to stop. That's why we engineer our attachments to perform for you when it matters most, innovate exclusive systems designed to get you more out of each day, and rigorously test our products to excel under challenging conditions.

We recognize, when you choose Woods, you're putting your trust in our products and people to get you more out of every daylight hour. It's our privilege to prove to you year after year why Woods is the right attachment for your field.

Sincerely,

Derek Paulsen, Vice President & General Manager

Woods Equipment Company

Derek J. Paulsen

CONTENTS

15-foot Batwing® Cutters	3 6 8 10
BrushBull™ Single-spindle Cutters BrushFighter™ Single-spindle Cutters	13 16 20 22
FLAIL SHREDDERS	25
FLEX-WING FINISH MOWERS Turf Batwing® Mowers	29 32
•	35 38 40
Compact Super Seeders	43 46 48 50
HITCHES Woods Quick Hitch	52 I 52
•	53 1 56 1 59
BACKHOES Groundbreaker® Backhoes	61
Grading Scrapers Rear Blades Landscape Rakes Post Hole Diggers	67 1 70 1 72 1 74 1 76 1 77 1 78
Snow Blowers	79 82 84
LOADER ATTACHMENTS Pallet Forks Bale Spears	87 1 90 1 92
EZ-Change™ Blade System Cut Quality Study Quick-Hitch Ready Advantage Plant With Precision	2 12 28 34 42 60 93

GET MORE ONLINE

There are many features on our website that make it easy for you to find and compare products, get a quote, or connect with your Woods® dealer.







LIVE CHAT Chat live with an

advocate ready to

help you find the

right attachment. Ask

a question, request

TRACTOR

Use the Match My Tractor tool to find the 40HP and under Woods products that are compatible with your tractor.

a quote, or get connected with your nearest dealer.


FIND MY

Finding your nearest Woods dealer is easy! Simply enter your zip code and get a list of authorized Woods dealers in your area.



LATEST NEWS

Stay up-to-date with the latest news, marketing, and product information from Woods.



SUPERIOR STANDARDS. SUPERIOR SERVICE.



THE LEADER IN CUT QUALITY

You can count on Woods to consistently deliver superior cut quality. In fact, when put to the test, Woods finish mowers and Batwing® BW15 flex-wing cutters consistently outperformed competitors in key cut quality categories: evenness of cut, material distribution, and clipping dispersal.



THE MOST COMPREHENSIVE WARRANTY

We stand behind and reinforce our commitment to quality by offering the Woods Cut Above $^{\text{TM}}$ Warranty Program - the most comprehensive warranty plan in the industry.



AMERICAN-MADE WITH U.S. AND GLOBAL MATERIALS

We're proud to manufacture our Woods attachments in Oregon, Illinois.



ON-SITE CUSTOMER SUPPORT

When you need technical assistance with a product, our service teams in Oregon, Illinois are ready for you.



WOODS TRUCK FLEET

Our in-house truck fleet delivers your Woods attachment with "white-glove service" to Woods dealerships, so equipment arrives in perfect condition.



MATCH MY TRACTOR

Matching the right Woods implement to your tractor is easy the Woods Match My Tractor feature.



FLEX-WING ROTARY CUTTERS



THE ONE AND ONLY SINCE 1963



TOP 3 ADVANTAGES

1 | LEGENDARY CUT QUALITY

Enabled by deep cutting decks, high-lift blades, and unique undermount baffling design to better spread cut material.

2 | EASY MAINTENANCE

Woods EZ-Change™ Blade System is just one of several features that allow for easy maintenance. Change cutter blades in five steps with a ¾" wrench. No impact gun or torch required.

3 UNMATCHED GEARBOX PROTECTION

Expertly engineered gearbox prevents leaks, reduces downtime, and is backed by a **10-year** warranty including parts, labor, and seals.





MATCH MY APPLICATION

12-F00T

Rated #1 in cut quality by rotary cutter owners. Ideal for seasonal mowing under 100 acres with a utility tractor.



15-F00T

Rated #1 in cut quality by rotary cutter owners. Ideal for commercial mowing applications and year-round mowing of 100+ acres.



20-F00T

Ideal for mowing multiple large fields each 100+ acres year-round.

Note: Single-wing available for 15-Foot and 20-Foot BW models.





12-F00T

#1 IN CUT QUALITY*

Enabled by deep cutting decks, high-lift blades and our exclusive baffling design.

*Rated #1 in cut quality by rotary cutter owners and operators in a double-blind study of major brands in the category.

EASY MAINTENANCE

EZ-Change™ Blade System allows blade change in five steps with a 3/4" wrench. No impact gun or torch required. A large blade access window at the top of the deck let's you easily access blades for simple maintenance. Features our new shimless and greaseable design.



UNMATCHED GEARBOX PROTECTION

10-year gearbox warranty including parts, labor, and seals. Woods Exclusive Triple Seal™ Gearbox Protection and Cool-Flow™ Lubrication System to cool the gearbox, prevent leaks, and reduce downtime.

EASY CONNECTION

The Woods Exclusive
SmartLift™ System holds
your 80lb PTO driveline
allowing you to easily connect
and disconnect from the
tractor.





*Double-blind online study of the major brands in the flex-wing category.

PRODUCT TIER KEY

STANDARD

STANDARD PLUS

EXTRA HEAVY-DUTY

NEW MODEL

BW12.40

	<u> </u>
Product Tier	Professional
Tractor PTO 540 rpm (HP)	40-120
Adjustable Cutting Height (in)	2 - 12
Cut Capacity Diameter (in)	2.5
Cutting Width (ft)	12
Blade Tip Speed (fpm)	15,523 center / 15,459 wing
Blade Size (in)	.5 x 4
Weight / Tongue Weight (lbs)	3050 / 1055
Transport Width (in)	101
Hydraulics Wing Flex (degrees)	90 up, 22 down
Side Skirt (in)	11 deep, 7 ga thick
Stump Jumper Type	Oval
Deck Thickness (in)	10 ga
Wheel Type	21 inch laminated, 21 inch Severe-duty ag, 21 inch Severe-duty ag foam-filled, 25.5 inch Severe-duty ag, 25.5 inch Severe-duty ag foam-filled
Suspension	Spring on center section
Driveline Rating	CAT 4 CV main, CAT 4 wing
Gearbox Rating (HP)	160 splitter / 100 center and wing
Output Shaft Size (in)	2 dia
Structure Warranty	2-year
Options	Dual-wheels on center deck

ADDITIONAL FEATURES



- **(3)** Adjustable Hose Holder holds hoses closer to the hydraulic remotes, clear of PTO shaft and tractor tires. Makes it easier to match hose length to the tractor.
- (4) Metal Thumbscrew Dipstick quickly and easily check gearbox oil.
- Tapered Roller Bearing Design inside the gearbox better absorbs and deflects hard impacts away from gearbox components.
- PTO Lock Collar holds PTO collar back for easier tractor connection.
- Aligned Grease Points easily find and service grease points.
- Skid Shoes are replaceable.



SCAN THIS C

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.



15-F00T

#1-RATED CUT QUALITY*

Enabled by deep cutting decks, high-lift blades, and new features like:

- Woods® Level Lock™ Technology ensures a more level cut height across rugged terrain. (patent pending)
- **2** Optional Cut Height Indicator allows the operator to mark a desired cut height prior to mowing and readjust from the cab as needed for a more even cut.
- *Rated #1 in cut quality by rotary cutter owners and operators in a double-blind study of major brands in the category.

UNMATCHED GEARBOX PROTECTION

10-year gearbox warranty including parts, labor, and seals. Woods Exclusive Triple Seal™ Gearbox Protection and Cool-Flow™ Lubrication System to cool the gearbox, prevent leaks, and reduce downtime.

TRIPLE SEAL

COOL, FLOW.

EASY MAINTENANCE

Woods EZ-Change™ Blade System is just one of several features that allow for easy maintenance. Change cutter blades in five steps with a ¾″ wrench. No impact gun or torch required. Features our new shimless and greaseable design.



EASY CONNECTION

The Woods Exclusive
SmartLift™ System holds
your 80lb PTO driveline
allowing you to easily
connect and disconnect from
the tractor.



Note: Single-wing models BW10.52 and BW10.72 also available.

PRODUCT TIER KEY

STANDARD

STANDARD PLUS

	BW15.52	BW15.72		
Product Tier	Professional	Extra Heavy-Duty		
Tractor PTO (HP)	45 - 200	65 - 300		
Tractor PTO (rpm)	540 o	1,000		
Adjustable Cutting Height (in)	2-	-15		
Cut Capacity Diameter (in)	3	4.5		
Cutting Width (ft)	15, 10.5 on single-wing model	15, 10.5 on single-wing model		
Cut Area Shielding	Single or D	ouble Chain		
Blade Tip Speed (fpm)	15,526 (wing), 15,904 (center) at 540 rpm 15,708 (wing), 15,422 (center) at 1,000 rpm	15,526 (wing), 16,286 (center) at 540 rpm 15,708 (wing), 16,132 (center) at 1,000 rpm		
Blade Size (in)	.5	x 4		
Weight / Tongue Weight (lbs)	4595 / 1431	5635 / 1894		
Transport Width (in)	g	96		
Hydraulics Wing Flex (degrees)	90 up, 1	22 down		
Side Skirt (in)	.25 thick	x 13 deep		
Stump Jumper Type	Oval	Round		
Deck Thickness (in)	0.135	0.180		
Wheel Type		Ag, 25 in. severe-duty Ag foam-filled, n-filled, 29 in. used aircraft		
Driveline Rating	CAT 6 CV main; CAT 4 wing	CAT 6 CV main; CAT 5 wing		
Gearbox Rating (HP)	210 splitter / 200 center and wing	275 splitter / 225 center and wing		
Output Shaft Size (in)	2 dia	3 dia		
Lights	Rubber-mo	Rubber-mounted LED		
Options	Double row chain shielding, Dual wheels on Center and Wings, Towing Eye	Double row chain shielding, Dual wheels on Wings, Towing Eye, Walking Tandems, Shredding Kit, Deck Rings		
Structure Warranty	2-y	2-year		

ADDITIONAL FEATURES

- Large Blade Access Window for easy blade maintenance from the top of the deck.
- Adjustable Hose Holder holds hoses closer to the hydraulic remotes, clear of PTO shaft and tractor tires. Makes it easier to match hose length to the tractor.
- Thumbscrew Dipstick quickly and easily check gearbox oil.
- PTO Lock Collar holds PTO collar back for easier tractor connection.
- Magnetic Driveline Shields lift to service gearbox.
- Aligned Grease Points easily find and service grease points.



SCAN THIS CODE

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.





20-FOOT

LEGENDARY CUT QUALITY

Enabled by deep cutting decks, high-lift blades, and unique undermount baffling design to better spread cut material.

EASY MAINTENANCE

Woods EZ-Change™ Blade System is just one of several features that allow for easy maintenance. Change cutter blades in five steps with a ¾" wrench. No impact gun or torch required.



UNMATCHED GEARBOX PROTECTION

10-year gearbox warranty including parts, labor, and seals. Woods Exclusive Triple Seal $^{\text{TM}}$ Gearbox Protection and Cool-Flow $^{\text{TM}}$ Lubrication System to cool the gearbox, prevent leaks, and reduce downtime.



Note: Single-wing BW13.71 model is available.

	PRODUCT TIER KEY					
	· ·	STANDARD	STANDARD PLUS	PROFESSIONAL	HEAVY-DUTY	EXTRA HEAVY-DUTY
	BW20	1.51	BW2	0.61	BW	20.71
Product Tier	Professio	nal	Heavy-I	Duty	Extra He	avy-Duty
Tractor PTO (HP)	70 - 20	0			70 - 30	00
Tractor PTO (rpm)			540 or 1	,000		
Adjustable Cutting Height (in)			2 - 1	5		
Cut Capacity Diameter (in)	2		3		4	4
Cutting Width (ft)		20)			single-wing odel
Cut Area Shielding			Single or Dou	ıble Chain		
Blade Tip Speed (fpm)		15,450 at 540 rpm or 16,300 at 1,000 rpm				
Blade Size (in)		.5 x 4				
Weight / Tongue Weight (lbs)	6435 / 24	00	6600 / 2	2400	7740 /	/ 2700
Transport Width (in)			123	1		
Hydraulics Wing Flex (degrees)		90 up, 22 down				
Side Skirt (in)		.25 thick, 1	3.25 deep		.25 thick,	12.5 deep
Stump Jumper Type			Standard rour	nd-welded		
Deck Thickness (in)		0.13	35		2 x	.135
Wheel Type			. severe-duty Ag e-duty Ag foam-			ı-filled,
Driveline Rating	CA	T 6 CV main	/ CAT 4 wing			nain / CAT 5 ring
Gearbox Rating (HP)	250 splitte 120 center a		250 spli 205 center a			olitter / r and wing
Output Shaft Size (in)	2 dia			3 (dia	
Lights		Rubber-mounted LED				
Options	Double-row cha shielding, Tande arm suspension, ring hitch, Dual on Wing	m spring Pintel	Double-row ch shielding, Tand arm suspensio ring hitch, Shr Dual wheels o	dem spring on, Pintel edding Kit,	arm suspens ring hitch, D	ndem spring sion, Pintel
Structure Warranty			2-yea	ər		

DONNIET TIED VEV

ADDITIONAL FEATURES



- Large Blade Access Window for easy blade maintenance from the top of the deck.
- PTO Lock Collar holds PTO collar back for easier tractor connection.
- Thumbscrew Dipstick quickly and easily check gearbox oil.
- Aligned Grease Points easily find and service grease points.
- Smooth Sloped Deck sheds water and debris.



SCAN THIS CO

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.







EASILY REPLACE BLADES IN THE FIELD



LARGE ACCESS WINDOW

Reach blades and pins easily through a convenient large access window.*



ONE WRENCH

Change cutter and mower blades using only a 3/4" wrench.



REMOVE BLADES FAST

Remove blades fast with greaseable EZ-ChangeTM blade pins.

THERE'S NO COMPARISON TO THE WOODS" EZ-CHANGE" BLADE SYSTEM.

AVAILABLE ON ALL BATWING® CUTTERS AND SELECT WOODS® ROTARY CUTTERS.

*Prevents going under unit for simple blade maintenance. Feature available exclusively on professional Dual-Spindle models, BrushBull™, and Batwing® cutters.

NEW MODELS

RIGID ROTARY GUTTERS





TOP 3 ADVANTAGES

1 | EASY CONNECTION

Get in the field faster. Woods rigid rotary cutters combine several unique connection features for fast, easy, and hassle-free tractor hook-up.

2 | EASY MAINTENANCE

Woods EZ-Change™ Blade System is just one of several features that allow for easy maintenance. Change cutter blades in five steps with a ¾" wrench. No impact gun or torch required.

3 | UNMATCHED GEARBOX PROTECTION

Expertly engineered gearbox prevents leaks, reduces downtime, and reduces downtime. BrushBull™ and Dual-Spindle models feature a 10-year gearbox warranty including parts, labor, and seals.





MATCH MY APPLICATION

BRUSHBULL

Regular mowing of thick brush, small saplings, and tall grass. Great for roadsides and trails. Available in standard plus, professional, and heavy-duty models.



DUAL-SPINDLE

Two spindles for twice the cutting action. Perfect for managing orchards, vineyards, tree-lined fields, and brush. Available in standard plus and professional models.



BRUSHFIGHTER

Intermittent mowing of weedy overgrowth, light brush and grassy fields. Our standard model rotary cutter pairs with compact and sub-compact tractors.





EASY CONNECTION

The industry's easiest tractor connection enabled by:

- Quick-Hitch Ready from the factory. No additional hardware is needed to use your quick hitch.
- QUICK-HITCH READY

- **Adjustable Driveline Holder** holds the driveline as you prepare to connect or disconnect the cutter.
- **Tapered Front** gives you more room between the tractor tire and cutter when connecting and disconnecting to the tractor.

UNMATCHED GEARBOX PROTECTION

10-year gearbox warranty including parts, labor, and seals. Woods Exclusive Triple Seal™ Gearbox Protection and Cool-Flow™ Lubrication System to cool the gearbox, prevent leaks, and reduce downtime.

EASY MAINTENANCE

Woods EZ-Change™ Blade System is just one of several features that allow for easy maintenance. Change cutter blades in five steps with a ¾" wrench. No impact gun or torch required.



GREATER DURABILITY

Woods Exclusive Z-shaped, highstrength steel bumper is twice as thick as competitive models for backing over tough brush.



PRODUCT TIER KEY

STANDARD

STANDARD PLUS

4 & 5-F00T



	BB48.30	BB60.30	BB60.50	BB60.60
Product Tier	Standa	rd Plus	Professional	Heavy-Duty
Tractor PTO 540 rpm (HP)	15-50	25-50	30-150	40-150
Hitch	CAT 1	clevis	CAT 1 / CA	AT 2 clevis
Adjustable Cutting Height (in)	1-	.9	2-	12
Cut Capacity Diameter (in)	2	2	3	4
Cutting Width (in)	48		60	
Blade Tip Speed (fpm)	13,000	14,335	15,525	13,570
Blade Size (in)		.50	x 4	
Blade Carrier	Oval sturn	np jumper	Diamond stump jumper optional round	
Deck Thickness (in)	0.1	05	0.1	35
Side Frame Depth / Thickness (in)	10.5 /	0.135	12.7 / 0.25	
Frame / Deck Support (in)		3x3	Tube	
Weight w/ Chain Shielding (lbs)	635	728	974	1,045
Output Shaft Diameter (in)	1.57	1.57 dia		3 dia
Gearbox HP	6	65		210
Slip-Clutch Driveline Protection	CAT 3		CAT 4	CAT 5
Structure Warranty		2-у	rear ear	

ADDITIONAL FEATURES FOR ALL BRUSHBULL MODELS



- (5) Large Blade Access Window for quick and easy blade maintenance from the top of the deck.
- **(6)** Deep Cutting Deck works together with high-lift blades and a unique rear baffling design for better cut quality.
- (7) **Skid Shoes** protect the deck and are easy to change. Adjust the height on heavy-duty models.

Additional features continued on next page.



SCAN THIS C

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.

S-FOOT



	BB72.30	BB72.40	BB72.50	BB72.60	
Product Tier	Standard Plus	Profes	sional	Heavy-Duty	
Tractor PTO 540 rpm (HP)	30-65	40-90	50-150	50-210	
Hitch	CAT 1 clevis		CAT 1 / CAT 2 clevis		
Adjustable Cutting Height (in)		2-	12		
Cut Capacity Diameter (in)	2	2.5	3	4	
Cutting Width (in)		7	2		
Blade Tip Speed (fpm)	14,963	15,268	15,900	13,945	
Blade Size (in)		.50	x 4		
Blade Carrier	Oval sturn	np jumper	Diamond stump jun	nper optional round	
Deck Thickness (in)		0.1	35		
Side Frame Depth / Thickness (in)	10.5 /	0.135	12.7 /	0.25	
Frame / Deck Support (in)		3 x 3	tube		
Weight w/ Chain Shielding (lbs)	882	955	1,125	1,210	
Output Shaft Diameter (in)	1.57 dia	2 (dia	3 dia	
Gearbox HP	60	90	150	210	
Slip-Clutch Driveline Protection	CAT 3	CA	Т 4	CAT 5	
Structure Warranty		2-year			



SCAN THIS CODE

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.

ADDITIONAL FEATURES FOR ALL BRUSHBULL™ MODELS (CONTINUED)

- **B** A Heavy-Duty Crossbar and ¼" steel stump jumper to protect the undercarriage in extreme conditions.
- **A Full Frame Design** with full-length, 3 x 3" tubes and channels for greater strength and durability.
- Stress Points Tied To The 3 X 3" Tubes (Not The Deck Plate) for added stability.
- Rear Baffle, Standard On All Models, concentrates the airflow and ensures cut material is distributed evenly.
- Large 1/2-Inch By 4-Inch Blades And Extra Deep Deck precisely cut large amounts of material.

PRODUCT TIER KEY

STANDARD

STANDARD PLUS

EXTRA HEAVY-DUTY

7-F00T



	BB84.40	BB84.50	BB84.60	
Product Tier	Profes	ssional	Heavy-Duty	
Tractor PTO 540 rpm (HP)	40-90	50-150	50-210	
Hitch	CAT 1 / CAT 2 clevis	CAT 2 / C	AT 3 clevis	
Adjustable Cutting Height (in)		2-12		
Cut Capacity Diameter (in)	2	3	4	
Cutting Width (in)		84		
Blade Tip Speed (fpm)	15,086	16,000	14,250	
Blade Size (in)		.50 x 4		
Blade Carrier	Oval stump jumper	Diamond stump jumper	Diamond stump jumper optional round	
Deck Thickness (in)		0.135		
Side Frame Depth / Thickness (in)	11.4 / 0.135	12.7 ,	0.25	
Frame / Deck Support (in)		3 x 3 tube		
Weight w/ Chain Shielding (lbs)	1,132	1,336	1440	
Output Shaft (in)	2 dia 3 dia			
Gearbox HP	90	150	210	
Slip-Clutch Driveline Protection	CAT 4 CAT 5			
Structure Warranty		2-year		


SCAN THIS CODE

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.

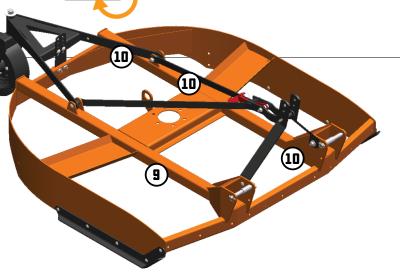





BRUSHFIGHTER

EASY CONNECTION

1 Engineered Quick-Hitch Ready from the factory. No additional hardware is needed to use your quick hitch.



EASY MAINTENANCE

2 Smooth sloped deck design sheds water and debris. Metal thumbscrew dipstick featured on standard-plus models makes oil checks fast and easy.

UNMATCHED GEARBOX PROTECTION



Standard Plus models feature a **10-year gearbox warranty** including parts, labor, and seals. Woods Exclusive Triple Seal™ Gearbox Protection and Cool- Flow™ Lubrication System prevents leaks, cools the gearbox, and reduces downtime.







Standard models come with a **6-year gearbox warranty**.



PRODUCT TIER KEY

STANDARD

STANDARD PLUS


PROFESSIONAL

HEAVY-DUTY

EXTRA HEAVY-DUTY

	BF4.20	BF5.20	BF6.20	BF4.30	BF5.30
Product Tier		Standard		Standa	rd Plus
Tractor PTO 540 rpm (HP)	15-40	20-	-50	15-50	20-50
Hitch			CAT 1 cantilevered		
Adjustable Cutting Height (in)			2-9		
Cut Capacity Diameter (in)		1 1.5			
Cutting Width (in)	48	57	69	48	57
Blade Tip Speed (fpm)	13,100	13,620	14,340	13,100	13,600
Blade Size (in)		.5 x 3			
Blade Carrier			Oval stump jumper		
Side Frame Depth (in)		7			
Approximate Weight (lbs)	489	548	627	510	569
Gearbox HP	50			6	5
Driveline Protection	Shear	r-bolt or slip-clutch (CAT 3	Slip-cluto	ch CAT 3





- Oval Stump Jumper adds durability and creates more airflow under the deck for better distribution of cut material.
- **Slip-Clutch** is standard on standard-plus models for greater driveline protection.
- **B** Factory Pre-Filled Gearboxes for added convenience. Gets you in the field faster.
- (7) High Strength Steel for dependability and durability.



See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.



OUAL-SPINDLE

EASY CONNECTION

1 Engineered Quick-Hitch Ready from the factory. No additional hardware is required to use your quick hitch, so you can get in the field and get to work.



EASY MAINTENANCE

Woods EZ-Change™ Blade System is just one of several features that allow for easy maintenance. Change cutter blades in five steps with a ¾" wrench. No impact gun or torch required.



UNMATCHED GEARBOX PROTECTION

Advanced gearboxes feature a **10-year gearbox warranty** including parts, labor, and seals. Woods Exclusive Triple Seal™ Gearbox Protection and Cool-Flow™ Lubrication System to cool the gearbox, are year locks, and reduce dewritime.



PRODUCT TIER KEY

STANDARD

STANDARD PLUS

PROFESSIONAL

8-F00T

DUAL-SPINDLE

	DS8.30 (PULL-TYPE) MDS8.30 (3-POINT MOUNTED)	DS8.50 (PULL-TYPE) MDS8.50 (3-POINT MOUNTED)	DSD8.50* (OFFSET) (SEMI-MOUNT)
Product Tier	Standard-Plus	Profes	ssional
Tractor PTO (Minimum HP)	35 pull-type 45 mounted	40 pull-type 55 mounted	40
Tractor PTO Speed (rpm)	540	540 or	1,000
Hitch	pull-type: pivoting clevis mounted: CAT 1 or 2 / clevis	pull-type: pivoting clevis mounted: CAT 2 or CAT 3 / clevis	CAT 2 or CAT 3 / clevis
Hydraulic Variable Offset (in)	N.	/A	21 Right - 5 Left
Cutting Width (in)	96		
Cutting Capacity Diameter (in)	1.5	:	3
Adjustable Cutting Height (in)		2-12	
Blade Tip Speed (fpm)	15,200	14,886 at 540 rpm 15,126 at 1,000 rpm (MDS only)	14,886 at 540 rpm, 15,126 at 1,000 rpm
Blade Size (in)		.5 x 4	
Deck Side Depth Thickness (in)	10 deep, .135 thick	13 deep,	.135 thick
Weight (lbs)	pull-type: 1,440 mounted: 1,215	pull-type: 2,205 mounted: 2,055	2,335
Wheel Selection	Laminated, severe-duty new a	g; foam filled new ag, 15" rims	21" laminated
Gearbox Rating	100 center / 75 spindles 205 center / 160 spindles		160 spindles
Optional Dual-Wheels	N/A	Yes, pull-type only	N/A
Driveline w/Slip Clutch	pull-type: CAT 4 CV mounted: CAT 4	pull-type: CAT 6 CV mounted: CAT 5	CAT 5
Structure Warranty		2-year	

ADDITIONAL FEATURES FOR ALL DUAL-SPINDLE MODELS

- (2) PTO Lock Collar (Pull-Type Only) holds lock collar in a pulled-back position for easier tractor connection.
- Large Blade Access Window for quick and easy blade maintenance from the top of the deck.
- Smooth Sloped Deck easily sheds water and debris.
- CV Drive (Pull-Type Only) for less maintenance and smoother operation



SCAN THIS CO

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.



PRODUCT TIER KEY

STANDARD

STANDARD PLUS

PROFESSIONAL

HEAVY-DUTY

10-FOOT

DUAL-SPINDLE

	DS10.40 (PULL-TYPE) MDS10.40 (3-POINT MOUNTED)	OS10.50 (PULL-TYPE) MOS10.50 (3-POINT MOUNTED)	DS010.50*	
Product Tier		Professional		
Tractor PTO (Minimum HP)	40 pull-type 60 mounted	50 pull-type 65 mounted	50 semi-mounted	
Tractor PTO Speed (rpm)	540	540 or	1,000	
Hitch		ivoting clevis or CAT 3 / clevis	CAT 2 or CAT 3 / clevis	
Hydraulic Variable Offset (in)	N	/A	27 Right - 5 Left	
Cutting Width (in)		120		
Cutting Capacity Diameter (in)	2 3		3	
Adjustable Cutting Height (in)		2-12		
Blade Tip Speed (fpm)	16,700	15,974 at 540 rpm or 16,232 at 1,000 rpm (MDS only)	15,974 at 540 rpm or 16,232 at 1,000 rpm	
Blade Size (in)		.5 x 4		
Deck Side Depth Thickness (in)	10 deep .135 thick	13 deep	.135 thick	
Weight (lbs)	pull-type: 1,820 mounted: 1,575	pull-type: 2,400 mounted: 2,255	2,510	
Wheel Selection	Laminated, severe-duty new ag; foam filled new ag, 15" rims	Laminated, severe-duty new ag; foam filled new ag, 15" rims, used aircraft, foam filled used aircraft	21" laminated	
Gearbox Rating	120 center / 90 spindles	205 splitter /	160 spindles	
Optional Dual-Wheels	N/A	Yes, pull-type only	N/A	
Driveline w/Slip Clutch	pull-type: CAT 4 CV mounted: CAT 5	pull-type: CAT 6 CV mounted: CAT 5	CAT 5	
Structure Warranty	2-year			

*HYDRAULIC VARIABLE OFFSET

Offset models are ideal for orchards, tree-lined fields, and any setting with overhangs.



SCAN THIS To see the offset feature in action.





See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.

FLAIL SHREDDERS



///// TOP SHREDDING PERFORMANCE

FLAIL SHREDDERS

INDUSTRY'S LARGEST FLAIL TUBE



12.75" diameter flail tube for increased rigidity resulting in smoother operation.

4X SHREDDING ACTION



Tri-lateral hood design and spiralmounted knives deliver four times the cutting action, slicing crop residue into smaller pieces for faster decomposition.

EASY CONNECTION

(1) Engineered Quick-Hitch Ready from the factory. No additional hardware is required to use your quick hitch, so you can get in the field and get to work.



GEARBOX DESIGN

Special oil seal protectors prevent vines from damaging the gearbox. A high-capacity gearbox with a large oil volume keeps bearings cool and extends gearbox life.



PRODUCT TIER KEY					
	STANDARD	STANDARD PLUS	PROFESSIONAL	HEAVY-DUTY	EXTRA HEAVY-DUTY

	S20CD	S25CD	S27CD		
Product Tier		Heavy-Duty			
Minimum Tractor PTO (HP)	120	150	162		
Driveline 2 Point & 3 Point		CAT 6			
Adjustable Cutting Height (in)		2 - 14			
Cutting Width (in)	247	247 303 327			
Overall Width (in)	254	310	334		
Weight (lbs)	5038	5838	6138		
Number of L Knives	228	284	308		
Lift HP Required	120	150	165		
Flail Tube Diameter (in)		12.75			
Flail Tube End Bearing (in)		2.18			
Shielding		Steel flaps			
Knife Retention		Bolt-on (no D-rings)			
Knife Pattern		Spiral			
Knife Types	Double-edged L (6mm), double-edged HD-cotton Duraface® (8mm) L				
Wheel Size (in)		9.5L x 15.6			
Wheel Arm Types	Rigid strut				
Gearbox Rating HP	300				
Optional Friction Clutch	24,000 lbs inch rating				
Automatic Clutch	30,00	00 lbs inch rating (1.75" 20 PTO	only)		

ADDITIONAL FEATURES

KNIFE STYLE OPTIONS

STANDARD L KNIFE

Heat-treated, 6mm reversible for long life

HD-COTTON L KNIFE

Heat-treated, Duraface®, 8mm reversible for longer life and durability in severe conditions



SCAN THIS C

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor.





WOODS® FINISH MOWERS RATED #1 IN OVERALL GUT QUALITY

- ✓ EVENNESS OF CUT
- MATERIAL DISTRIBUTION
- ✓ CLIPPING DISPERSAL





WHEREVER YOU SEE THE SEAL, YOU KNOW YOU'RE GETTING BEST-IN-CLASS CUT QUALITY AND #1-RATED CUTTING TECHNOLOGY.

TURF \| BATWING

FLEX-WING FINISH MOWERS



///////////////////////////////// EVEN BETTER CUT QUALITY



TOP 3 ADVANTAGES

1 | #1-RATED CUTTING TECHNOLOGY

Every Turf Batwing® features the best-inclass cutting technology of the TurfKeeper® Series verified by independent testing.



2 | FASTER FINISH RESULTS

High blade tip speeds and a hightorque belt design let you mow faster while maintaining superior cut quality.

3 | UNMATCHED SPINDLE AND GEARBOX PROTECTION

Professional models offer an industryleading **3-year spindle warranty** and **10-year gearbox warranty** including parts, labor, and seals.





MATCH MY APPLICATION



TURF BATWING® STANDARD

Ideal for the large residential property owner with an eye for cut quality. This 12-foot model is compatible with compact tractors.

TURF BATWING® **PROFESSIONAL**

Ideal for large property owners, commercial land managers, and landscapers who need to deliver a superior, finish-cut quality all year-round. Available in 12, 15, and 17-foot. Compatible with compact tractors.



TURF \ BATWING

#1-RATED CUTTING TECHNOLOGY


Every Turf Batwing® features the best-in-class cutting technology of the TurfKeeper® Series verified by independent testing.

FASTER FINISH RESULTS

High blade tip speeds and a high-torque belt design let you mow faster while maintaining superior cut quality.

UNMATCHED SPINDLE AND GEARBOX PROTECTION

Professional models feature a **10-year gearbox and 3-year spindle** warranty including parts, labor, and seals. Woods Exclusive Triple SealTM Gearbox Protection and Cool-FlowTM Lubrication System to cool the gearbox, prevent leaks, and reduce downtime.

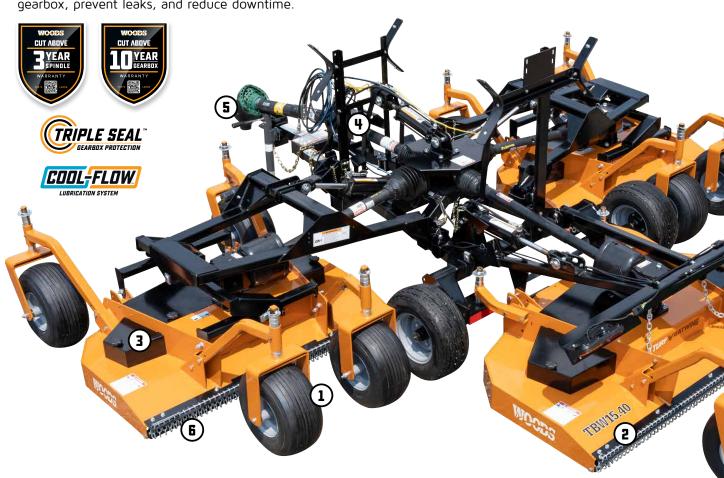

Note: Unit shown with optional chain shielding.

PRODUCT TIER KEY

STANDARD

STANDARD PLUS

	TBW12.20	TBW12.40	TBW15.40	TBW17.40
Product Tier	Standard	Professional		
Tractor PTO 540 rpm (HP)	25-60	30-80	35-80	40-80
Cut Width (in)	144	144	180	204
Cut Height (in)	1.5 - 5.0	1.5 - 5.5		
Deck Cut Widths (in)	Wing Deck 48 /	Center Deck 60 Wing Deck 60 / Wing Deck 72 / Center Deck 72 Center Deck 72		
Deck Overlap (in)	6			
Blade Tip Speed (fpm)	17,900 / 18,200	18,000	18,100	
Blade Spindle Bearings	Double ball bearings	Triple ball bearings		
Overall Wt. / Transport Tongue Wt. (lbs)	2005 / 384	2819 / 688	3454 / 754	3569 / 794
Transport H x L x W (in)	71.5 x 135 x 91	74 x 167 x 88	83.6 x 176 x 97	90.7 x 176 x 101
Transport Tires (in)	(2) 20.5 x 8-10			
Caster Wheels (in)	(10) 8 x 3.5 solid	(10) 15 x 6-6 pneumatic	(10) 18 x 9.5-8 pneumatic	
Gearbox Rating (HP)	100 splitter / 30 deck	100 splitter / 60 deck	100 splitter / 75 deck	
Drive Type	Gearbox over v-belt			
Drivelines	Main CAT 3 (CV) / Wing CAT 3	Main CAT 4 (CV) / Wing CAT 3		
Deck Thickness (in)	0.141	0.188		
Hydraulic Remotes Required	1			
Warranty Spindle / Gearbox	1-year / 6-year	3-year / 10-year		
Structure Warranty	1-year	2-year		

ADDITIONAL FEATURES

- Large Caster Wheels enable a smooth finish cut across rugged terrain.
- Wide Discharge Area for better clipping dispersal.
- Easy Shield Removal no tools needed to access belt sheaves, belt, and spring-loaded idler.
- Hydraulic Cylinders fold the mower for easy transport and storage.
- PTO Lock Collar holds PTO collar back for easier tractor connection on professional models.
- Optional Chain Shielding for added safety and peace of mind.




SCAN THIS CO

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.





THE QUICK-HITCH READY ADVANTAGE

Many of our Woods attachments are engineered Quick-Hitch Ready from the factory. Our unique A-frame design features built-in bushings. No additional hardware is needed to use your quick hitch.

Woods offers CAT 1 and CAT 2 hitches. See page 52



WHEN YOU SEE THIS SYMBOL, YOU KNOW THE WOODS ATTACHMENT IS QUICK-HITCH READY!

HITCH UP AND GET TO WORK!

LIST OF WOODS® QUICK-HITCH READY PRODUCTS

- TurfKeeper® Series Finish Mowers
- Rigid Rotary Cutters
- Flail Shredders
- Tillers
- Seeders
- Box Scrapers
- Grading Scrapers
- Snow Blowers

3-POINT FINISH MOWERS



//////////////////// BEST-IN-CLASS FINISH CUT



TOP 3 ADVANTAGES

1 | BEST-IN-CLASS CUT QUALITY

When put to the test, Woods TurfKeeper® Series consistently outperformed competitive rear-mount finish mowers in every cut quality category: evenness of cut, material distribution, and clipping dispersal.



2 | EASY CONNECTION

A unique combination of features add up to fast, easy, and hassle-free tractor hook-up.

UNMATCHED SPINDLE AND GEARBOX PROTECTION

Professional models offer an industry-leading **3-year spindle warranty** and **10-year gearbox warranty** including parts, labor, and seals.





MATCH MY APPLICATION




TURFKEEPER® SERIES

Ideal for commercial and residential finish mowing and groundskeeping applications (large lawns, sports fields, parks, and more). Standard models available in 5 and 6 foot cutting widths and professional models available in 5, 6, and 7-foot cutting widths.

RD990X

The perfect tool for the professional landscaper, land manager, or groundskeeper. This rough cut and finish mower combination is tough and versatile. Move from rough, weedy farmland to commercial lawns and landscapes with a finish-cut quality.



TURFKEEPER SERIES

BEST-IN-CLASS CUT QUALITY

When put to the test, Woods TurfKeeper® Series consistently outperformed competitive rear-mount finish mowers in every cut quality category: evenness of cut, material distribution, and clipping dispersal.




EASY CONNECTION

A unique combination of features add up to fast, easy, and hassle-free tractor hook-up.

1 Engineered Quick-Hitch Ready from the factory. No additional hardware is required to use your quick hitch, so you can get in the field and get to work.







PRODUCT TIER KEY STANDARD STANDARD PLUS

	TK60.20	TK72.20	TKP60.40	TKP72.40	TKP84.40
Product Tier	Stan	dard		Professional	
Tractor PTO 540 rpm (HP)	15-35	20-35	15-50	20-50	25-50
Hitch	Limited CAT 1 / CAT 1	CAT 1	Limited CAT 1 / CAT 1	CA	Т 1
Cutting Width (in)	60	72	60	72	84
Adjustable Cutting Height (in)		1.5 - 5			
Chain Shielding		Optional			
Overall Width (in)	61	73	61	73	85
Operation Weight, w/Chains (lbs)	481	538	636	709	817
Deck Thickness (in)	0.1	41	0.188		
Blade Tip Speed (fpm)	17,900	18,000	18,000	18,100	
Blade Overlap (in)	1.2	25		1.5	
Blade Spindles/Bearings	Cast iron lubed-		Ductile iron housings / triple ball bearings, greasable		
Belt and Belt Adjustment	B-section Aramid /	Spring-loaded idler	B-section Aramid / Spring-loaded w/Bearing Pivol		//Bearing Pivot
Driveline Category	CAT 3				
Gearbox Rating (HP)	3	5	60		
Caster Wheels	3.5 x 8.0 s	olid rubber	4 x 10 solid rubber		
Structure Warranty	1-у	ear		2-year	

ADDITIONAL FEATURES

- (2)Driveline Holder holds the driveline as you prepare to connect and disconnect from the tractor.
- Heavy-Duty Caster Wheels and Replaceable Pivot Bushings for added performance and durability on professional models.
- Easy Shield Removal no tools needed to access belt sheaves, belt, and spring-loaded idler.



See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.



ROSSOX

OUR MOST VERSATILE FINISH MOWER

Move from rough, weedy farmland to commercial lawns and landscapes with a finish-cut quality.

EASY MAINTENANCE

Woods EZ-Change™ Blade System is just one of several features that allow for easy maintenance. Change cutter blades in five steps with a ¾" wrench. No impact gun or torch required.





PRODUCT TIER KEY

STANDARD

STANDARD PLUS

RD990X

Product Tier	Heavy-Duty
Tractor PTO (HP)	45-75
Hitch	CAT 1 / CAT 2
Cutting Width (in)	90
Weight (lbs)	1,200
Adjustable Cutting Height (in)	1.5-7
Overall Width (in)	97
Deck Material Thickness (in)	.188
Side Skirt (in)	.31 x 8.5 with skid shoes
Gearbox Rating (HP)	75
Blade Tip Speed (fpm)	17,000
Blade Overlap (in)	2
Blade Spindles/Bearings	3 cast iron housings / greasable tapered roller bearings
Tractor PTO Speed (rpm)	540
Driveline Size	CAT 4
Belt	Powerband w/double B-section
Belt Adjustment	Spring-loaded idler
Structure Warranty	2-year

ADDITIONAL FEATURES



- CAT 1 / CAT 2 Hitch fits a wider range of tractors.
- Free Swinging Blades for finish mowing and rough cutting.
- Standard Stump Jumper protects spindles from rocks, stumps, and other obstructions.
- Replaceable Skid Shoes for durability and long life.
- (5) Tapered Roller Bearings provide superior performance in rough conditions.



See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.



SEED CALIBRATION SYSTEM

There is no comparison to our Seed Calibration System. Dial in your exact seed rate per acre with a simple formula and any small digital scale. Save time, save money, and save seed.

SEEDER INTERCHANGEABLE TOOLS*

Tailor your seeder to the job at hand. Select a spiked roller ideal for lawn and pasture seeding. Switch to a disc blade for more aggressive soil preparation.

*Available on PSS and CSS models.

SEED PLANTING AT TWO DEPTHS

This patented design allows for planting multiple seed types at different depths in a single pass. Save time and plant more effectively.

WHAT CAN A WOODS SEEDER PLANT?

HERE'S A PARTIAL LIST.

COOL SEASON GRASS / CEREAL GRAINS BOX

(large seeds)

Annual Ryegrass Barley Buckwheat Buffalo Grass

LEGUME BOX

(small seeds)

Alfalfa Bahai Bermuda Birdsfoot Trefoil

NATIVE WARM SEASON GRASS BOX

(fluffy, light-weight seeds)

Big Bluestem Brome Canadian Wild Rye Indian Grass



SCAN FOR A COMPLETE SEED LIST

SEEDERS



//// PLANT WITH PRECISION



TOP 3 ADVANTAGES

1 | SAVE SEED

Get an exact seed rate before planting with Woods Exclusive Seed Calibration System. No wasted seed. No guesswork.

2 | SAVE TIME

Woods Exclusive system for one-pass planting allows you to prep your seed bed, plant your seed at different depths, and culti-pack for optimal seed to soil contact.

3 | PLANT WITH PRECISION

Choose between cool season, native warm season, or legume seed boxes. Select the right tillage tool for your project, and plant up to three types of seed at different depths simultaneously.





MATCH MY APPLICATION

PRECISION SUPER SEEDER™

Ideal for pasture seeding, overseeding, native grass planting and food plot planting.



COMPACT SUPER SEEDER

Compatible with an ATV, UTV, or compact tractor. Delivers the same value and features as the Precision Super Seeder™.



FOOD PLOT SEEDER

Ideal for the avid hunter planting multiple food plots and small acreage farmer seeding legumes and larger seeds.



PRECISION SUPER SEEDER"


OUR MOST VERSATILE SEEDER! PLANT COOL SEASON, NATIVE WARM SEASON, AND LEGUMES.

SAVE SEED

Get an exact seed rate before planting with Woods Exclusive Seed Calibration System. No wasted seed. No guesswork.

SAVE TIME

Woods Exclusive system for one-pass planting allows you to prep your seed bed, plant your seed at different depths, and culti-pack for optimal seed to soil contact.

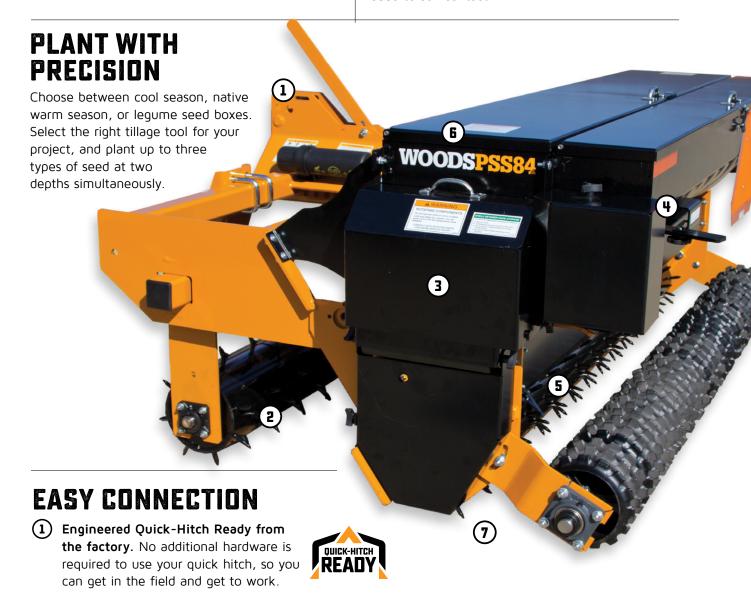

Note: Model shown does not include optional native warm-season seed box.

PRODUCT TIER KEY					
	STANDARD	STANDARD PLUS	PROFESSIONAL	HEAVY-DUTY	EXTRA HEAVY-DUTY

	PSS60	PSS72	PSS84	
Product Tier		Professional		
Tractor Engine (HP)	30-65	35-85	40-125	
Tractor Hitch	CAT 1 8	& CAT 2	CAT 2	
Working Width (in)	60	72	84	
Weight — Standard Configuration 1 (lbs)	861	1,132	1,249	
Weight — Hunting Edition Configuration 2 (lbs)	1,222	1,565	1,761	
Drive Type	Ground			
Number of Seed Boxes Available	3			
Seed Metering		Fluted and picker wheel		
Seed Cups (7" spacing)	8	10	12	
Cool Season Seed Box Capacity (bushel)	5	6	7	
Native Warm Season Seed Box Capacity (bushel)	6.25	7.5	8.75	
Legume Seed Box Capacity (bushel)	1.25	1.5	1.75	
Front Roller Spikes	(160) .5" x 1.75" carbide steel	(192) .5" x 1.75" carbide steel	(224) .5" x 1.75" carbide steel	

ADDITIONAL FEATURES

- (2)Woods Exclusive Interchangeable Front Tillage tool to match your planting application. Choose spiked roller or disc harrow.
- Optional Row Planting Kit gives you flexibility to plant in rows or broadcast.
- Adjustable Seed Rate to meet specification for your seed type.
- Adjustable Planting Depth to plant seeds at an ideal depth in a single pass.
- Three Different Seed Cup Types ensure precise application rate with almost any seed size.
- Optional Mud Scrapers prevents mud build-up on the spike drive roller, disks, or cultipacker.



See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.

COMPACT SUPER SEEDER

PAIRS WITH COMPACT AND SUB-COMPACT TRACTORS. ATV/UTV* COMPATIBLE.

SAVE SEED

Get an exact seed rate before planting with Woods Exclusive Seed Calibration System. No wasted seed. No guesswork.

SAVE TIME

Woods Exclusive system for one-pass planting allows you to prep your seed bed, plant your seed at different depths, and culti-pack for optimal seed to soil contact.

PLANT WITH PRECISION

Choose between cool season or legume seed boxes. Select the right tillage tool for your project, and plant up to two types of seed at two depths simultaneously.

ATV/UTV COMPATIBLE

* Optional tow kit allows you to plant with your ATV or UTV.



Note: Model shown does not include optional legume seed box.

can get in the field and get to work.

PRODUCT TIER KEY STANDARD STANDARD PLUS

	CSS <mark>48</mark>	CSS60			
Product Tier	Profes	ssional			
Tractor Engine (HP)	15-35	20-45			
Tractor Hitch	CAT 1 / Lir	nited CAT 1			
ATV/UTV Engine Size (cc)	Minimum 350	Minimum 400			
Working Width (in)	48	60			
Overall Width	57	69			
Weight with Seed, Depending upon Configuration (lbs)	395-679	487-810			
Drive Type	Ground-driven spiked roller				
Number of Seed Boxes Available	2				
Seed Metering	6 seed cups	8 seed cups			
Seed Box Ratio	5.1:1 or 14.4:1	5.1:1 or 14.4:1			
Cool Season Seed Box with Agitator	Star	dard			
Cool Season Seed Box Capacity (bushel)	1	1.25			
Legume Seed Box	Opti	ional			
Legume Seed Box Capacity (bushel)	1	1.25			
Front Tool Choices	6 - 16" notched disc blade or spiked roller	8 - 16" notched disc blade or spiked roller			
Calibration Tray	Standard				
Crank Handle	Standard				
Spring-loaded Trailing Cultipacker	Optional				
Speed Ranges	Turf seed range 0-700 lbs/acre (cool seasc	on); food plot range 0-30 lbs/acre (legume)			
Options		hings, mud scrapers, seed stop plates, ghts, tow kit			

ADDITIONAL FEATURES

- Woods Exclusive Interchangeable Front Tillage tool to match your planting application. Choose spiked roller or disc harrow.
- Adjustable Seed Rate to meet specification for your seed type.
- Adjustable Planting Depth to plant seeds at an ideal depth in a single pass.
- Up to Two Different Seed Cup Types ensure precise application rate with almost any seed size.
- (6) Optional Mud Scrapers prevents mud build-up on the spike drive roller, disks, or cultipacker.




See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.



FOOD PLOT SEEDER

ENGINEERED WITH ADDITIONAL FEATURES FOR AVID HUNTERS.

SAVE SEED

Get an exact seed rate before planting with Woods Exclusive Seed Calibration System. No wasted seed. No guesswork.

SAVE TIME

Woods Exclusive system for one-pass planting allows you to prep your seed bed, plant your seed at different depths, and culti-pack for optimal seed to soil contact.

PLANT WITH PRECISION



PRODUCT TIER KEY

STANDARD

STANDARD PLUS

	FPS60	FPS72	FPS84		
Product Tier		Professional			
Tractor Engine (HP)	30-65	35-85	40-125		
Tractor Hitch	CAT 1/	CAT 2	CAT 2		
Working Width (in)	60	72	84		
Weight — Standard Configuration 1 (lbs)	899	1,196	1,320		
Weight — Fully Configured 2 (lbs)	1,222	1,578	1,762		
Number of Seed Boxes Available		3			
Seed Box Ratio		1-speed			
Seed Cups (7" spacing)	8	10	12		
Row Units		Standard			
Cool Season Seed Box Capacity (bushel)	5	6	7		
Legume Seed Box Capacity (bushel)	1.25	1.5	1.75		
Disc Blades	(8) 16" notched	notched			
Cast Iron or Nylon Trailing Cultipacker	Optional (9.5" diameter cast iron or 11" diameter nylon)				
Calibration Tray & Crank Handle	Standard				
Mud Scrapers & Frame Platform		Optional			



- Standard Row Planting Kit gives you flexibility to plant in rows or broadcast.
- Adjustable Seed Rate to meet specification for your seed type.
- Adjustable Planting Depth to plant seeds at an ideal depth in a single pass.
- Two Different Seed Cup Types ensure precise application rate with almost any seed size.
- Optional Mud Scrapers prevents mud build-up on the spike drive roller, disks, or cultipacker.



SCAN THIS

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS







Match the color of your attachment to your tractor. Some colors only available on select models.

WOODS HITCHES

QUICK HITCH

MINIMIZE DOWNTIME. MAXIMIZE PRODUCTIVITY.


Woods Quick Hitches make it easy to quickly change attachments in the field.

ADDITIONAL FEATURES

- (1) Heavy-duty steel construction with adjustable top link bracket
- 7/8" mounting pins and adapter bushings
- (3) Lower arms lock automatically



WHEN YOU SEE THIS SYMBOL, YOU KNOW THE WOODS ATTACHMENT IS QUICK-HITCH READY!

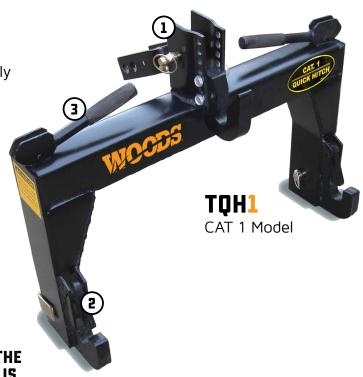

	TQH1	TQH2
Tractor Hitch	CAT 1	CAT 2
Width (in)	27.25	27.25
Approximate Weight (lbs)	79	170
Mounting Pin Diameter (in)	.875	.875
Adapter Bushing Diameter (in)	1.125	1.125



SCAN THIS CODE

See woodsequipment.com for all models and complete product specifications.

TILLAGE





TOP 3 ADVANTAGES

1 | TACKLE TOUGH CONDITIONS

A combination of exclusive systems and unique designs ensure your Woods tillage attachment delivers – even in challenging soil conditions.

2 | EASY CONNECTION

Tillers are Quick-Hitch Ready from the factory. No additional hardware is needed to use your quick hitch, so you can get to work.

3 | PREPARE OPTIMAL SEED BED

Every Woods tillage attachment is designed to optimize your planting project from food plots to landscaping.



MATCH MY APPLICATION

FORWARD & REVERSE ROTARY TILLERS



Forward-rotation tillers deliver a finely finished seedbed even in rocky soil conditions. Ideal for low-horsepower tractors.

Reverse-rotation tillers are great for working the soil more aggressively and leaving behind a finer finish in fewer passes.

DISC HARROWS

For more challenging, rough tillage soil preparations. Disc Harrow is the ideal choice when you need to dig deeper than a tiller and break ground faster.



FORWARD & REVERSE ROTARY TILLERS

TACKLE TOUGH CONDITIONS

Woods Exclusive tiller blade mounting feature keeps blades from coming loose in the field. Heat-treated, C-shaped tines penetrate deep, even in thick residue and loose, compacted or rocky soil.

EASY CONNECTION

1 Engineered Quick-Hitch Ready from the factory. No additional hardware is required to use your quick hitch, so you can get in the field and get to work.



UNMATCHED **GEARBOX** PROTECTION

Expertly engineered gearbox prevents leaks, reduces downtime, and is backed by a 6-year gearbox warranty including parts, labor, and seals.







PRODUCT TIER KEY STANDARD STANDARD PLUS

	RT48.30 RTR48.30	RT60.40 RTR60.40	RT72.40 RTR72.40		
Product Tier	Standard Plus	Profess	sional		
Tractor PTO HP	15 - 35	18 - 40	20 - 50		
Tractor Hitch	Limited CAT 1 / CAT 1	CAT	1		
Working Width (in)	47	59	71		
Overall Width (in)	57	69	81		
Weight (lbs)	502 / 508	570 / 578	621 / 630		
Maximum Tilling Depth (in)		7			
Drive Type	Gearbox				
Number of Tine/Number of Flanges	24 / 6	28 / 7	36 / 9		
Number of Tines per Flange		4 C-type			
Rotor Speed (rpm)		210			
Tractor PTO Speed (rpm)		540			
PTO Driveline Protection		Slip clutch			
Gearbox Housing	Heavy-duty cast iron				
Gearbox Drain Plug	Yes				
Quick-hitch Ready	Yes				
Parking Stand	Standard				







- Fixed Offset Tiller Width covers tire tracks with each pass.
- Adjustable Skid Shoes provide easy depth control.




SCAN THIS C

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor. Some colors only available on select models.




DIRTBREAKERT ROTARY TILLERS

PRODUCT TIER KEY

ADDITIONAL FEATURES

- **Robust Gear-Driven Side Drive** provides years of reliable service and requires far less maintenance than chain-driven units.
- **Tapered Tailgate** removes furrow for a finished seedbed.
- Heavy-Duty Cast Iron Gearbox Housing with 6-year gearbox warranty.
- Adjustable Skid Shoes provide easy depth control.
- **(5)** Parking Stand standard for easy storage.

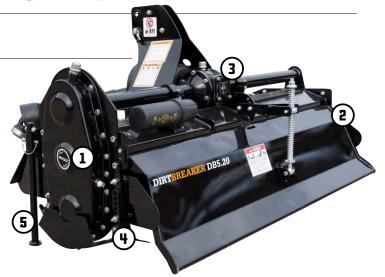

	STANDARD	STANDARD PLUS PROFESSIONAL	HEAVY-DUTY EXTRA HEAVY-DUTY		
NEW MODELS	DB4.20	DB5.20	DB6.20		
Product Tier		Standard			
Tractor PTO HP	15 - 25	20 - 30	25 - 35		
Tractor Hitch		CAT 1			
Working Width (in)	48	62.1	71.9		
Overall Width (in)	53.1	67.2	77		
Weight (Ibs)	570	640	705		
Maximum Tilling Depth (in)	6.9				
Drive Type		Gearbox			
Number of Tine/Number of Flanges	36 / 6	48 / 8	54 / 9		
Number of Tines per Flange		6 C-type			
Tine Rotation Direction	Forward				
Rotor Speed (rpm)	244				
Tractor PTO Speed (rpm)	540				
PTO Driveline Protection		Slip clutch			



SCAN THIS CODE

See woodsequipment.com for all models and complete product specifications.





DISC HARROWS

TACKLE TOUGH CONDITIONS

Optional mud scrapers prevent clogging for increased productivity in challenging conditions.

PREPARE OPTIMAL SEED BED

Our unique tapered frame design balances individual disc gangs and only requires removing a single pin for easy disc angle adjustments. Quickly change your disc angle for more or less aggressive tillage to match your ideal seed bed.



		STANDARD	STANDARD PLUS PR	OFESSIONAL HEAVY-D	UTY EXTRA HEAVY-DUTY
	DHS48	DHS64	DHS80	DHM80	DHM96
Product Tier			Professional		
Tractor Engine HP	up to 35	25 - 45	35 - 55	45 - 75	55 - 85
Tractor Hitch	Limited CAT 1, CAT 1, CAT 0 Optional	CA	Т 1	CAT 1 ,	/ CAT 2
Width (in)	48	64	80	80	96
"Average Weight (lbs) - depending on blade type"	390	508	590	845	960
Disc Blade Type	Notched	No	tched or combinatio	n smooth and notch	ned
Average Weight Distribution per Blade (lbs)	33	36	33	47	44
Disc Diameter (in) / Quantity	16 / 12	18 / 14	18 / 18	20 / 18	20 / 22
Disc Spacing (in)	7.5 front and rear		9 front	7.5 rear	
Gang Axle Size (in)		1 square		1 1/8	square
Frame Construction (in)	3 x 3 tube	and angle	3 x 3 tube and channel	3 x 3	tube




PRODUCT TIER KEY

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor.



UNMATCHED 2-YEAR TRACTOR WARRANTY

As part of our Cut Above Warranty Program $^{\text{\tiny M}}$, Woods $^{\text{\tiny 8}}$ is the only manufacturer to warranty a tractor for 2-years when a Groundbreaker $^{\text{\tiny 8}}$ backhoe is properly installed on a Woods sub-frame.





SCAN THIS CODE

FOR COMPLETE WARRANTY INFORMATION

or visit woodsequipment.com/warranty

WOODS

BACKHOES



GROUNDBREAKER® BACKHOES

TOP 3 ADVANTAGES

1 | GREATER VISIBILITY

Curved-boom design allows you to dig with greater visibility and control.

3 | FITS MANY TRACTORS

Subframe kits and three-point mounts available for many tractor models.

2 INDUSTRY-LEADING 2-YEAR TRACTOR PROTECTION

Peace of mind with an unmatched 2-year tractor warranty when a properly installed Woods subframe is purchased from Woods.





MATCH MY APPLICATION

HEAVY-DUTY

Up to 7.5-foot digging depth. Ideal for smaller dirt working and construction jobs, trenching for utilities, removing tree stumps, and landscaping jobs. Compatible with compact and subcompact tractors.

EXTRA HEAVY-DUTY

Up to 10-foot digging depth. Greater power and digging force than heavy-duty models. Ideal for larger construction and demolition projects, tearing up and moving concrete, landscaping, and trenching and drainage jobs.




GROUNDBREAKER®

GREATER VISIBILITY

Curved-boom design allows you to dig with greater visibility and control.

FITS MANY TRACTORS

Subframe kits and three-point mounts available for many tractor models.

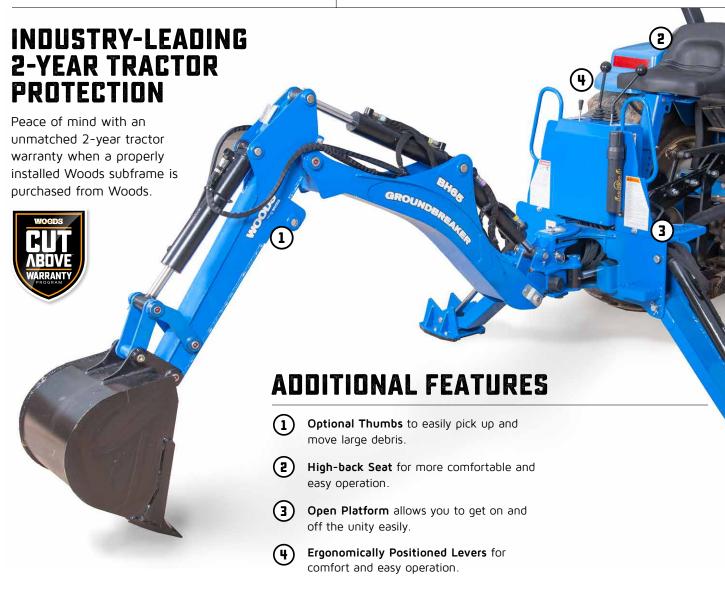

Note: Photo shown does not include optional mechanical or hydraulic thumb.

PRODUCT TIER KEY					
	STANDARD	STANDARD PLUS	PROFESSIONAL	HEAVY-DUTY	EXTRA HEAVY-DUTY

1		I I		l .
	BH65	BH75	BH85	BH100
Product Tier	Heavy	r-Duty	Extra Heavy-Duty	
Tractor PTO (HP)	15 - 30	20 - 40	30 - 100	40 - 100
Digging Depth - 2' Flat Bottom (in ft)	78 6.5	90 7.5	102 8.5	120 10
Digging Depth - 8' Flat Bottom (in)	52	70	82	102
Reach from Swing Pivot (in)	102	119	141	161
Loading Height Reach (in)	60 33.5	73 46	83 61	100 70
Transport Height Length (in)	66.5 42	74 45	94 55	104 55
Approx. Weight - frame only (lbs)	695	842	1,275	1,320
Swing Arc (degrees)	150	180		
Stabilizer Spread (in)		ensport) / (operating)		
Relief Pressure (psi)	2,030		2,465	
Bucket Digging Force (lbs)	2,800	3,380	4,6	500
Dipperstick Digging Force (lbs)	1,590	2,230	2,490	2,720
Bucket Rotation (degrees)		180	O°	
Trenching Bucket Widths (in)	9, 12, 16	9, 12, 16, 18, 24	12, 15,	18, 24
Thumb	Optional r	nechanical	Optional mecha	nical or hydraulic
Flip-Over Stabilizer Pads		Stan	dard	
Stabilizer Street Pads	Optional			
PTO Pump Kit	N/A		Optional	
Ditching Bucket	N.	/A	3	6
Cemetery / Bellhole Bucket	N.	/A	3	6
2-Cylinder Swing	N/A Yes			



SCAN THIS CODE

See woodsequipment.com for all models and complete product specifications.





Match the color of your attachment to your tractor. Some colors only available on select models.



GET THE EQUIPMENT YOU NEED NOW!



LANDSCAPE ATTACHMENTS



KEEP MOVING



TOP 3 ADVANTAGES

1 | EASY CONNECTION

Many of our landscape attachments are engineered **Quick-Hitch Ready** from the factory.

2 DURABILITY

Built tough with added durability where it matters most.

3 | VERSATILITY

Engineered to move from backyard projects to commercial landscaping work.



MATCH MY APPLICATION

BOX **SCRAPERS**

Move large amount of dirt and gravel quickly.

LANDSCAPE RAKES

Great for clean-up jobs and fine raking.

GRADING SCRAPERS

Ideal for leveling dirt and gravel in driveways, lawns, and fields.

POST-HOLE DIGGERS

Power through tough soil conditions and projects, like planting trees and shrubs or installing deck or fence posts.

REAR BLADES

Move dirt, grade driveways, and clear snow.

STUMP GRINDERS

Reduce tree stumps to mulch and grind below ground level.

BOX SCRAPERS

EASY CONNECTION

1 Engineered Quick-Hitch Ready from the factory. No additional hardware is required to use your quick hitch, so you can get in the field and get to work.



DURABILITY

Easily carve into sod and dirt with full-length, high-strength double beveled cutting edges.



PRODUCT TIER KEY					
	STANDARD	STANDARD PLUS	PROFESSIONAL	HEAVY-DUTY	EXTRA HEAVY-DUTY

	BSXX.20	BSXX.30	BSXX.40			
	48 60 72	60 72	72 84			
Product Tier	Standard	Standard plus	Professional			
Tractor HP	20-35	25-45	40-65			
Tractor Hitch	Limited CAT 1 / CAT 1	CAT 1	CAT 1 / CAT 2			
Working Width (in)	48 60 72	60 72	72 84			
Capacity (cubic ft)	7.3, 11.5, 13.9	15.6, 18.9	19.0, 22.3			
Approximate Weight (lbs)	240, 400, 450	510, 551	660, 750			
Scarifier Depth (in)	0, 1.5, 3	0, 1.5, 3	0, 1.5, 3			
Number of Scarifiers	4, 5, 6	5, 6	6, 7			
Tailgate Type	Fixe	Fixed Standard fl				
Cutting Edges		2				
Scarifier Mount	Slot in tube	Heavy-Duty saddle				

HOW TO CHOOSE THE RIGHT MODEL:

Simply choose the width and tier level to determine your model number.

Example: BS60.30







- Reinforced Steel A-Frame Design for easy attachment and durability.
- (3) High-strength Moldboards for tackling rugged jobs.
- Adjustable Scarifier Teeth with replaceable tips for durability and versatility.
- High-Carbon Reversible/Replaceable Cutting Edges for versatility and a level finish.
- 1/4" Plate Welded Inside End Plates to increase life on professional models.



GRADING SCRAPERS

EASY CONNECTION

1 Engineered Quick-Hitch Ready from the factory. No additional hardware is required to use your quick hitch, so you can get in the field and get to work.



DURABILITY

Heavy-duty saddle scarifier mounting, approachable leading edges and structural reinforcements keep Woods scrapers stronger for longer.

VERSATILITY



PRODUCT TIER KEY

STANDARD

STANDARD PLUS

PROFESSIONAL

	GSXX.30	GSXX.40		
	54 60 72	84 96		
Product Tier	Standard Plus	Professional		
Tractor HP	20-45	30-65		
Hitch	Limited CAT 1 / CAT 1	CAT 1 / CAT 2		
Working Width (in)	54 60 72	84 96		
Overall Length (in)	42, 46	46		
Box Height (in)	14, 16	16		
Number of Scarifiers	4, 5	6		
Weight (lbs)	430, 520, 600	430, 520, 600 750, 800		
Cutting Edges	(2) .	(2) .5 x 6		
Scarifier Depth	0, 1,	, 2.5		

HOW TO CHOOSE THE RIGHT MODEL:

Simply choose the width and tier level to determine your model number.

Example: GS60.30



Line

Product Working

Width



Product Tier



See woodsequipment.com for all models and complete product specifications.



ADDITIONAL FEATURES

- Heavy-duty Mast Plate creates more down force for a smoother surface - all but eliminating a "washboard" effect.
- Adjustable Scarifier Teeth with replaceable tips for durability and versatility.
- Tall Side Frames hold more material for leveling.
- Reversible/Replaceable High-Carbon Cutting Edges give you control to better match your application.
- Adjustable Skid Shoes allows operator to set the grade.

REAR BLADES

DURABILITY

① Double-Beveled, Reversible, and Hardened Cutting Edges for added durability and longevity.

VERSATILITY

Choose from models with manual or hydraulic angle, offset, and tilt adjustments to maneuver easily in the field.



EASY CONNECTION

Parking stand featured on Heavy-Duty and Extra Heavy-Duty units for added convenience. Holds the unit upright and level to allow for an easier connection.

PRI	IDUCT TIER KEY	STANDARD	STANDARD PLUS	PROFESSIONAL	HEAVY-DUTY	EXTRA HEAVY-DUTY
	RBSX		RBS		RBX	
Product Tier	54 60 Standard	7 72	Standard	72 84 plus		4 96 /-Duty
Tractor HP	Up to 30		20-4	5	30	-65
Tractor Hitch	Limited CAT 1 / C	CAT 1	CAT	1	CAT 1,	/ CAT 2
Working Width (in)	54 60 72	2	60 72	84	72 8	4 96
Moldboard Height (in)	12		15		1	7
Approximate Weight (lbs)	134, 142, 156	5	268, 288,	, 308	455, 4	75, 495
Angle Adjustments (degrees)	5	Positions	up to 30		7 Position	s up to 45
Adjustment Types	Manual angle	Ž	Manual angle,	offset, tilt	(Hydraulid	e, offset, tilt angle kit able)
Offset Adjustments (in)	N/A		Up to 12 left	or right	Up to 18 I	eft or right
Tilt Adjustments (degrees)	N/A		Up to	15	Up t	o 23
Cutting Edge	.38 x 6			.50	x 6	

HOW TO CHOOSE THE RIGHT MODEL:

Simply choose the width and tier level (if applicable) to determine your model

number. **Example: RB84.60**





ADDITIONAL FEATURES

- **(3)** Formed Moldboard Made From High-Strength Steel provides exceptional rigidity and pivots 360°.
- Optional End Plates and Skid Shoes are available for all models for added durability.

RB) 84 | 96

STS RBS72

RB850

RB1010

	Extra Heavy-Duty	
45-65	50-100	80-150
CAT 1 / CAT 2	CAT 2	CAT 2 / CAT 3
84 96	95	119
17.5	17	18
705, 730	1233	1535
Up to 45	Up to 60 forward, up to 30 reverse	Up to 60
Manual angle, offset, tilt or Manual offset, tilt with hydraulic angle or Hydraulic angle, offset, tilt	Manual angle, offset, tilt or Manual offset, tilt with hydraulic angle, or Hydraulic angle, offset, tilt	Manual offset, tilt with hydraulic angle or Hydraulic angle, offset, tilt
Up to 20 left or right	Up to 24 left or right	Up to 33 left or right
Up to 23	Up to 30	Up to 28
	.50 x 6	


SCAN THIS CODE

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor.



LANDSCAPE RAKES

EASY CONNECTION

Optional Parking Stand is available for added convenience. Holds the unit upright and level to allow for an easier connection.

DURABILITY


Large, structural tine beam channel holds alloy spring steel tines firmly.

VERSATILITY

Fine raking features allow for light-duty lawn care to general maintenance projects.

ADDITIONAL FEATURES

- **Pivot Components** for increased longevity.
- Optional Gauge Wheels for better depth control.

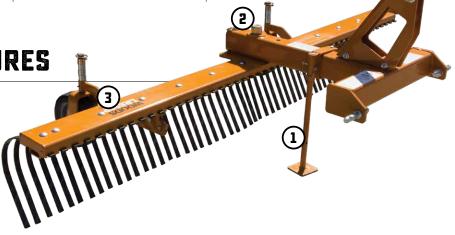

	PRODUCT '	TIER KEY						
		ST.	ANDARD	STANDARD	PLUS	PROFESSION	IAL HEAVY-D	UTY EXTRA HEAVY-DUT
	LRS52	LRS60	LR	572	LR	572P	LRS84	P LRS96P
Product Tier		Standard					Standard plu	us
Tractor HP		Up to 30			20-45			
Tractor Hitch	Lir	nited CAT 1 / CA	T 1		CAT 1			
Working Width (in)	52	60	7	2	-	72	84	96
Approximate Weight (lbs)	156	168	18	36	2	64	288	311
Angle Adjustments (degrees)	5 Positions up to 30 (forward & reverse)							
Tine Dimensions (in)	5/16 x 1							
Tine Spacing (in)	1							
Gauge Wheels				Optio	onal			



SCAN THIS CODE

See woodsequipment.com for all models and complete product specifications.

AVAILABLE COLORS



Match the color of your attachment to your tractor.

POSTHOLE DIGGERS

EASY CONNECTION

1 Parking Stand make for easy tractor connection.

DURABILITY

Rugged gearbox design engineered with tapered roller bearings to better withstand shock loads and backed by a 6-year gearbox warranty including parts, labor, and seals.



Select from a wide range of auger bits ensures the best tool for any application.



ADDITIONAL FEATURES

- Driveline Holder keeps driveline off the ground during storage.
- **Positioning Handle** is standard for easy operation.

PRODUCT TIER KEY					
1	STANDARD	STANDARD PLUS	PROFESSIONAL	HEAVY-DUTY	EXTRA HEAVY-DUTY
PD25.2	1	PD35.	31	PD9	5.51
Standard		Standard P	lus	Profes	sional
15 - 25		20 - 35		35 -	95
Limited CAT 1 / C	AT 1	CAT 1		CAT 1/	CAT 2
177		178		24	5
Gearbox					
540					
		Shear bo	t		
Standard					
Standard					
6, 9, 12 x 36		6, 9, 12 x	48	6, 9, 12, 18	3, 24 x 48
Optional (12)					
	\$\text{PD25.2}\$ \$\text{Standard}\$ 15 - 25 Limited CAT 1 / C. 177	Standard 15 - 25 Limited CAT 1 / CAT 1 177	STANDARD STANDARD PLUS PD25.21 PD35. Standard Standard PD35. Standard Standard PD35. PD35. Standard PD35. PD35. PD35. PD35. Standard PD35. PD35.	PD25.21 PD35.31 Standard Standard Plus 15 - 25	PD25.21 PD35.31 PD9



STUMP GRINDER

PERFORMANCE

Twenty-four tough, carbide steel teeth cut bidirectionally for increased productivity. Easily and efficiently grind tree stumps to mulch.

VERSATILITY

Grinds stumps 16" above and below ground level. Hinged debris shield allows for easier grinding below ground level.




	. Kozobi ilak kar	STANDARD	STANDARD PLUS	PROFESSIONAL	HEAVY-DUTY	EXTRA HEAVY-DUTY		
			TSG50	l				
Product Tier		Standard Plus						
Tractor PTO (HP)			15 - 50					
Tractor Hitch		CAT 1 / CAT 2						
Cutting Wheel Diameter (in)		20						
Cutting Wheel Speed (rpm)		1,037						
Cutter Tip Speed (fpm)		5,428						
Hub Torque (lbs/ft)		76 - 253						
Weight (lbs)	520							
Max Stump Height (in)	16							
Max Cutting Depth			16					

PRODUCT TIER KEY



SNOW REMOVAL ATTACHMENTS

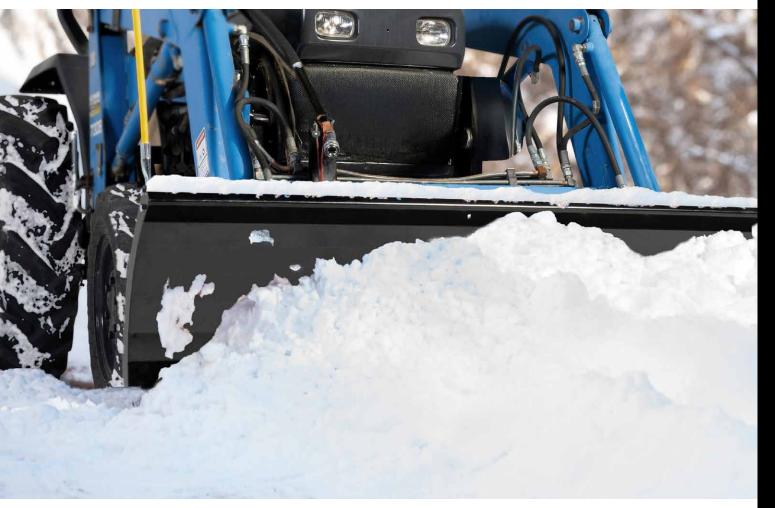



TOP 3 ADVANTAGES

1 | PROCESSES HEAVY SNOW

Woods snow blowers include shear bolt protection on the driveline to process heavy snow. The advanced-grade steel used in our loader front blades is stronger and more durable than standard steel.

2 IMPACT RESISTANT

Features like heavy-duty reinforced house on our snow blowers and trip moldboard protection on our loader front blades protect from hard, potentially damaging impacts hidden beneath heavy snow.

3 | EASY CONNECTION

Woods snow blowers are quick-hitch ready from the factory for easy tractor connection. Skid steer quick-attach mounting on our loader front blades allow operators to easily hook-up to the tractor.



MATCH MY APPLICATION

SNOW BLOWERS

For more frequent commercial or estate heavy-duty snow removal projects. Clear long driveways, large parking lots, and more expansive rural properties.



LOADER FRONT BLADES

Estate snow removal applications. Driveways, paths, rural properties. Ideal for smaller, less-frequent snow removal projects with compact or sub-compact tractors.



SNOW BLOWERS

LESS VIBRATION

Dynamically balanced auger and impeller for less vibration.

PROCESSES HEAVY SNOW

Shear bolt protection on driveline for processing heavy snow.


IMPACT RESISTANT

Heavy-duty reinforced housing withstands hard impacts.

6-YEAR GEARBOX WARRANTY

Industry-leading gearbox protection includes parts, labor, and seals under the Woods Cut Above $^{\text{TM}}$ Warranty Program.



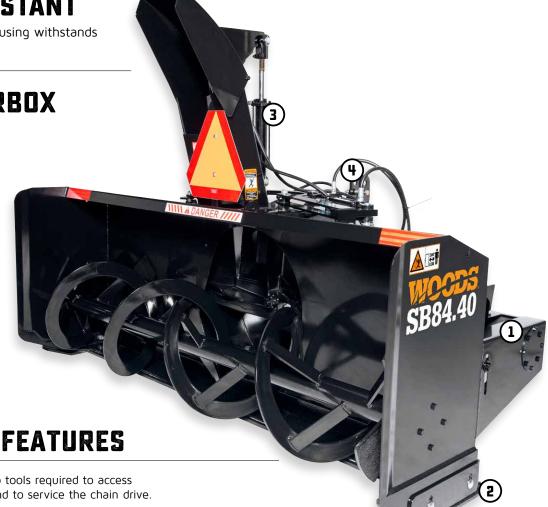

ADDITIONAL FEATURES

- Chain Drive Cover No tools required to access bearing, shear bolt, and to service the chain drive.
- **Skid Shoe** protects the frame and prevents wear. Replaceable and adjustable for height.
- 3 Standard Mechanical or Optional Hydraulic Chute Adjustments adjust the position of the chute.
- Quick-Hitch Ready from the factory making for easier tractor hook up.




PRODUCT TIER KEY STANDARD STANDARD PLUS EXTRA HEAVY-DUTY

	SB54.30	SB64.30	SB74.30	SB84.30	SB84.40	SB94.40	
Product Tier		Standa	rd-Plus		Professional		
PTO Power Requirements (HP)	15 - 30	20 - 40	30	- 50	35-	-90	
Operating Weight, Including Chute & Hyd. Deflector (lbs)	465	540	640	700	1130	1182	
Working Width (in)	53 1/2	63 1/2	74	84	84	94	
Working Height (in)	25 1/4		27 1/2		3	4	
Overall Width (in)	54 3/4	64 3/4	75 1/4	85 1/4	85 1/2	95 1/2	
Overall Length (in)	40 1/2	37 3/4	45	1/2	5	4	
Impeller Diameter (in)	22	24			27 1/2		
Impeller Width (in)	6	7		9	10 1/2		
Impeller (rpm)		54	540				
Main Auger Diameter (in)	15				20		
Auger driven system		Chain	No.60		Chain No.60 H		
Auger (rpm)	17	0	2	00	170		
Chute Rotation		Manual or	hydraulic		Hydraulic - cylinder (2"x8") including bracket, hoses, and tips		
Replaceable and Reversible		Ye	es		No		
Cutting Edge Dimension (in)		3/8 x	1 1/2		1/2	x 3	
Main Driving System	Driveline s	series 40	Driveline	series 50	6	0	
Chain Idler		Ye	Ye	es			
Number of Auger Shear Bolt		1 (on the d	1 (on the d	drive shaft)			
Number of Impeller Shear Bolt		1 (on the	driveline)		1 (on the	driveline)	
Type of Hitch	3 pts,	CAT 1	3 pts, CA	1 / CAT 2	CA	Т 2	
Parking Stand		Stan	dard		Stan	dard	



SCAN THIS CO



LOADER FRONT BLADES

IMPACT RESISTANT

1 The trip moldboard protects the blade, loader, and tractor if the edge of the blade contacts an obstacle.

PROCESSES HEAVY SNOW

Built with advanced-grade steel which stronger and more durable than standard steel. This feature allows the blade to be lighter, so the tractor can lift and move more snow per square foot than heavier competitive attachments.

EASY ADJUSTMENT

The lighter blade also makes for easy manual angle adjustments. Select from five adjustments for an overall 60° rotation. Optional hydraulic angle adjustment is also available.

EASY CONNECTION

2 Skid steer quick-attach mounting allows operators to easily hook-up to the tractor.





PRODUCT TIER KEY

STANDARD

STANDARD PLUS

PROFESSIONAL

LFB60.20

LFB72.20

Product Tier	Standard			
PTO Power Requirements (HP)	Up to 35			
Coupler System	Skid Steer Ç)uick-Attach*		
Maximum Tractor Weight (lbs)	28	300		
Weight (lbs)	201	225		
Moldboard Height (in)	2	21		
Moldboard Width (in)	59 1/4	71 1/4		
Moldboard Thickness (in)	.105" (12 gauge)			
Moldboard Material	Grade 80 High-Strength Steel			
Moldboard	Standard Spring Loaded Trip can be locked in position			
Cutting Edge Dimensions (in)	.25 x 6			
Cutting Edge Reverseable and Replaceable	Y	es		
Blade Angle	0°, 15° and 30° positions in either direction			
Blade Angle Adjustment	Standard Manual Blade Angle or Optional Hydraulic			
Skid Shoe	Standard Adjustable or Optional Urethane Kit			
Additional Options		Plow Guide Kit, Rubber Deflector, Kit, Hydraulic Angle Kit		

^{*} For compact and sub-compact tractors, not to be used with skid steers or track loaders.

ADDITIONAL FEATURES


- Rotating Skid Shoes Prevent Ground Gouging Steel skid shoe helps protect the cutting edge and prevents damage to textured surfaces. Offered as standard adjustable or optional Urethane.
- Reversible/Replaceable Cutting Edges Improves performance and extends working life of the attachment. Optional urethane cutting edge prevents damage to textured surfaces.
- Optional Plow Guide Kit offers a visual guide for the location of the blade's edge. Helps the operator prevent curb and wall strikes.
- Optional Rubber Deflector helps prevent snow from going over the top of the moldboard.
- Optional Hydraulic Angle Kit control the angle of the blade with the hydraulics of the tractor.



SCAN THIS CO

HAVE YOU TRIED MATCH MY TRACTOR?

Use Woods® Match My Tractor tool to find the **40HP and under** Woods products that are compatible with your tractor.

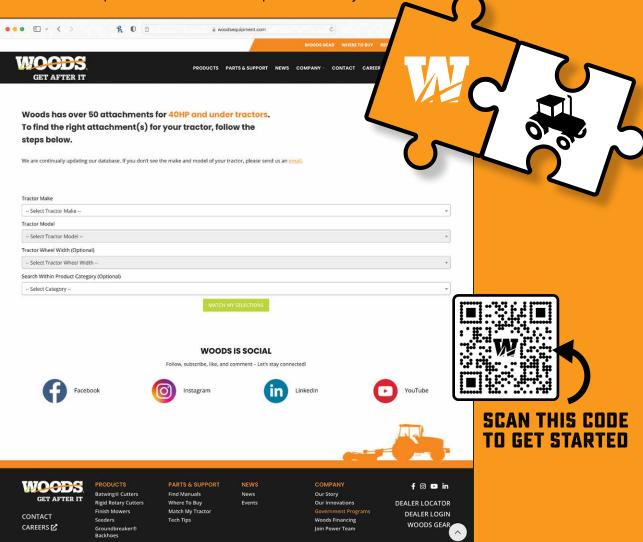

LOADER ATTACHMENTS





TOP 3 ADVANTAGES

1 VERSATILITY

Woods loader attachments offer a variety of optional features for increased versatility on the job.

2 DURABILITY

Built with durable, high-strength steel to handle tough loading jobs.

3 | EASY OPERATION

Woods loader attachments offer a variety of standard and optional features for increased ease of operation.



MATCH MY APPLICATION

BALE SPEARS

Efficiently move and stack round and large square bales. Compatible with compact tractors.

PALLET FORKS

Ideal for lifting and moving material with your loader. Choose from 2,200, 4,400, or 6,000 lb. fork capacities. Compatible with compact tractors.



PALLET FORKS

VERSATILITY

All Woods pallet forks come standard with a lifting clevis that has the same capacity as the forks for picking up loads with a lifting strap or chain.

DURABILITY

Certified, forged steel fork tines for strength, durability, and long life.


EASY OPERATION

Full-height frame with walkthru capability for easy access and optimum visibility.

ADDITIONAL FEATURES


- Lifting Clevis for lifting from a single point on the frame. Lift capacity equals fork tine capacity.
- (2) Walk-Through Frame offers easy access and optimum visibility.
- (3) Forged Steel Fork Tines for strength and long life.
- (4) Optional Side Steps for easily getting in to your skid steer.



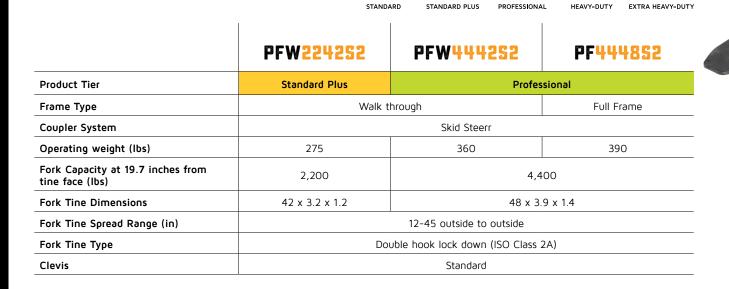

PRODUCT TIER KEY





FULL FRAME MODEL AVAILABLE*

*PF4448S2

PFW444852	

PFW664852

Professional	Heavy-Duty			
Walk th	rough			
Skid S	teer			
380	470			
4,400	6,600			
48 x 3.9 x 1.4	48 x 3.9 x 1.8			
12-45 outside to outside				
Double hook lock down (ISO Class 2A)				
Standard				



SCAN THIS CODE

BALE SPEARS

VERSATILITY

- (1) Single, Double, and Triple Bale Spears available to match your ideal application.
- (2) Vertical Backstops on the triple spear allow for stacking while transporting.

DURABILITY

Durable spears and high-strength steel frame for long life. Load tested at 3x the rated weight capacity.

EASY OPERATION

High carry load ratings increase overall performance. Optional step kit enables easier access to loader cabs.

BETTER VISIBILITY

Woods® orange spear makes it easier

for the operator to see.

PRODUCT TIER KEY

CTANDARD CTANDARD DILIC PROFESCIONAL HEAVY DUTY EXTRA HEAVY DUTY	STANDARD	STANDARD PLUS	PROFESSIONAL	HEAVY-DOTY	EXTRA HEAVT-DOTT
	STANDARD	STANDARD PLUS	PROFESSIONAL	HEAVY-DUTY	EXTRA HEAVY-DUTY

			1	1		
	MBS3044	BS3044S2	BS4032S2	BS4044S2	BS6044S2	
Product Tier	Standard	Standard	Professional	Professional	Heavy-Duty	
Number of Spears	1		3		2	
Number of Stabilizer Spikes	2		N/A			
Usable Spear Length (in)	44		32	32		
Spear Diameter (mm)	50		36		50	
Maximum Carry Load (lbs)	3,000		4,000		6,000	
Spear Material	Heat-treated round bar					
Frame Material	Welded steel plate					
Frame Dimensions (in) (W x H)	38.5 x 26.8	46.9 x 23.1	57.3	x 21.3	47.1 x 23.3	
Quick Attach Systems	Quick Hitch Ready CAT 1 3-Point Hitch	Skid Steer				
Step Kit	N/A	Optional				
Vertical Backstops	N/A		2		N/A	

SCAN THIS CODE




PARTS PROVENTO IN TO LIVE UP TO THE HIGHEST STANDARDS...



BLADES | BELTS | BUSHINGS | CHAINS & HOOKS | HARDWARE | IDLERS | WHEELS | TIRES | AND MORE!

WE ENGINEER OUR PARTS FOR QUALITY AND A PROPER FIT TO GIVE YOUR WOODS ATTACHMENT THE LONGEST POSSIBLE LIFESPAN.



WOODS_◎ | Woods Equipment Company 2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 **woodsequipment.com** Patent info at: woodsequipment.com/Our-Story



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2025 Woods Equipment Company. All rights reserved. WOODS and Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.