

WOODS
GET AFTER IT

PRODUCT GUIDE



**THE ONE AND ONLY
SINCE 1963**



AT WOODS, WE ARE INSPIRED BY THE WORK YOU DO EVERY DAY TO DO RIGHT BY THE LAND, AND YOUR BUSINESS.

That's why we create products that keep you moving forward, despite the endless challenges you face when working on the farm, ranch, or in the field.

Because we believe it is essential to continuously listen, observe, and truly understand your world, we've never stopped improving our products to help you tackle the toughest jobs. Our relentless pursuit of excellence extends beyond engineering every product for ideal performance. We also back our innovative designs with with intense scientific and field testing so there's no stone unturned, no room for errors. For more than 75 years, we've been proud to stand by our equipment so it stands up to the most important task – yours.

GET AFTER IT.

BATWING® CUTTERS | 5

- 12-foot Batwing® Cutter | 8
- 10 and 15-foot Batwing® Cutters | 9
- 13 and 20-foot Batwing® Cutters | 12
- BW15 Series Batwing® Overhaul Kit | 14

RIGID ROTARY CUTTERS | 15

- BrushBull™ Single-spindle Premium Cutters | 18
- RC-Series Single-spindle Standard Cutters | 22
- Dual-spindle Cutters | 23

FINISH MOWERS | 27

- TurfKeeper® Rear-mount Mowers | 28
- TurfKeeper Pro® Rear-mount Mowers | 29
- RD990X Rear-mount Mower | 30
- Turf Batwing® Estate Mower | 31
- Turf Batwing® Commercial Mowers | 32

SEEDERS | 33

- Compact Super Seeders | 36
- Food Plot Seeders | 38
- Precision Super Seeders™ | 39

GROUNDBREAKER® BACKHOES | 41

- 6.5-foot Groundbreaker® Backhoe | 44
- 7.5-foot Groundbreaker Backhoe | 44
- 8.5-foot Groundbreaker Backhoe | 46
- 10-foot Groundbreaker Backhoe | 46

TILLAGE EQUIPMENT | 47

- Rotary Tillers | 50
- Disc Harrows | 51

DIRT WORKING | 52

- Quick Hitch | 52
- Woods® Box Scrapers | 53
- Grading Scrapers | 54
- Rear Blades | 56
- Landscape Rakes | 58
- Post Hole Diggers | 59
- Stump Grinder | 60

FLAIL SHREDDERS | 61

WOODS® LOADER ATTACHMENTS | 62

- Bale Spears | 64
- Pallet Forks | 65

GET AFTER IT... ONLINE

There are many features on our website that make it easy for you to find and compare products, get a quote, or connect with your Woods dealer.

www.woodsequipment.com



Use the Match My Tractor tool to find the 40HP and under Woods products that are compatible with your tractor.



Which model is best for your needs? Use our Product Compare to view product features and specifications side-by-side.



Woods dealers are the best source for choosing the right equipment. Use our Dealer Locator to easily find the one closest to you.



Found the right product? Great. Easily add it to a Quote Request and send it directly to your Woods dealer for the best pricing or incentives.



IMPLEMENTS FOR COMPACT AND SUB-COMPACT TRACTORS

We offer over 50 models for your compact and sub-compact tractors. Look for this icon throughout this product guide and our website to find the right implement for your next project.



MATCH MY TRACTOR

Use the Match My Tractor tool to find the 40HP and under Woods products that are compatible with your tractor.



WOODS
GET AFTER IT

PRODUCTS PARTS & SUPPORT NEWS COMPANY CONTACT CAREERS Search Products

Match My Tractor

Woods has over 50 attachments for 40HP and under tractors. To find the right attachment(s) for your tractor, follow the steps below.

We are continually updating our database. If you don't see the make and model of your tractor, please send us an [email](#).

Tractor Make
-- Select Tractor Make --

Tractor Model
-- Select Tractor Model --

Tractor Wheel Width (Optional)
-- Select Tractor Wheel Width --

Search Within Product Category (Optional)
-- Select Category --

MATCH MY SELECTIONS

WOODS IS SOCIAL
Follow, subscribe, like, and comment - Let's stay connected!

Facebook Instagram LinkedIn YouTube

WOODS
GET AFTER IT

CONTACT
CAREERS

PRODUCTS
Batwing® Cutters
Rigid Rotary Cutters
Finish Mowers
Seeders
Groundbreaker®
Backhoes
Tillers

PARTS & SUPPORT
Find Manuals
Where To Buy
Match My Tractor
Tech Tips


NEWS
News
Events

COMPANY
Our Story
Our Innovations
Government Programs
Woods Financing
Join Power Team

f @ in
DEALER LOCATOR
DEALER LOGIN
WOODS GEAR



BATWING[®] CUTTERS

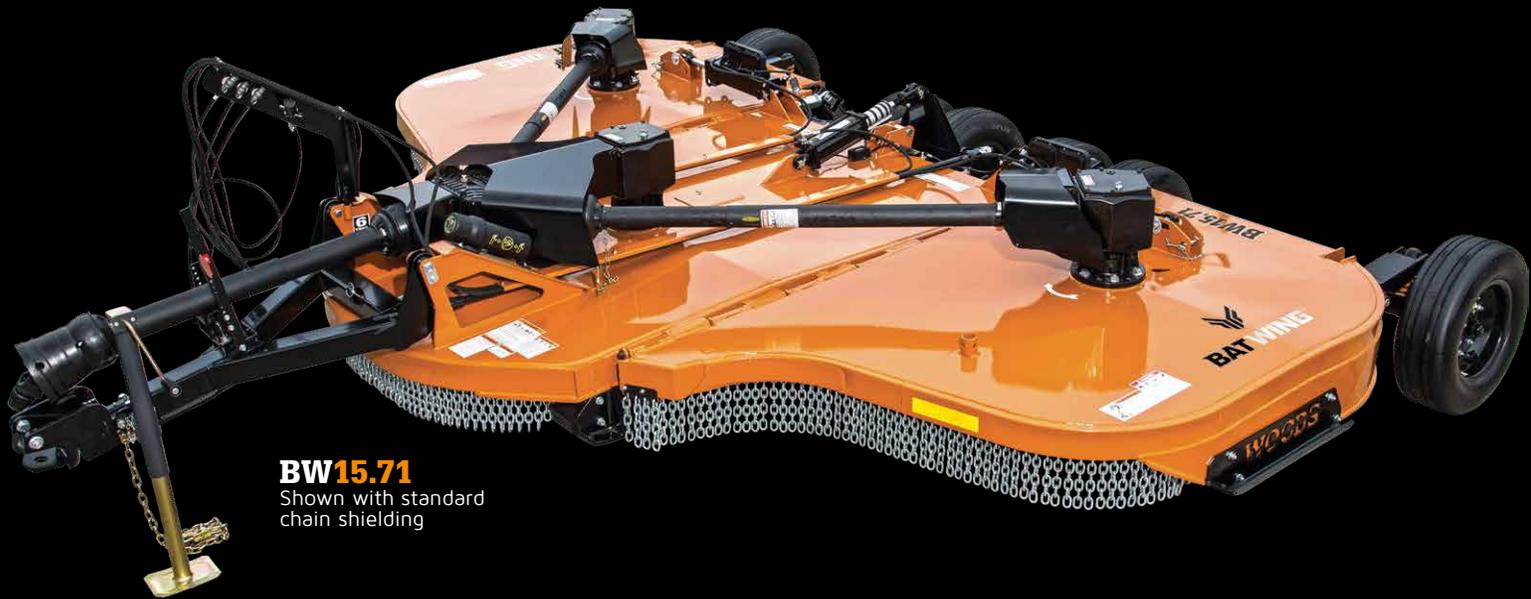

BW15.71
Shown with standard
chain shielding

IF IT'S NOT WOODS[®], IT'S NOT A BATWING[®] CUTTER.

The customer-designed 15-foot series Batwing[®] from Woods. It's more reliable, more durable, easier-to-use, easier-to-maintain and built to perform better. It's the flexwing cutter you always wanted, you just needed a company to build it.



15-FOOT BATWING® CUTTERS

PROVEN DURABILITY

We not only build the toughest cutter, we build the only Batwing® cutter. But, don't just choose us for our name, choose us for the hours of testing in extreme conditions, the rugged sub-structure, and the industry-leading welding and paint standards. Choose the Batwing® cutter for the sheer ability to tame the most unruly fields, waterways, pastures and roadsides.

PTO LIFT ASSIST

Patented driveline lift assistance system makes it easy to hook up—and is standard on all models.

SLOPED DECK


Smooth, sloped steel decks shed water and debris.

INTEGRATED CHAIN SHIELDING

Chain shielding is integrated with the frame to prevent damage.

ROUNDED WINGS & CURVED LEADING EDGE

Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.

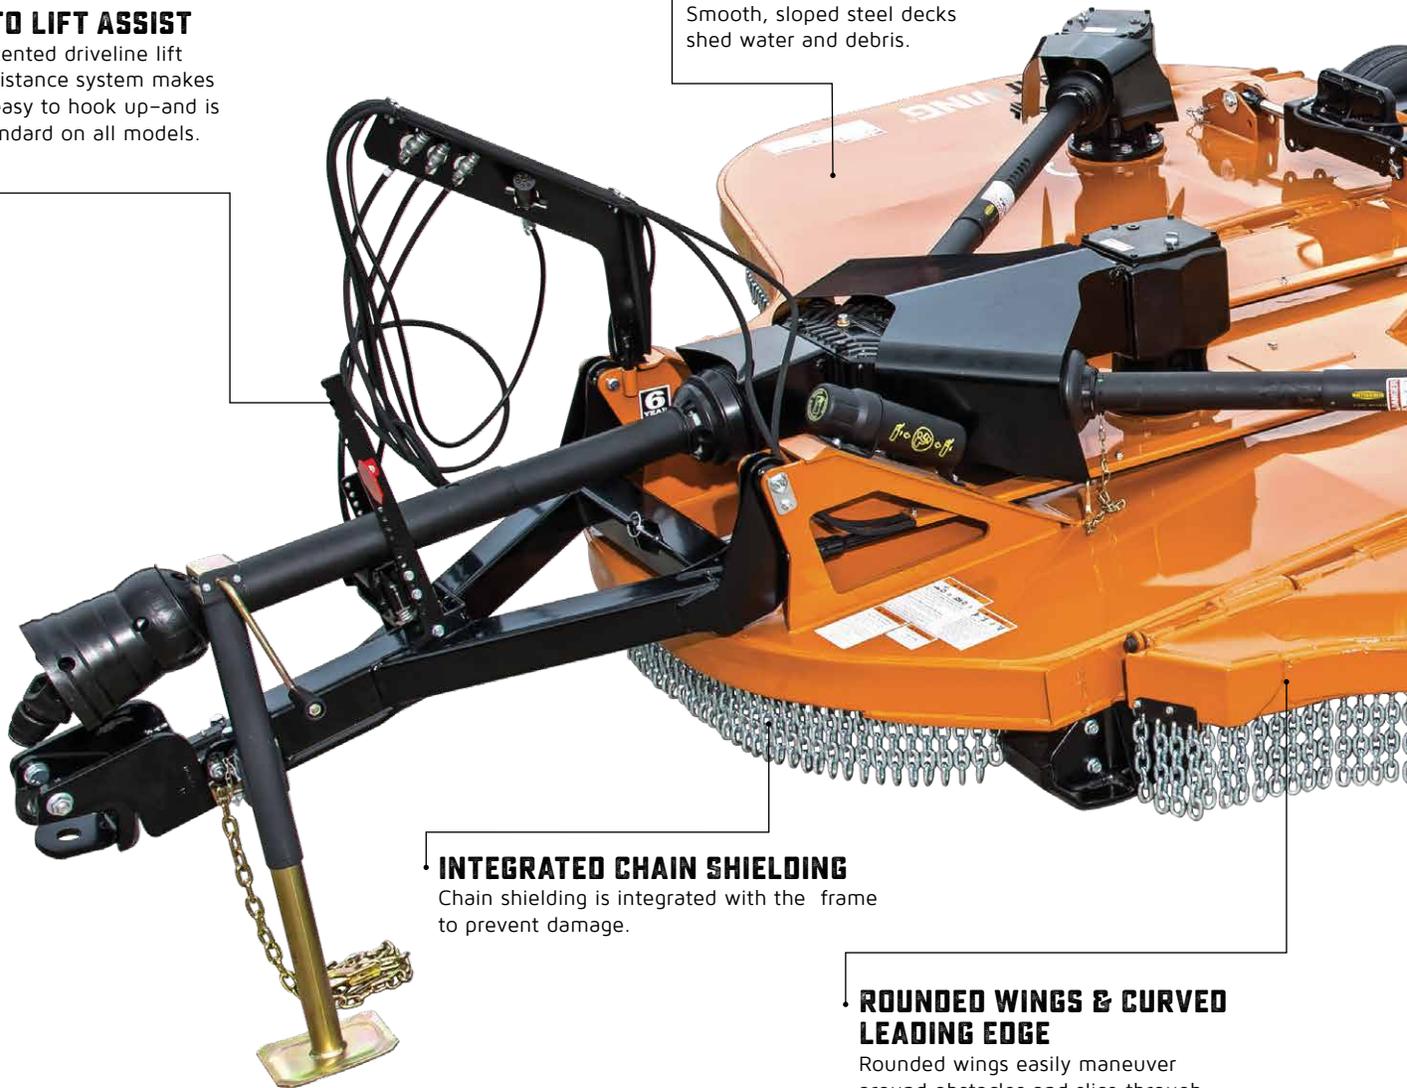

UNBEATABLE PERFORMANCE

The Batwing® cutter is designed with a high torque capacity, a deep deck with welded baffles, and our easy tractor hook-up so you will get to work quickly and mow more material in less time. Woods Batwing® cutters set the standard for cut quality, distribution and ease of use, whether you're cutting brush or shredding stalks.

DURABLE CONSTRUCTION

Woods was the first brand to introduce a smooth, sloped deck that sheds debris. Raising components off the deck makes clean-up easy and covering hoses protects from wear and damage. Bolt-on, heavy-duty skid shoes with an 'approachable' leading edge reduce sod damage when turning and protect the deck from damage.

SKID SHOES

Bolt-on, heavy-duty skid shoes with an "approachable" leading edge reduce sod damage when turning.



EASY MAINTENANCE

Patented greasable Quick-change blade pins are easy to remove.



EXTREMELY STRONG STRUCTURE

A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.

HEAVY-DUTY GEARBOXES

Massive, heavy-duty gearboxes deliver more cutting power and performance.



Our advanced gearbox seal technology, designed for hard conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.



RC 12-FOOT BATWING® CUTTER



BW12
Shown with standard chain shielding

TRACTOR PTO HP RANGE: 35 - 65 HP

BW12 | 12-foot Flexwing Cutter for compact/utility tractors

Requiring a minimum of 35 hp, the BW12 gives you Woods quality and performance in a sleek, round-front design and our industry-leading sloped deck.

- Total weight 2,450 lbs with 750 lb tongue weight, ideal for use on lower horsepower compact and utility tractors.
- Twelve gauge, high-strength steel and smooth, sloped deck provide durability for long life.
- Easy hook-up reduces preparation time and frustration.
- Fully baffled deck, ensures better distribution of cut material.
- Standard chain shielding, for added safety and peace of mind.

* **NOTE:** All Batwing® models pass all applicable safety standards for thrown object without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that standard chain shielding be used for extra protection.



MODEL	BW12
Tractor PTO (HP)	35 - 65
Tractor Hitch	Swivel clevis
Cutting Width (ft)	12
Adjustable Cutting Height (in)	2 - 12
Cut Capacity Diameter (in)	1.5
Gearbox Rating (HP)	160 - splitter / 75 - center and wing
Blade Tip Speed (fpm)	14,300 center / 14,900 wing
Side Frame Thickness (ga)	7
Side Skirt Depth (in)	11
Tractor PTO (rpm)	540
Transport Width (in)	96
Deck Type	Smooth, sloped
Deck Thickness (in)	0.105
Weight (lbs)	2450
Number of Gearcases	4
Blade Thickness (in)	0.5
Blade Width (in)	4
Blade Overlap (in)	6
Material Flow System	Fully baffled deck
Stump Jumper	Oval
Hydraulics Wing Flex (degrees)	90 up, 22 down
Wheel Type (in)	21 laminated, 24 severe-duty Ag
Suspension	Spring on center section
Driveline Rating	CAT 4 CV main; CAT 3 wing
Cutting Area Shielding	Standard chain shielding
Gearbox Warranty	6-year limited
Output Shaft Size (in)	1.57 dia
Tongue Weight (lbs)	750



15-FOOT BATWING® CUTTERS

RC

DESIGNED WITH INPUT FROM USERS LIKE YOU, THE BW15.51, BW15.61, BW15.71, AND THEIR ONE-WINGED MODELS, SET A NEW INDUSTRY STANDARD FOR DURABILITY, RELIABILITY, PERFORMANCE AND EASE. WE THINK YOU'LL AGREE THAT IT'S THE BEST BATWING® EVER.

TRACTOR PTO HP RANGE: 45 - 200 HP

BW10.51 | 10.5-foot Single-wing Flexwing cutter

BW15.51 | 15-foot Flexwing cutter

The BW15.51 is ideal for cutting tall grasses and saplings up to 3 inches in diameter.

- Patented driveline lift assistance system makes it easy to hook up. Standard on all models.
- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- Our gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Patented greasable Quick-change blade pins are easy to remove.



BW15.51

Shown with standard chain shielding

MODEL	BW10.51 ¹	BW15.51
Tractor PTO (HP)	45 - 200	
Tractor Hitch	Swivel clevis	
Tractor PTO (rpm)	540 or 1,000	
Adjustable Cutting Height (in)	1 - 15	
Cut Capacity Diameter (in)	3	
Cutting Width (in)	126	180
Blade Tip Speed (fpm)	15,000 at 540 rpm / 16,000 at 1000 rpm	
Blade Thickness (in)	0.5	
Blade Width (in)	4	
Blade Overlap (in)	6	
Weight (lbs)	4,130	4,340
Tongue Weight (lbs)	1,200	
Side Skirt Thickness (in)	.25	
Side Skirt Depth (in)	13	
Transport Width (in)	93	96
Material Flow System	Strategically placed, welded baffles	
Stump Jumper	Round	
Deck Type	Smooth, sloped	
Deck Thickness (in)	0.135	
Number of Gearcases	4	
Hydraulics Wing Flex (degrees)	90 up, 22 down	
Suspension	Single spring on center wheel yolk	
Cutting Area Shielding	Single or double chain	
Wheel Type	21 in. laminated; 25 in. severe-duty Ag; 29 in. used aircraft	
Driveline Rating	CAT 6 CV main; CAT 4 wing	
Splitter Gearbox Rating (hp)	210	
Center/Wing Gearbox Rating (hp)	200	
Output Shaft Size (in)	2 dia	
Gearbox Warranty	6-year limited	
LED Light Kit	Standard	
Options	<ul style="list-style-type: none"> • Double row chain shielding • Dual wheels 	

¹ Single-wing



BW10.51

Shown with standard chain shielding

NOTE: 15' Batwing® series no longer offered with hinged metal wing gearbox shields.

15-FOOT BATWING® CUTTERS



TRACTOR PTO HP RANGE: 55 - 275 HP

BW10.61 | 10.5-foot Single-wing Flexwing cutter
BW15.61 | 15-foot Flexwing cutter

The BW15.61 easily powers through tall brush and trees up to 4 inches in diameter.

TRACTOR PTO HP RANGE: 65 - 300 HP

BW10.71 | 10.5-foot Single-wing Flexwing cutter
BW15.71 | 15-foot Flexwing cutter

The rugged BW15.71 can tame the harshest conditions – heavy brush and trees up to 4.5 inches in diameter. Ideal for professional and contract cutting.

SLOPED DECK

Smooth and sloped heavy-duty steel decks shed water and debris; deck design and baffling helps recut material, ensuring a finer shred and more even distribution.

GEARBOXES

Massive, heavy-duty gearboxes deliver more cutting power and performance with a six-year limited warranty.



BW15.61
 Shown with standard chain shielding

NOTE: 15' Batwing® series no longer offered with hinged metal wing gearbox shields.

15-FOOT BATWING® CUTTERS

RC

MODEL	BW10.61	BW15.61	BW15.71 ¹
Tractor PTO (HP)	55-275		65-300
Tractor Hitch	Swivel clevis		
Adjustable Cutting Height (in)	1 - 15		
Cutting Capacity Diameter (in)	4		4.5
Cutting Width (in)	126	180	
Blade Tip Speed (fpm)	15,700 at 540 rpm 16,000 at 1,000 rpm		
Blade Thickness (in)	0.5		
Blade Width (in)	4		
Blade Overlap (in)	6		
Material Flow System	Strategically placed, welded baffles		
Weight (lbs)	4,652	4,454	4,840
Tongue Weight (lbs)	1,350		
Side Skirt Thickness (in)	.25		
Side Skirt Depth (in)	13		
Tractor PTO (rpm)	540 or 1,000		
Transport Width (in)	93	96	
Deck Type	Smooth, sloped		
Deck Thickness (in)	0.179		0.25
Number of Gearcases	4		
Stump Jumper	Round		
Suspension	Single spring on center wheel yolk or spring-loaded axles		
Cutting Area Shielding	Single or double chain		
Wheel Type	15 in. rims, 21 in. laminated severe-duty Ag, or 29 in. used aircraft		
Hydraulics Wing Flex (degrees)	90 up / 22 down		
Driveline Rating	CAT 6 CV main / CAT 4 wing		CAT 6 CV main / CAT 5 wing
Splitter Gearbox Rating (HP)	275		
Center/Wing Gearbox Rating (HP)	225		
Output Shaft Size (in)	3 dia		
Gearbox Warranty	6-year limited		
LED Light Kit	Standard		
Options	<ul style="list-style-type: none"> • Double row chain shielding • Dual wheels • Shredding kit 		

¹ Single-wing



NOTE: 15' Batwing® series no longer offered with hinged metal wing gearbox shields.

- Patented driveline lift assistance system makes it easy to hook up.
- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- Our gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Patented greasable Quick-change blade pins are easy to remove.
- Strategically placed, welded baffles cut and distribute debris evenly.

SKID SHOES

Bolt-on, heavy-duty skid shoes with an "approachable" leading edge reduce sod damage when turning.

BW15.71

Shown with standard chain shielding

20-FOOT BATWING® CUTTERS

TRACTOR PTO HP RANGE: 70 - 200 HP

BW20.51 | 20-foot Flexwing Cutter

- Main driveline: CAT 6 CV
- Cuts brush up to 2 inches in diameter
- Walking tandem axle available

TRACTOR PTO HP RANGE: 70 - 300 HP

BW20.61 | 20-foot Flexwing Cutter

- Main driveline: CAT 6 CV
- Cuts brush up to 3 inches in diameter
- Side frame depth of 13.25 inches —the deepest in the industry
- Optional shredding kit

MODEL	BW20.51	BW20.61
Tractor PTO HP	70-200	70-300
Main Driveline	CAT 6 CV	
Wing Driveline	CAT 5 heavy telescoping profile	
Tractor Hitch	Pivoting clevis	Clevis/self-leveling clevis; optional pintel ring
Cutting Width (in)	240	
Adjustable Cutting Height (in)	2-15	
Cutting Capacity Diameter (in)	2	3
Side Skirt Depth (in)	13.25	
Tractor PTO (rpm)	540 or 1,000	
Transport Width (in)	123	
Deck Type	Smooth, sloped	
Deck Thickness (in)	.135	
Side Skirt Thickness (in)	.25	
Weight (lbs)	6,435	6,600
Tongue Weight (lbs)	2,400	
Number of Gearcases	4	
Output Shaft Size (in)	2	2.38
Gearbox Rating (HP)	250 - splitter, 120 - center and wing	250 - splitter, 205 - center and wing
Blade Thickness (in)	.5	
Blade Width (in)	4	
Blade Overlap (in)	6	
Blade Tip Speed (fpm)	15,450 at 540 rpm 16,300 at 1,000 rpm	
Material Flow System	Standard baffles	
Stump Jumper Type	Standard round-welded	
Hydraulics Wing Flex (degrees)	90 up, 22 down	
Suspension	Standard spring suspension or tandem spring arms	
Wheel Type	15 in. rims; 21 in. laminated; 25 in. severe duty AG or 29 in. used aircraft	
Cutting Area Shielding	Single or double chain	
Gearbox Warranty	6-year limited	
Options	<ul style="list-style-type: none"> • Double row chain shielding • Tandem spring arm suspension • Pintel ring hitch 	<ul style="list-style-type: none"> • Double row chain shielding • Tandem spring arm suspension • Pintel ring hitch • Shredding kit
Driveline Rating	CAT 6 CV main / CAT 5 HEAVY wing	
LED Light Kit	Standard	

GREASABLE PIVOT PINS

Greasable pivot points are located on turnbuckle and axle arms to increase durability and reduce wear.



EASY MAINTENANCE

Patented greasable Quick-change blade pins are easy to remove.



BW20.51


Shown with standard chain shielding

• **NOTE:** All Batwing® models pass all applicable safety standards for thrown object without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that chain shielding be used for extra protection.

TRACTOR PTO HP RANGE: 70 - 300 HP

BW13.71 | 13.5-foot Single-wing Flexwing Cutter
BW20.71 | 20-foot Flexwing Cutter

- Main driveline: CAT 6 CV
- Deck plate has two layers of .135 inch plate
- Cuts brush up to 4 inches in diameter
- Side frame depth of 12.5 inches
- Optional dual tires available for wings
- Optional shredder kit or optional blade ring
- Six-year gearbox limited warranty

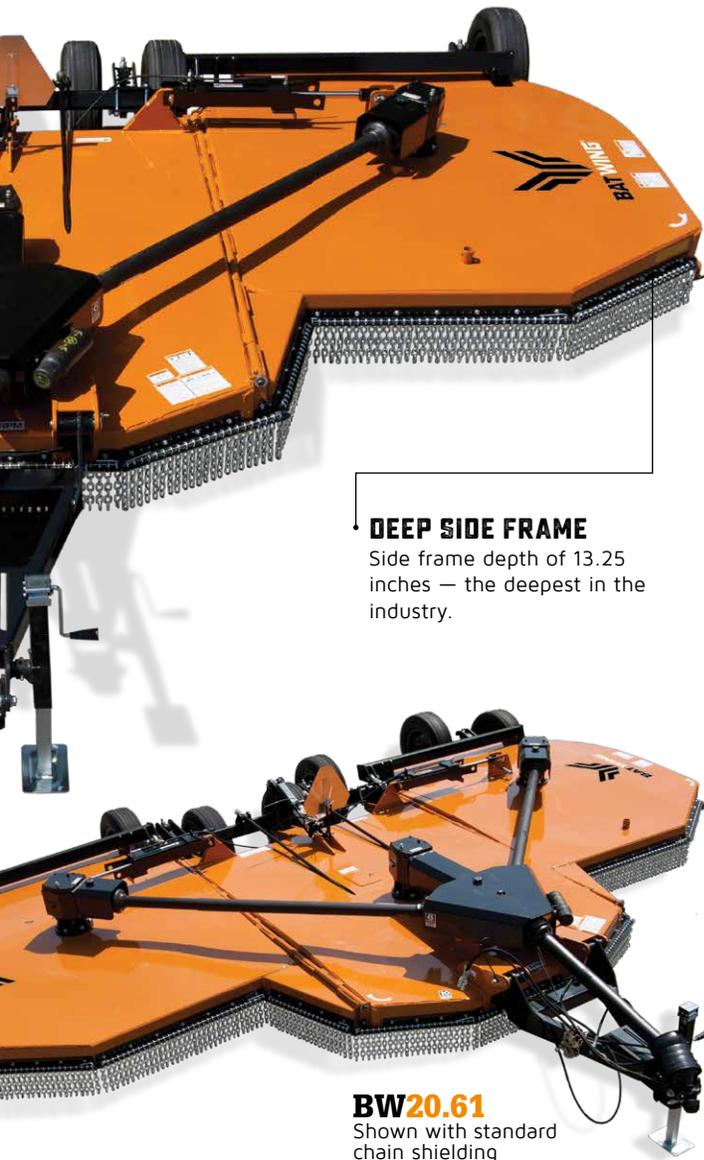

DEEP SIDE FRAME

Side frame depth of 13.25 inches — the deepest in the industry.

BW20.61
Shown with standard chain shielding

MODEL	BW13.71 ¹	BW20.71
Tractor PTO (HP)	70-300	
Driveline Rating	CAT 6 CV main / CAT 5 HEAVY wing	
Tractor Hitch	Self-leveling swivel clevis; optional pintel ring	
Cutting Width (in)	162	240
Adjustable Cutting Height (in)	2-15	
Cutting Capacity Diameter (in)	4	
Side Skirt Depth (in)	12.5	
Tractor PTO rpm	540 or 1,000	
Transport Width (in)	99	123
Deck Type	Smooth, sloped double-deck	
Deck Thickness (in)	.135 / .135 upper/lower	
Side Skirt Thickness (in)	.25	
Weight (lbs)	7,860	7,740
Tongue Weight (lbs)	2,870	2,700
Gearbox Rating (HP)	275 - splitter, 225 - center and wing	
Number of Gearcases	3	4
Output Shaft Size (in)	2.38	
Blade Thickness (in)	.5	
Blade Width (in)	4	
Blade Overlap (in)	6	
Blade Tip Speed (fpm)	15,450 at 540 rpm 16,300 at 1,000 rpm	
Material Flow System	Standard baffles	
Stump Jumper Type	Standard round-welded	
Hydraulics Wing Flex (degrees)	Left or right wing - 90 up, 22 down	90 up, 22 down
Suspension	Standard spring suspension or optional tandem spring arms	
Wheel Type	15 in. rims; 21 in. laminated; 25 in. severe-duty Ag; or 29 in. used aircraft	
Cutting Area Shielding	Single or double chain	
Gearbox Warranty	6-year limited	
Options	<ul style="list-style-type: none"> • Double row chain shielding • Tandem spring arm suspension • Pintel ring hitch • Deck ring 	<ul style="list-style-type: none"> • Double row chain shielding • Tandem spring arm suspension • Pintel ring hitch • Deck ring • Shredding kit
LED Light Kit	Standard	

¹ Single-wing

BW15 SERIES BATWING® OVERHAUL KIT

PART NUMBER 620934

EVERYTHING YOU NEED IN ONE BOX TO OVERHAUL YOUR
BW15 SERIES BATWING®.

The off-season is the perfect time to go over your mowers and cutters to address any issues that may result in down-time when it's go-time. Most times it calls for a replacement of the major wear components. So in an industry first, now all the major wear components are available in one kit as one part number, and priced 10% lower than if you were to purchase the individual components.



FEATURES

- Ease of Order – One part number for everything you need to complete a basic overhaul on a BW15 series Batwing® rotary cutter.
- Greater Savings – Save 10% on a kit versus purchasing the individual parts.
- Reduced Downtime – Reduce in-season downtime, or eliminate it altogether, by replacing all major wear components in one pass.

CONTENTS

Kit includes everything you would need to replace the major wear components of a BW15.51¹ or BW15.61¹ including:

- 6 - Rotary Cutter Blades;
- 6 - Greasable Blade Pins;
- 6 Sets - Slip Clutch Plates;
- Patented Greasable Blade Components and Hardware.

¹ When ordering the kit for a BW15.71, add 3 additional sets of slip clutch plates to your order.

**ORDER YOUR BW15 SERIES BATWING® OVERHAUL KIT TODAY FROM
YOUR LOCAL AUTHORIZED WOODS DEALER.**

RIGID ROTARY CUTTERS



BB84.40
Shown with standard
chain shielding

RELIABULL. DURABULL. PREFERABULL.

Put our products to the test in your own back yard. Rugged, dependable and productive — Woods rotary cutters are designed for the extremes of real world use.



EASY TO OPERATE

Customers like you told us what's important in a single-spindle cutter. Then, we redesigned our premium BrushBull™ cutter to meet – and exceed – your needs. An adjustable drive lift hanger and quick-hitch readiness make it easy to attach. A large access window on top of the deck and our exclusive, patented greasable Quick-change blade pins make blade changes easy, even in the field. But, you're not sacrificing performance for ease. A deep deck, large half-inch by four-inch blade and welded baffle work together, creating a strong suction that lifts, then evenly cuts and distributes large amounts of material.

PROVEN DURABILITY

Choose a BrushBull for the hours of testing in extreme conditions, and a Z-shaped, high-strength steel bumper that's twice as thick as competitive models, for added durability when backing over tough brush. Or, choose Woods for the advanced gearbox seal technology that's so good our 6-year limited warranty includes the seals. That's worry-free reliability.

EASY TO MAINTAIN

Woods was the first to introduce a smooth, sloped deck that sheds debris. Front corners angle back to give operators more room between the tractor tire and cutter.



QUICK-HITCH READY

DRIVELINE HANGER

Adjustable driveline hanger makes it easier to attach, and is standard on all models.

MORE ROOM

Corners angle back to give operators more room between the tractor tire and cutter when connecting and disconnecting cutter to tractor.

SKID SHOES

Full-length, bolt-on skid shoes protect the deck and are easy to change. Adjust the height on heavy-duty models.

SLOPED DECK

Smooth, sloped deck sheds debris and is easy to clean.

BRUSHBULL™ SINGLE-SPINDLE PREMIUM CUTTERS

RC



HEAVY-DUTY GEARBOXES

Our advanced gearbox seal technology is designed for hard conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.

EASY MAINTENANCE

Patented Quick-change blade pins are easy to maintain and remove.



PATENTED GREASABLE BLADE SYSTEM

A large blade access hole makes it easy to reach our exclusive patented Quick-change pins and quickly change the blade from the top of the deck.



HIGH-STRENGTH STEEL

High-strength steel bumper is 2-times thicker than competitive models, with a Z-channel frame for added durability when backing over tough brush.

BB60.30

Shown with optional chain shielding

OUR MOST POPULAR MODELS ARE IDEAL FOR CLEARING BRUSH ALONG FENCE ROWS, MAINTAINING MILES OF INTERSTATE HIGHWAYS, AND CUTTING OVERGROWN GRASS, WEEDS AND BRUSH WHEREVER YOU NEED TO TAME THE LAND.

TRACTOR PTO HP RANGE: 15 - 90 HP

BB48.30 | 48-inch

BB60.30 | 60-inch

BB72.30 | 72-inch

- Three-point hitch: CAT 1, quick-hitch ready
- Cuts brush up to two inches in diameter
- Six-year limited gearbox warranty includes the seals
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality



TRACTOR PTO HP RANGE: 35 - 150 HP

BB84.40 | 84-inch

- Three-point hitch: CAT 1 & CAT 2, quick-hitch ready
- Cuts brush up to two inches in diameter
- Six-year limited gearbox warranty includes the seals
- Eleven-inch deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality
- Choose an optional dual tailwheel for adjusting the mowing height



BB48.30

Shown with optional chain shielding

BRUSHBULL™ SINGLE-SPINDLE PREMIUM CUTTERS

RC



MODEL	BB48.30	BB60.30	BB72.30	BB84.40
Tractor PTO (HP)	15-50	25-50	30-90	35-150
Hitch Category/Type	CAT 1 clevis			CAT 1 & CAT 2 clevis
Cutting Width (in)	48	60	72	84
Total Weight with Chain Shield (lbs)	635	728	882	1,132
Cutting Capacity Diameter (in)	2			
Adjustable Cutting Height (in)	1 - 9		2 - 12	
Transport Width (in)	55	67	79	91
Overall Length (in)	86	99	111	124
Tractor PTO Speed (rpm)	540			
Quick-hitch Ready	Yes			
Rear Bumper	Z-channel			
Frame & Deck Support (in)	3 x 3 tube			
Deck Construction	Smooth top, sloped			
Skid Shoes	Full-length, replaceable			
Deck Thickness (in)	0.105		0.12	
Side Frame Thickness (in)	0.135			
Side Frame Depth (in)	10.5			11.6
Gearbox Warranty	6-year limited			
Gearbox (HP)	65		75	90
Output Shaft Diameter (in)	1.57			2
Blade Tip Speed (fpm)	13,000	14,335	14,963	15,086
Blade Dimensions (in)	.50 x 4			
Blade Pin Diameter (in)	1.50			
Blade Carrier	Oval stump jumper			
Driveline Protection	Slip-clutch			
Options	Check chain			Check chain, dual tailwheel



BB72.30
Shown with optional chain shielding

BRUSHBULL™ SINGLE-SPINDLE PREMIUM CUTTERS

TRACTOR PTO HP RANGE: 30 - 150 HP

BB60.50 | 60-inch

BB72.50 | 72-inch

BB84.50 | 84-inch


- Three-point hitch: CAT 1 & CAT 2, CAT 2 & CAT 3, quick-hitch ready
- Cuts brush up to three inches in diameter
- Six-year limited gearbox warranty includes the seals
- High-strength 10 gauge steel deck manufactured for tough conditions
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality



MODEL	BB60.50	BB72.50	BB84.50
Tractor PTO (HP)	30-150		40-150
Hitch Category/Type	CAT 1 & CAT 2 clevis		CAT 2 & CAT 3 clevis
Cutting Width (in)	60	72	84
Total Weight with Chain Shield (lbs)	974	1,125	1,336
Cutting Capacity Diameter (in)	3		
Adjustable Cutting Height (in)	2 - 12		
Transport Width (in)	67.3	79.3	91.3
Overall Length (in)	100	112	124
Tractor PTO Speed (rpm)	540		
Quick-hitch Ready	Yes		
Rear Bumper	Z-channel		
Frame & Deck Support (in)	3 x 3 tube		
Deck Construction	Smooth top, sloped		
Skid Shoes	Full-length, replaceable		
Deck Thickness (in)	0.135		
Side Frame Thickness (in)	0.25		
Side Frame Depth (in)	12.7		
Gearbox Warranty	6-year limited		
Gearbox (HP)	150		
Output Shaft Diameter (in)	2		
Blade Tip Speed (fpm)	15,525	15,900	16,000
Blade Dimensions (in)	.50 x 4		
Blade Pin Diameter (in)	1.5		
Blade Carrier	Diamond stump jumper, optional round		
Driveline Protection	Slip-clutch		
Options	Check chains, round stump jumper	Check chains, round stump jumper, dual tailwheel	

COUNT ON THE INTEGRITY OF THE BRUSHBULL FRAME

- Stress points are tied to full-length 3-inch by 3-inch tubes, not on the deck plate, for added stability.
- A full frame design means strength and durability are built into every BrushBull from the frame out.
- The rear bumper is a Z-shaped channel that's two-times thicker than competitive models, adding structural integrity when backing over brush.

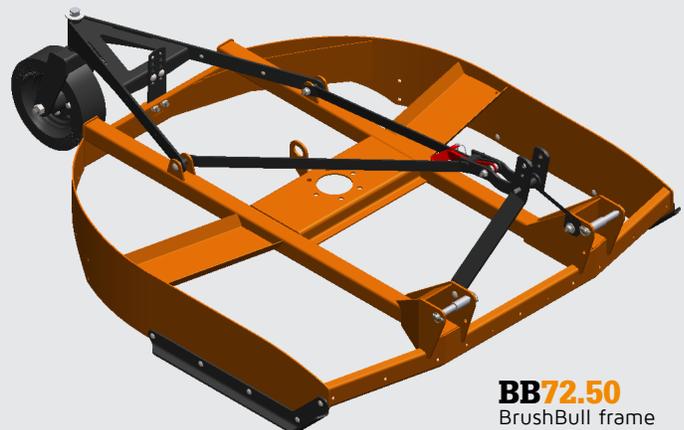

BB72.50
BrushBull frame

BRUSHBULL™ SINGLE-SPINDLE PREMIUM CUTTERS

RC

TRACTOR PTO HP RANGE: 40 - 210 HP

BB60.60 | 60-inch

BB72.60 | 72-inch

BB84.60 | 84-inch

- Three-point hitch: CAT 1 & CAT 2, CAT 2 & CAT 3, quick-hitch ready
- Cuts brush and saplings up to four inches in diameter
- Six-year limited gearbox warranty includes the seals
- High-strength 10 gauge steel deck is made for extreme conditions
- Deck is 12.7 inches deep, with half-inch by four-inch blades, and rear baffling that work together to evenly cut and distribute large amounts of material, for a superior cut quality

MODEL	BB60.60	BB72.60	BB84.60
Tractor PTO (HP)	40-150	50-210	65-210
Hitch Category/Type	CAT 1 & CAT 2 clevis		CAT 2 & CAT 3 clevis
Cutting Width (in)	60	72	84
Total Weight with Chain Shield (lbs)	1,045	1,210	1,440
Cutting Capacity Diameter (in)	4		
Adjustable Cutting Height (in)	2 - 12		
Transport Width (in)	67.3	79.3	91.3
Overall Length (in)	100	112	124
Tractor PTO Speed (rpm)	540		
Quick-hitch Ready	Yes		
Rear Bumper	Z-channel		
Frame & Deck Support (in)	3 x 3 tube		
Deck Construction	Smooth top, sloped		
Skid Shoes	Adjustable height full-length, replaceable		
Deck Thickness (in)	0.135		
Side Frame Thickness (in)	0.25		
Side Frame Depth (in)	12.7		
Gearbox Warranty	6-year limited		
Gearbox (HP)	210		
Output Shaft Diameter (in)	3		
Blade Tip Speed (fpm)	13,570	13,945	14,250
Blade Dimensions (in)	.50 x 4		
Blade Pin Diameter (in)	1.5		
Blade Carrier	Diamond stump jumper, optional round		
Driveline Protection	Slip-clutch		
Options	Check chains, round stump jumper, dual tail wheel		



EXTRA DURABILITY AND HIGHER PERFORMANCE UNDER THE DECK, TOO!

- Rear baffle, standard on all models, concentrates the airflow and ensures cut material is distributed evenly.
- The large 1/2-inch by 4-inch blades and extra deep deck precisely cut large amounts of material.
- A beefier, heavy-duty crossbar and 1/4-inch steel stump jumper protect the undercarriage from extreme conditions.
- The frame is built with full-length 3-inch by 3-inch tubes and channels for extra durability.

WOODS' RC-SERIES SINGLE-SPINDLE IS IDEAL FOR GETTING THE MOST FROM YOUR COMPACT OR SUB-COMPACT TRACTOR. BUILT WITH HIGH-STRENGTH STEEL, WOODS CONFIDENTLY STANDS BEHIND THIS PRODUCT WITH OUR THREE-YEAR GEARBOX WARRANTY.

**TRACTOR PTO HP RANGE:
15 - 50 HP**

RC48.20 | 48-inch
RC60.20 | 60-inch
RC72.20 | 72-inch

- Three cutting widths to fit the size of your job and paint colors to match your tractor.
- Unique smooth, sloped decks are easy to clean and reduce build-up of water and debris.
- Stump jumpers are standard on all models for added driveline protection.
- High-strength steel and quality parts provide dependable service year-after-year.
- Three-year gearbox warranty is one of the best in the industry.

MODEL	RC48.20	RC60.20	RC72.20
Tractor PTO (HP)	15-40	20-50	
Hitch Category/Type	CAT 1 cantilevered		
Cutting Width (in)	48	57	69
Adjustable Cutting Height (in)	2-9		
Cutting Capacity (in)	1		
Gearbox Rating (HP)	50		
Blade Tip Speed (fpm)	13,100	13,620	14,340
Side Frame Depth (in)	7		
Approximate Weight (lbs)	410	494	575
Blade Dimensions (in)	.5 x 3		
Blade Carrier	Oval stump jumper		
Tailwheel (in)	4 x 16 laminated		
Driveline Protection	Shear-bolt or slip-clutch		
Driveline Holder	Yes, on deck		
Tractor PTO Speed (rpm)	540		
Quick-hitch Ready	Yes		
Cutting Area Shielding	Belt standard; chain shielding optional		
Warranty (cutter/gearbox)	1-year / 3-year		



CHOOSE YOUR COLOR!

Painted to match most tractor brands.




RC72.20

Shown with optional chain shielding

DURABLE AND EASY-TO-USE CUTTERS FOR BOTH BRUSH CUTTING AND CROP SHREDDING.

CV DRIVE

Less maintenance, smoother operation.

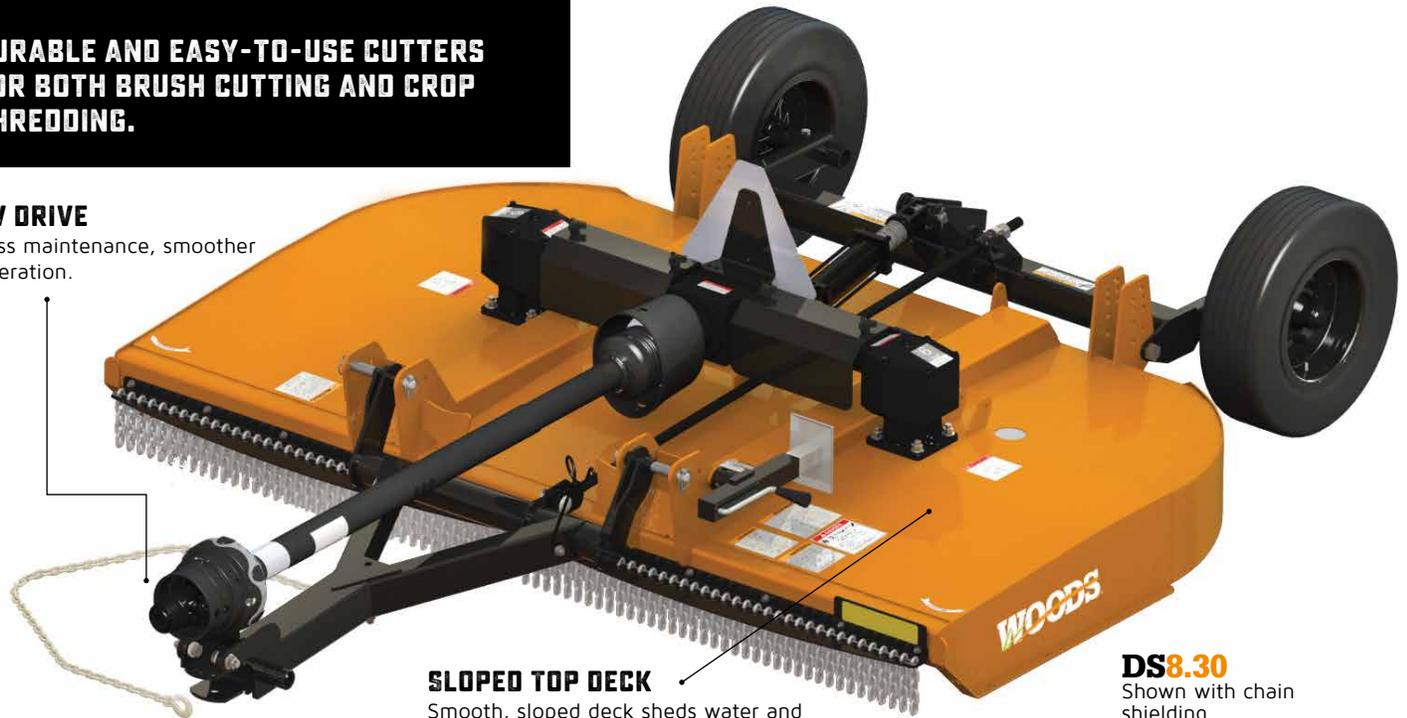

SLOPED TOP DECK

Smooth, sloped deck sheds water and debris to prevent rust and corrosion.

DS8.30

Shown with chain shielding

30- AND 40-SERIES DUAL-SPINDLE CUTTERS

TRACTOR PTO HP RANGE: 35 - 120 HP

DS8.30 | 96-inch, pull-type

MDS8.30 | 96-inch, 3-point mounted


DS10.40 | 120-inch, pull-type

MDS10.40 | 120-inch, 3-point mounted

- Cuts light brush up to 1.5 inches (30-series) to 2 inches (40-series) in diameter
- Six-year limited gearbox warranty

MODEL	DS8.30 (PULL-TYPE) MDS8.30 (3-POINT MOUNTED)	DS10.40 (PULL-TYPE) MDS10.40 (3-POINT MOUNTED)
Minimum Tractor PTO (HP)	35 pull-type 45 mounted	40 hp pull-type 60 hp mounted
Hitch Category/Type	Pull-type: pivoting clevis; mounted: CAT 1 or 2 /clevis	Pull-type: pivoting clevis; mounted: CAT 2 or 3 /clevis
Cutting Width (in)	96	120
Adjustable Cutting Height (in)	2-12	
Cutting Capacity (in)	1.5	2
Gearbox Rating (HP)	100 center / 75 spindles	120 center / 90 spindles
Blade Tip Speed (fpm)	15,200	16,700
Deck Side Depth (in)	10	
Deck Thickness (in)	.135	
Overall Width (in)	100.5	124.5
Overall Length (in)	Pull-type: 142 (25" tires) mounted: 96	Pull-type: 155 (25" tires) mounted: 106
Approximate Weight (lbs)	Pull-type: 1,440 mounted: 1,215	Pull-type: 1,820 mounted: 1,575
Blade Dimensions (in)	.5 x 4	
Wheel Selection	Laminated, severe duty new ag; foam filled new ag, 15 inch rims	
Quick-hitch Ready	Yes	
Gearbox Warranty	6-year limited	
Tractor PTO Speed (rpm)	540	
Driveline w/ Slip Clutch	Pull-type: CAT 4 CV Mounted: CAT 4	Pull-type: CAT 4 CV Mounted: CAT 5

DUAL-SPINDLE CUTTERS

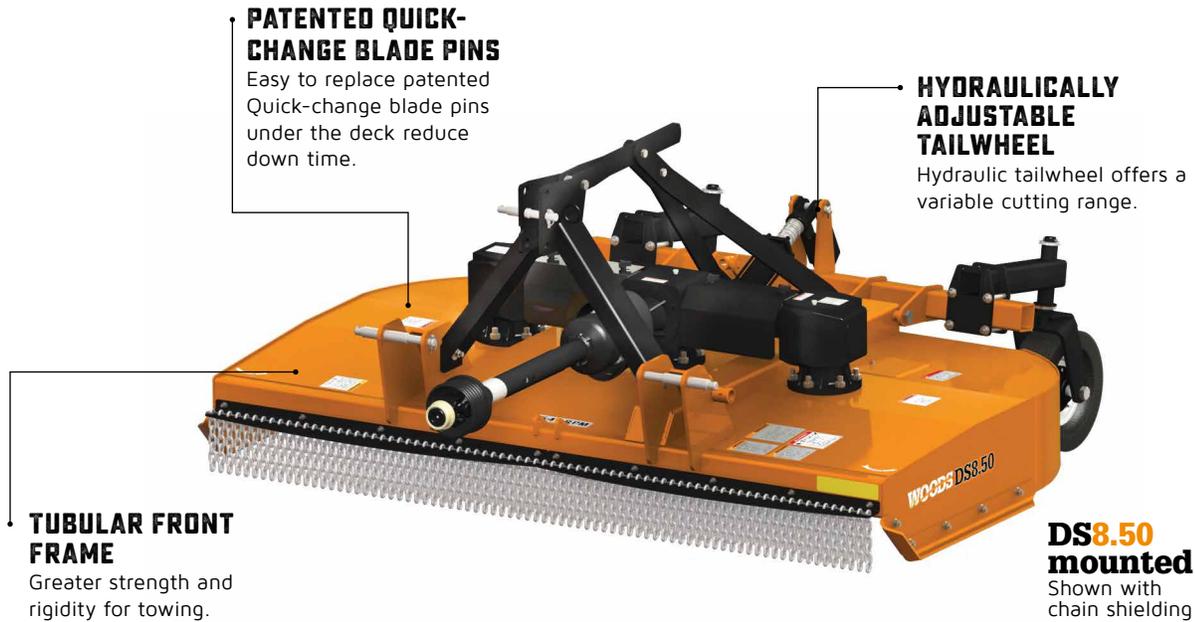

PATENTED QUICK-CHANGE BLADE PINS

Easy to replace patented Quick-change blade pins under the deck reduce down time.

HYDRAULICALLY ADJUSTABLE TAILWHEEL

Hydraulic tailwheel offers a variable cutting range.

TUBULAR FRONT FRAME

Greater strength and rigidity for towing.

DS8.50 mounted
Shown with chain shielding

50-SERIES DUAL-SPINDLE CUTTERS

TRACTOR PTO HP RANGE: 40 - 200 HP

- DS8.50** | 96-inch, pull-type
- MDS8.50** | 96-inch, 3-point mounted
- DS10.50** | 120-inch, pull-type
- MDS10.50** | 120-inch, 3-point mounted

- Cuts brush up to 3 inches in diameter
- Variable wheel spacing
- Our advanced gearbox seal technology, designed for harsh conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty – which includes the seals

MODEL	DS8.50 (PULL-TYPE) MDS8.50 (3-POINT MOUNTED)	DS10.50 (PULL-TYPE) MDS10.50 (3-POINT MOUNTED)
Minimum Tractor PTO (HP)	40 pull-type 55 mounted	50 pull, semi-mounted 65 mounted
Hitch Category/Type	Pull-type: pivoting clevis; mounted: CAT 2 or 3 /clevis	
Cutting Width (in)	96	120
Adjustable Cutting Height (in)	2-12	
Cutting Capacity (in)	3	
Gearbox Rating (HP)	205 center, 160 spindles	205 splitter, 160 spindles
Blade Tip Speed (fpm)	14,886 at 540 rpm 15,126 at 1,000 rpm (MDS only)	15,974 at 540 rpm 16,232 at 1,000 rpm (MDS only)
Deck Side Depth (in)	13	
Deck Thickness (in)	.135	
Overall Width (in)	103	127
Overall Length (in)	Pull-type: 150 (25 in. tires) mounted: 99	Pull-type: 162 (25 in. tires) mounted: 111
Approximate Weight (lbs)	Pull-type: 2,205 mounted: 2,055	Pull-type: 2,400 mounted: 2,255
Blade Dimensions (in)	.5 x 4	
Wheel Selection	Laminated, severe duty new ag; foam filled new ag, 15 inch rims, used aircraft; 16 inch laminated (mounted only)	
Optional Dual Wheels - Pull-Type	Yes	
Quick-hitch Ready	Yes	
Gearbox Warranty	6-year limited	
Tractor PTO Speed (rpm)	540 or 1,000	
Driveine w/Slip Clutch	Pull-type: CAT 6 CV; Mounted: CAT 5	

50-SERIES OFFSET DUAL-SPINDLE CUTTERS

TRACTOR PTO HP RANGE: 50 - 200 HP


DS08.50 | 96-inch, semi-mounted

DS010.50 | 120-inch, semi-mounted

WOODS RUGGED AND POWERFUL 50-SERIES OFFSET MODELS ARE IDEAL FOR ORCHARDS, TREE-LINED FIELDS AND ANY SETTING WITH OVERHANGS.

- Cuts brush up to 3 inches in diameter
- Variable wheel spacing
- DS08.50 Hydraulic variable offset 21 inches to the right or 5 inches left
- DS010.50 Hydraulic variable offset 27 inches to the right or 5 inches left
- Advanced gearbox seal technology, designed for harsh conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty – which includes the seals

HYDRAULIC VARIABLE OFFSET

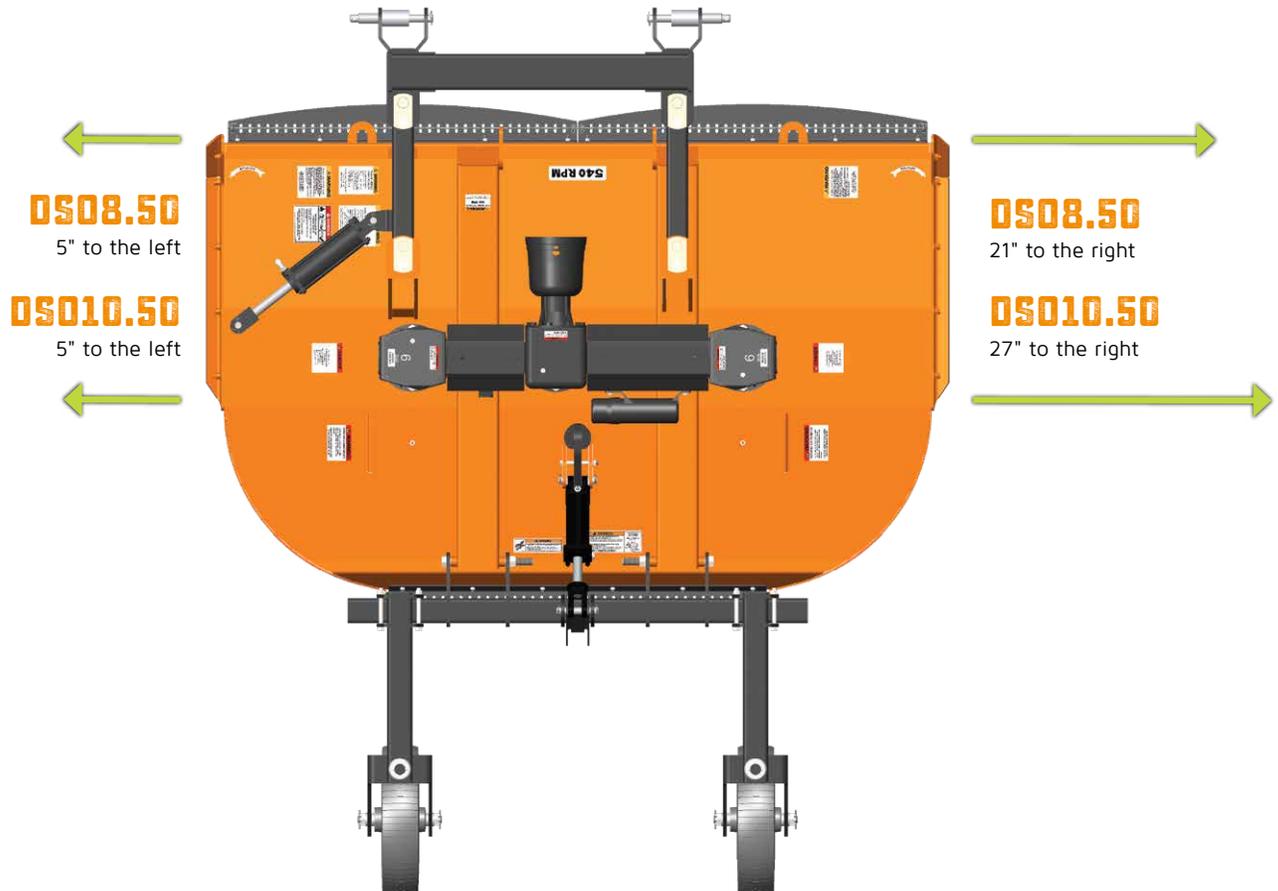



DSO8.50
Shown with
chain shielding

WOODS OFFSET MODELS REACH FAR UNDER CANOPIES ON EITHER SIDE OF THE TRACTOR.

MODEL	DSO8.50	DSO10.50
Minimum Tractor PTO (HP)	Semi-mounted: 40	Semi-mounted: 50
Hitch Category/Type	CAT 2 or CAT 3 / clevis	
Hydraulic Variable Offset (in)	21 to the right, 5 to the left	27 to the right, 5 to the left
Cutting Width (in)	96	120
Adjustable Cutting Height (in)	2-12	
Cutting Capacity (in)	3	
Gearbox Rating (HP)	205 center, 160 blade spindles	205 splitter; 160 blade spindles
Gearbox Warranty	6-year limited	
Blade Tip Speed (fpm)	14,886 at 540 rpm, 15,126 at 1,000 rpm	15,974 at 540 rpm, 16,232 at 1,000 rpm
Deck Side Depth (in)	13	
Deck Thickness (in)	.135	
Overall Width (in)	103	127
Overall Length (in)	Mounted: 122	Mounted: 128
Approximate Weight (lbs)	Mounted: 2,335	Mounted: 2,510
Blade Dimensions (in)	.5 x 4	
Wheel Selection (in)	21 laminated	
Quick-hitch Compatible	Yes	
Tractor PTO Speed (rpm)	540 or 1,000	
Driveline w/Slip Clutch	Mounted: CAT 5	

FINISH MOWERS

TURFKEEPER[®]



TK60.20
Shown with optional
chain shielding

TURFKEEPER
PRO[®]



TKP72.40
Shown with optional
chain shielding

TIME TO GET EVEN

EVEN CUT. EVEN DISTRIBUTION. EVEN COSTS LESS TO OWN.*

*Even Costs Less to Own is not substantiated in \$\$ but is implied by features such as Lubed-for -Life spindles (TK and TBW12.20), triple ball bearing serviceable spindles (TKP and TBW.40's), easy-off thumb screw belt shields, extended gearbox warranties (3-yr TK and 12.20; 6-yr TKP and TBW.40), easily replaceable idler pivots, durable construction and extensive testing.



3-YEAR GEARBOX WARRANTY

Confidence in the durability of your Woods mower.

EASY SHIELD REMOVAL

No tools needed to access belt sheaves, belt, spring-loaded idler.

DRIVELINE HOLDER

Keep the drive out of the dirt, even when attaching.



CAST IRON SHEAVES

Better belt grip for extended belt life.



SERVICEABLE BELT IDLER

Replaceable idler post and bronze bushing.



OPTIONAL FRONT ROLLER

Anti-scalp protection for uneven terrain.



1-YEAR SPINDLE WARRANTY

Lubed for life spindles with one year warranty provide ease of mind.

OPTIONAL CHAIN SHIELDING

Helps prevent discharge of foreign objects.

TK60.20

Shown with optional chain shielding

TRACTOR PTO HP RANGE: 15 - 35 HP

TK60.20 | 60-inch cutting width

TK72.20 | 72-inch cutting width

- High-lift blades for best in class lifting and cutting of green material for evenness of cut.
- Parallel frame deck sides spread material from edge to edge for even material distribution.
- High blade tip speeds enhance productivity with improved mowing at higher speeds for less time on the job.



• **NOTE:** All TurfKeeper™ finish mower models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

MODEL	TK60.20	TK72.20
Tractor PTO (HP)	15-35	20-35
Cutting Width (in)	60	72
Overall Width (in)	61	73
Operating Weight, w/chains (lbs)	481	538
Adjustable Cutting Height (in)	1.5 - 5	
Deck Material Thickness (in)	0.141	
Hitch	Limited CAT 1 & CAT 1	CAT 1
Lower Hitch	Cantilever	
Quick-hitch Compatible	Yes, factory ready	
Blade Tip Speed (fpm)	17,900	18,000
Blade Overlap (in)	1.25	
Blade Spindles/Bearings	Cast iron housings / Lubed-for-Life	
Driveline Category	CAT 3	
Belt	B-section Aramid	
Belt Adjustment	Spring-loaded idler	
Gearbox Rating (HP)	35	
Tractor PTO Speed (rpm)	540	
Caster Wheels (in)	3.5 x 8.0 solid rubber	
Gearbox Warranty (limited)	3-year homeowners or 1-year commercial, including seals	
Mower Warranty	1-year residential or 90 days commercial	
Cutting Area Chain Shielding	Optional	

TRACTOR PTO HP RANGE: 15 - 50 HP

- TKP60.40** | 60-inch cutting width
- TKP72.40** | 72-inch cutting width
- TKP84.40** | 84-inch cutting width

- Heavy duty construction provides maximum durability.
- Strong, 7 gauge steel deck and a powerful 60 hp gearbox.
- Uniquely designed for best-in-class cut quality.
- Floating lower hitch helps to follow ground contours for a smooth, even cut.

- Easy shield removal-no tools necessary.
- Deep deck and high blade tip speeds help you get the job done faster.
- Ideal for mowing large lawns, sports fields and parks.
- Superior baffle design distributes material more evenly.



DRIVELINE HOLDER

Keep the drive out of the dirt, even when attaching.


EASE OF ATTACHMENT

Quick-hitch ready from the factory for ease of attachment.



6-YEAR GEARBOX WARRANTY

Confidence in the durability of your Woods mower.

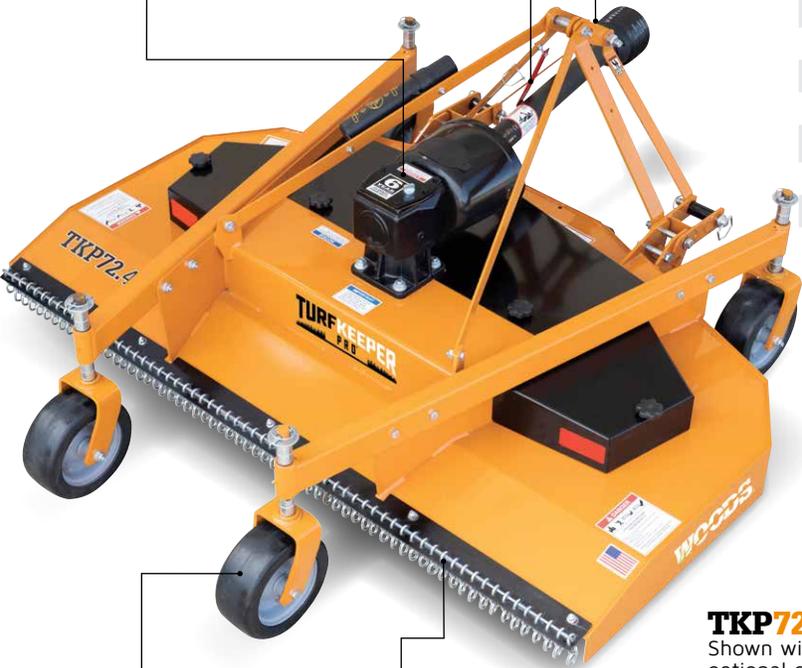

DURABILITY

Premium, solid rubber caster wheels for performance and durability.

OPTIONAL CHAIN SHIELDING

Helps prevent discharge of foreign objects.

TKP72.40

Shown with optional chain shielding

MODEL	TKP60.40	TKP72.40	TKP84.40
Tractor PTO (HP)	15-50	20-50	25-50
Cutting Width (in)	60	72	84
Overall Width (in)	61	73	85
Operating Weight, w/chain (lbs)	636	709	817
Adjustable Cutting Height (in)	1.5 - 5.0		
Deck Material Thickness (in)	0.188		
Hitch	CAT 1 & Ltd CAT 1	CAT 1	
Lower Hitch	Floating, Clevis		
Quick-hitch Compatible	Yes, factory ready		
Blade Tip Speed (fpm)	18,000	18,100	
Blade Overlap (in)	1.5		
Blade Spindles / Bearings	Ductile iron housings / triple ball bearings, greasable		
Driveline Category	CAT 3		
Belt	B-section Aramid		
Belt Adjustment	Spring-loaded w/ bearing pivot		
Gearbox Rating (HP)	60		
Tractor PTO Speed (rpm)	540		
Caster Wheels (in)	4 x 10 solid rubber		
Gearbox Warranty (limited)	6-year, including seals		
Mower Warranty	1-year		
Cutting Area Chain Shielding	Optional		



CAST-IRON SHEAVES
Better belt grip for extended belt life.



SPRING-LOADED BELT TENSIONER
Replaceable ball bearing pivot for smooth operation.



OPTIONAL FRONT ROLLER
Anti-scalp protection for uneven terrain.



SIX-YEAR GEARBOX WARRANTY


With twice the oil capacity of many competitors and an improved breather system that maintains oil lubrication of gears, RD990X gearboxes carry a 6-year limited warranty to ensure years of worry-free performance.

TAPERED ROLLER BEARINGS

Tapered roller bearings in caster wheels provide superior performance and longevity in rough conditions.

RD990X

Shown with standard chain shielding

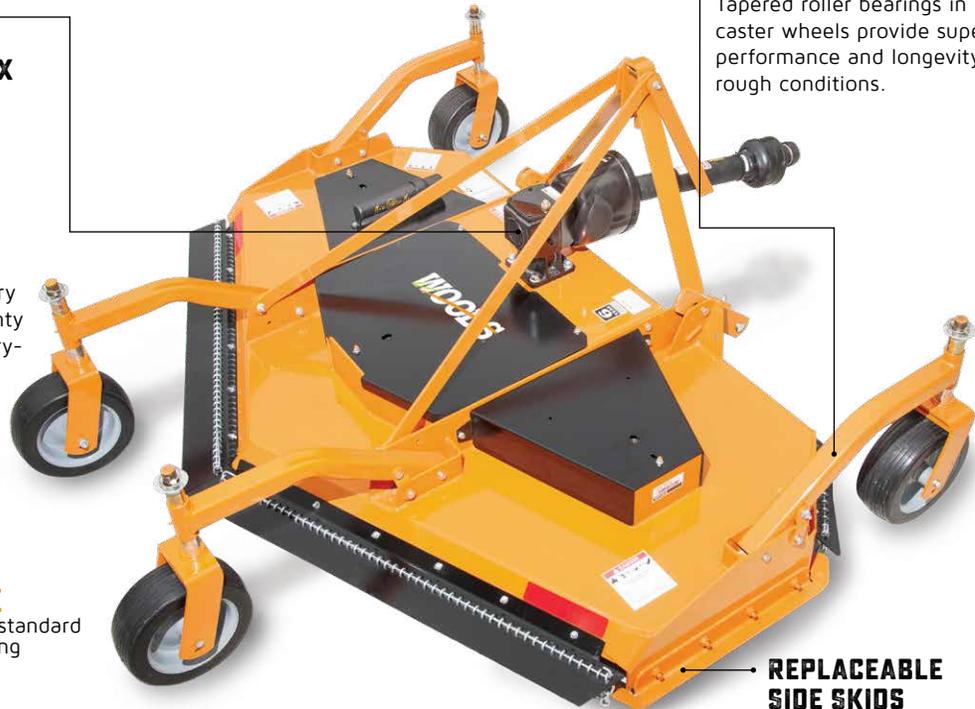

REPLACEABLE SIDE SKIDS

Replaceable side skids attach to heavy side frames for durability and long life.

MODEL	RD990X
Tractor PTO (HP)	45-75
Hitch/Quick-hitch Ready	CAT 1 & CAT 2 / yes
Cutting Width (in)	90
Weight (lbs)	1,200
Adjustable Cutting Height (in)	1.5-7
Overall Width (in)	97
Deck Material Thickness (in)	.188
Side Skirt (in)	.31 x 8.5 with skid shoes
Gearbox Rating (HP)	75
Blade Tip Speed (fpm)	17,000
Blade Overlap (in)	2
Blade Spindles/Bearings	3 cast iron housings / greasable tapered roller bearings
Tractor PTO Speed (rpm)	540
Driveline Size	CAT 4
Belt	Powerband w/double B-section
Belt Adjustment	Spring-loaded idler
Cutting Area Chain Shielding	Standard
Mower Warranty	1-year
Gearbox Warranty (limited)	6-year
Spindle Warranty (limited)	3-year

TRACTOR PTO HP RANGE: 45 - 75 HP

RD990X | 90-inch cutting width

The Woods RD990X rear-mount finish mower is tough yet versatile enough to move from rough, weedy farmland to commercial lawns and landscapes.

- Three-point hitch: CAT 1 and CAT 2.
- Blade tip speed: 17,000 fpm.
- Takes down grass and light weeds, and leaves a high grade finish cut behind.
- Features a patented Quick-change blade system, an extra strong double B-section belt, and anti-wrap bars that prevent damage caused by material wrapped around lower spindle.
- Deep deck and stump jumper blade carrier with free-swinging blades ideal for rough grass.
- Floating lower hitch points allow the mower to follow uneven terrain.
- Chain shielding standard.

TURF BATWING®

ESTATE MODEL

TRACTOR PTO HP RANGE: 25 - 60 HP

TBW12.20 | 12-foot cutting width

- High-lift blades for best-in-class lifting and cutting of green material for evenness of cut.
- Parallel deck side frames spread material from edge to edge for even material distribution.
- High blade tip speeds enhance productivity with improved mowing at higher speeds for less time on the job.

SPECIFICATIONS	TBW12.20
Tractor PTO HP	25-60
Shipping Weight (lbs)	2005
Hitch	CAT 2 drawbar
Cut Width (in)	144
Cut Height (in)	1.5 - 5.0
Overall Width (in)	147
Max. Overall Length (in)	141
Transport Tongue Wt. (lbs)	384
Transport Width (in)	91
Transport Length (in)	135
Transport Height (in)	71.5
Splitter Gearbox HP	100
Deck Gearbox HP	30
Blade Tip Speed Center Deck/Wing Decks (fpm)	17,900 / 18,200
Drive Type	Gearbox over v-belt
Input Driveline	CAT 3 (CV)
Wing Driveline	CAT 3
Transport Tires (in)	(2) 20.5 x 8-10
Caster Wheels (in)	(10) 8 x 3.5 solid
Trailer Frame Construction	4.0 x 4.0 x .25 sq tube
Deck Thickness (in)	.141
Blade Spindles	(9) ductile iron, lubed-for-life
Blade Dimensions (in)	(6) .25 x 2.5 x 17.0, (3) .25 x 2.5 x 20.8
Hydraulic Remotes Required	1
Center Deck Lift Cylinders	3.0 x 8 single-acting
Deck Overlap (in)	6.0
Hitch Adjustment	Floating clevis, multi-position
Tractor PTO Speed (rpm)	540
Center Deck Cut Width (in)	60
Wing Deck Cut Width (in)	48
Wing Deck Lift Cylinders	3.0 x 10 single-acting

WOODS LATEST INNOVATIVE PRECISION CUTTING TECHNOLOGY BEAUTIFIES YOUR LAWN IN LESS TIME, LEAVING THAT WELL-MANICURED LOOK.



1-YEAR SPINDLE WARRANTY
Ductile iron blade spindles are lubed-for-life.



CAST-IRON SHEAVES
Better belt grip for extended belt life.



SPRING-LOADED BELT TENSIONER
Replaceable idler post and bronze bushing.

TRANSPORT LOCK QUICK RELEASE

Easily pull the rope to release transport lock.

HYDRAULIC CYLINDERS

Rugged, single-acting hydraulic cylinders fold the mower for transport.



3-YEAR GEARBOX WARRANTY

Confidence in the durability of your Woods mower.

OPTIONAL FRONT AND REAR ROLLERS

Anti-scalp protection for uneven terrain.

EASY SHIELD REMOVAL

No tools needed to access belt sheaves, belt or spring-loaded idler.

OPTIONAL CHAIN SHIELDING

Added protection to further reduce the risk of thrown objects.

TBW12.20
Shown with optional chain shielding, front and rear anti-scalping rollers and light kit.



TURF BATWING®

COMMERCIAL MODELS
TRACTOR PTO HP RANGE: 30 - 80 HP

TBW12.40 | 12-foot cutting width

TBW15.40 | 15-foot cutting width

TBW17.40 | 17-foot cutting width

With its unique deck design and heavy duty steel construction, the new commercial Turf Batwing® finish mower line combines unsurpassed cut quality and extreme durability. This rugged workhorse is capable of withstanding 2,000 hours of continuous runtime and features premium caster wheels to tackle uneven terrain. What's more, its unique high-lift blades and baffling design produce unrivaled cut quality*, making it the best choice when you mean business on your job.



TBW15.40
Shown with optional chain shielding, front and rear anti-scalping rollers and light kit.



6-YEAR GEARBOX WARRANTY
The industry's most comprehensive warranty covers both the gearbox and seals.



3-YEAR SPINDLE WARRANTY
Ductile iron blade spindles with triple ball bearings.



MORE EVEN CUT
Unique baffling and blade design lifts grass more efficiently for a better cut.



HANDLE RUGGED TERRAIN
Repositioned, extra-large castor wheels better handle rugged terrain.



WIDER DISCHARGE AREA
Wider discharge area allows clippings to flow through effortlessly, without clogging.



IMPROVED BELT DRIVE DESIGN
Handles more horsepower than ever before to maintain superior cut quality at higher speeds.



EASY SHIELD REMOVAL
No tools needed to access belt sheaves, belt and spring-loaded idler.



OPTIONAL FRONT AND REAR ROLLERS
Anti-scalp protection for uneven terrain.



OPTIONAL CHAIN SHIELDING
Helps prevent discharge of foreign objects.

SPECIFICATIONS	TBW12.40	TBW15.40	TBW17.40
Tractor PTO (hp)	30-80	35-80	40-80
Hitch	CAT 1, Drawbar	CAT 2, Drawbar	
Shipping Weight	2,819	3,454	3,569
Hitch Adjustment	Floating Clevis, Multi-position		
Cut Width (in)	144	180	204
Cut Height (in)	1.5 - 5.5		
Wing Deck Cut Width (in)	48	60	72
Center Deck Cut Width (in)	60	72	72
Deck Overlap (in)	6.0		
Overall Width (in)	145	183	205
Transport Width (in)	88	97	101
Max. Overall Length (in)	171	182	
Transport Tongue Wt. (lbs)	688	754	794
Transport Length (in)	167	176	
Transport Height (in)	74	83.6	90.7
Splitter Gearbox (hp)	100		
Deck Gearbox HP	60	75	
Blade Tip Speed (fpm)	18,000	18,100	
Drive Type	Gearbox over v-belt		
Input Driveline	CAT 4 CV (const. vel.)		
Wing Drivelines	CAT 3		
Transport Tires [in]	(2) 20.5 x 8-10		
Caster Wheels (in)	(10) 15 x 6-6 pneumatic	(10) 18 x 9.5-8 pneumatic	
Trailer Frame Construction (in)	4.0 x 4.0 x .25 sq tube		
Deck Thickness (in)	.188		
Blade Spindles	(7) ductile iron	(9) ductile iron	
Blade Spindle Bearings	Triple ball bearings		
Blade Dimensions (in)	(4) .25 x 2.5 x 17 (3) .25 x 2.5 x 21	(6) .25 x 2.5 x 21 (3) .25 x 2.5 x 25	(9) .25 x 2.5 x 25
Hydraulic Remotes Required	1		
Tractor PTO Speed (rpm)	540		



*The new commercial Turf Batwing® finish mower was tested to withstand 2,000 hours of continuous runtime and features premium castor wheels to tackle uneven terrain. Its unique high-lift blades and baffling design produce unrivaled cut quality. In fact, the TBW includes the cutting technology from the #1 rated TurfKeeper Pro®, rated best in cut quality in independent testing.

SEEDERS



CSS60

THERE'S NOTHING LIKE THE SMELL OF FRESH TURNED DIRT AND THE HOPE OF NEWLY PLANTED SEEDS.

Woods seeders give you the flexibility to handle primary seeding, over-seeding, and can even plant up to three types of seed in one pass. You choose the combination of seed boxes that fits your application. That means efficient, one-pass planting that maximizes efficiency and productivity.

Woods offers three types of seeders - the Food Plot Seeder, Precision Super Seeder, and the Compact Super Seeder. Our seeders are designed for tractors ranging from 15 to 125 HP and come in 48 to 84 inch widths.

**GOOD THINGS...
PRECISION
METERING,
MANEUVERABILITY,
VERSATILITY,
PRODUCTIVITY,
DURABILITY...
COME IN COMPACT
PACKAGES
FROM WOODS.**

Ideal for small-scale planting, such as food plots, lawns, gardens, wildflower meadows, waterways and roadways. Widths 48 or 60 inches and lighter weight so you can maneuver into formerly unreachable areas.

**ADDITIONAL FEATURES
STANDARD ON BOTH
MODELS**

- The calibration system includes seed charts, a calibration tray and crank for accurate seed rates. **WOODS EXCLUSIVE**
- Windowed seed cups and clear PVC tubes allow you to easily monitor the flow of seeds.
- A quick and easy disconnect – pull a pin and one or both seed boxes stop to make it a tilling tool for preparing the ground. Till your seed bed, then replace the pin and engage the seeding function for a final pass. **WOODS EXCLUSIVE**

PRECISION METERING

Precisely measure out seeds, reducing waste, plus enjoy the durability of metal (not plastic) meters.



MANEUVERABILITY

Easily weave into narrow spaces and make tight turns to plant areas that may not be accessible with a larger tractor and planter.



VERSATILITY

Handle a wide range of seeds from Black-eyed Susans to corn. See our planting guide.

CSS60

PRODUCTIVITY

Simultaneously plant two seed types at two different depths in one pass.

WOODS EXCLUSIVE

DURABILITY

Expect years of work from a rugged, Grade 80 steel body.

COMPACT SUPER SEEDERS

The Woods Compact Super Seeder is everything you need in one compact cultivation and planting package. In one pass, you can prepare the seed bed, precisely drop seeds at two different depths, then firm the bed for improved germination.

Woods' superior design enables you to maneuver into tight spaces and reach once unreachable places. Go ahead, plant a little food plot in the woods. You can do it with the Woods Compact Super Seeders.




CSS48

CHOOSE THE FEATURES THAT FIT YOUR PROJECT

Every model starts with a spiked drive roller and a cool season seed box. Then, choose the front tool that will prepare your seed bed.

**WOODS
EXCLUSIVE**

CHOOSE ONE OF THESE OPTIONS TO IMPROVE YOUR PRODUCTIVITY AND VERSATILITY:



Spiked roller with adjustable angles that will penetrate thatch and aerate lawns. Or, angle it to break up the surface and remove stands of turf.

OR



Adjustable disc blades that will cut into and work the soil. Easily adjust the blade angles to till more aggressively depending upon soil conditions.

PLUS ANY OR ALL OF THESE:

- + Add a legume seed box and now you can plant two seeds at different depths in one pass.
- + Mud scrapers help keep blades free from dirt clods, mud and clay.
- + An electric tow kit for ATVs and UTVs for tractors that make it easy to transport.

PLUS, A FAST/SLOW CHAIN DRIVE, ROAD LIGHTS, SEED STOP PLATES - THE OPTIONS OFFER YOU NEARLY ENDLESS WAYS TO CUSTOMIZE YOUR WOODS COMPACT SUPER SEEDER.

REACH ONCE UNREACHABLE PLOTS

If you prefer to work the land on an ATV or UTV instead of a tractor, the Woods Compact Super Seeder is your machine. Full-featured like our larger seeders, with the same rugged steel body and parts — yet, lightweight so that you can easily lift, tow, till and sow with an ATV or UTV.

TOW KIT

Make your seeder easy to transport with an optional tow kit. You won't even need to leave your seat to raise and lower the seeder.

- Available models include an electric tow kit for ATVs and UTVs.
- Available for PSS and CSS models.

TRACTOR HP RANGE: 15 - 45 HP

CSS48 | 48-inch

CSS60 | 60-inch

- Three-point hitch: CAT 1/Limited CAT 1
- Working width 48 - 60 inches
- ATV/UTV minimum 350 - 400cc



CSS60

MODEL	CSS48	CSS60
Tractor Engine (HP)	15-35	20-45
Tractor Hitch	CAT 1/Limited CAT 1	
ATV/UTV Engine Size (cc)	Minimum 350	Minimum 400
Working Width (in)	48	60
Overall Width	57	69
Weight with Seed, Depending upon Configuration (lbs)	395-679	487-810
Drive Type	Ground-driven spiked roller	
Number of Seed Boxes Available	1 or 2	
Seed Metering	6 seed cups	8 seed cups
Seed Box Ratio	5.1:1 or 14.4:1	5.1:1 or 14.4:1
Cool Season Seed Box with Agitator	Standard	
Cool Season Seed Box Capacity (bushel)	1.00	1.25
Legume Seed Box	Optional	
Legume Seed Box Capacity (bushel)	1.00	1.25
Front Tool Choices	6 - 16" notched disc blade or spiked roller	8 - 16" notched disc blade or spiked roller
Calibration Tray	Standard	
Crank Handle	Standard	
Spring-loaded Trailing Cultipacker	Optional	
Speed Ranges	Turf seed range 0-700 lbs/acre (cool season); food plot range 0-30 lbs/acre (legume)	
Options	Fast/slow chain drive, quick-hitch bushings, mud scrapers, seed stop plates, highway lights, tow kit	
ASABE Quick Hitch	Add hitch pin bushings to make CAT 1 quick-hitch ready	

Plant up to three types of seed in one pass. Ideal for hunters and small acreage farmers seeding legumes and larger seeds.

- Three seed box choices — one cool season and two legume — can plant a variety of seeds like alfalfa, clover, corn, sorghum, soybeans, turnips and wheat.
- A trailing cultipacker firms the seed bed for perfect seed-to-soil contact that's ready to trap moisture for germination.
- Plant cool season seeds in rows at a deeper depth while evenly broadcasting up to two types of legume seeds at a shallow depth — all in one pass.

FPS72

Shown with optional mud scrapers, legume seed boxes and cultipacker



TRACTOR HP RANGE: 25 - 125 HP

FPS48 | 49-inch

FPS60 | 60-inch

FPS72 | 72-inch

FPS84 | 84-inch

- Three-point hitch:
CAT 1 & CAT 2
- Working widths from
48-84 inches

MODEL	FPS48	FPS60	FPS72	FPS84
Tractor Engine (HP)	25-45	30-65	35-85	40-125
Tractor Hitch	CAT 1 & CAT 2			CAT 2
Working Width (in)	49	60	72	84
Weight — Standard Configuration ¹ (lbs)	821	899	1,196	1,320
Weight — Fully Configured ² (lbs)	1,084	1,222	1,578	1,762
Drive Type	Ground			
Number of Seed Boxes Available	3			
Seed Box Ratio	1-speed			
Seed Cups (7" spacing)	7	8	10	12
Row Units	Standard			
Cool Season Seed Box Capacity (bushel)	4.00	5.00	6.00	7.00
Legume Seed Box Capacity (bushel)	1.00	1.25	1.50	1.75
Disc Blades	(8) 16" notched		(10) 18" notched	
Cast Iron or Nylon Trailing Cultipacker	Optional (9.5" diameter cast iron or 11" diameter nylon)			
Calibration Tray & Crank Handle	Standard			
Mud Scrapers & Frame Platform	Optional			
ASABE Quick-hitch Ready	Yes			

¹ Includes spiked drive roller, disc blades, cool season seed box, and row units.

² Includes cultipacker drive roller, disc blades, cool season seed box, row units, 1st and 2nd legume seed boxes, and nylon trailing cultipacker.



The Precision Super Seeder gives you the flexibility to handle primary seeding, over-seeding, and applications such as native grasses and food plots. It's the most versatile seed box combination on the market.

- Three seed box options — cool season, warm season, and legume — let you plant anything from rye and oats to prairie grasses, wild flowers, radishes and soybeans.
- Efficient, one-pass planting of up to two seed types at one depth and legume seeds at a different depth — with models equipped with three seed boxes.
- All seed boxes can be engaged and disengaged independently with a single lynch pin — no tools required.

TRACTOR HP RANGE: 25 - 125 HP

PSS48 | 49-inch

PSS60 | 60-inch

PSS72 | 72-inch

PSS84 | 84-inch

- Three-point hitch: CAT 1 & CAT 2
- Working widths from 48–84 inches

MODEL	PSS48	PSS60	PSS72	PSS84
Tractor Engine (HP)	25-45	30-65	35-85	40-125
Tractor Hitch	CAT 1 & CAT 2			CAT 2
Working Width (in)	49	60	72	84
Weight — Standard Configuration ¹ (lbs)	779	861	1,132	1,249
Weight — Hunting Edition Configuration ² (lbs)	1,044	1,222	1,565	1,761
Drive Type	Ground			
Number of Seed Boxes Available	3			
Seed Metering	Fluted and picker wheel			
Seed Cups (7" spacing)	7	8	10	12
Cool Season Seed Box Capacity (bushel)	4.00	5.00	6.00	7.00
Native Warm Season Seed Box Capacity (bushel)	5.00	6.25	7.50	8.75
Legume Seed Box Capacity (bushel)	1.00	1.25	1.50	1.75
Front Roller Spikes	(128) .5" x 1.75" carbide steel	(160) .5" x 1.75" carbide steel	(192) .5" x 1.75" carbide steel	(224) .5" x 1.75" carbide steel
ASABE Quick-hitch Ready	Yes			

¹ Standard configuration consists of frame with spiked drive roller, adjustable front spiked rollers and cool season seed box

² Hunting Edition configuration consists of frame with spiked, ground drive roller, adjustable front disc blades, cool season seed box, legume seed box and cast iron cultipacker

WHAT CAN WOODS SEEDERS PLANT? HERE IS A PARTIAL LIST...

COOL SEASON GRASS AND CEREAL GRAINS (LARGE SEEDS)

Annual Ryegrass
Barley
Buckwheat
Buffalo Grass
Chufa
Corn (small rounds)
Fescue
Kentucky Bluegrass Blends
Kidney Beans
Lablab
Lima Beans
Oats
Orchardgrass
Peas
Perennial Ryegrass
Snow Peas
Sorghum
Soybeans
Sudan
Sugar Beets
Sunflower
Triticale
Wheat

LEGUME BOX (SMALL SEEDS)

Alfalfa
Bahai
Bermuda
Birdsfoot Trefoil
Black-eyed Susan
Brassica
Brown Top Millet
Carpet Grass
Centipede
Chicory
Clover
Fescue
Forbes
Green Sprangletop/Kale
Kentucky Bluegrass
Kleingrass
Plains Bristlegrass
Radish
Rape
Side Oats Grama
Sudan
Sugar Beets
Switchgrass
Timothy
Turnip
Zoysia

NATIVE WARM SEASON GRASS BOX (FLUFFY, LIGHT- WEIGHT SEEDS)*

Big Bluestem
Brome
Canadian Wild Rye
Indian Grass
Little Bluestem
Sideoats Grama



*Precision Super Seeder only

GROUNDBREAKER® BACKHOES



35 YEARS OF BACKHOE INNOVATION

We believe in heavily researching what customers think about the equipment they use and what they need – really need – before we ever start designing. And, given the depth and breadth of experience at Woods, we agree with Ron that a superior product is simply inevitable.


Industry experts agree. The Groundbreaker® BH100 backhoe won the 2020 ASABE award for outstanding innovation in engineering and technology.

BH100
Shown with
optional
thumb

CHOOSE YOUR COLOR!

Available in black or painted to match most tractor brands



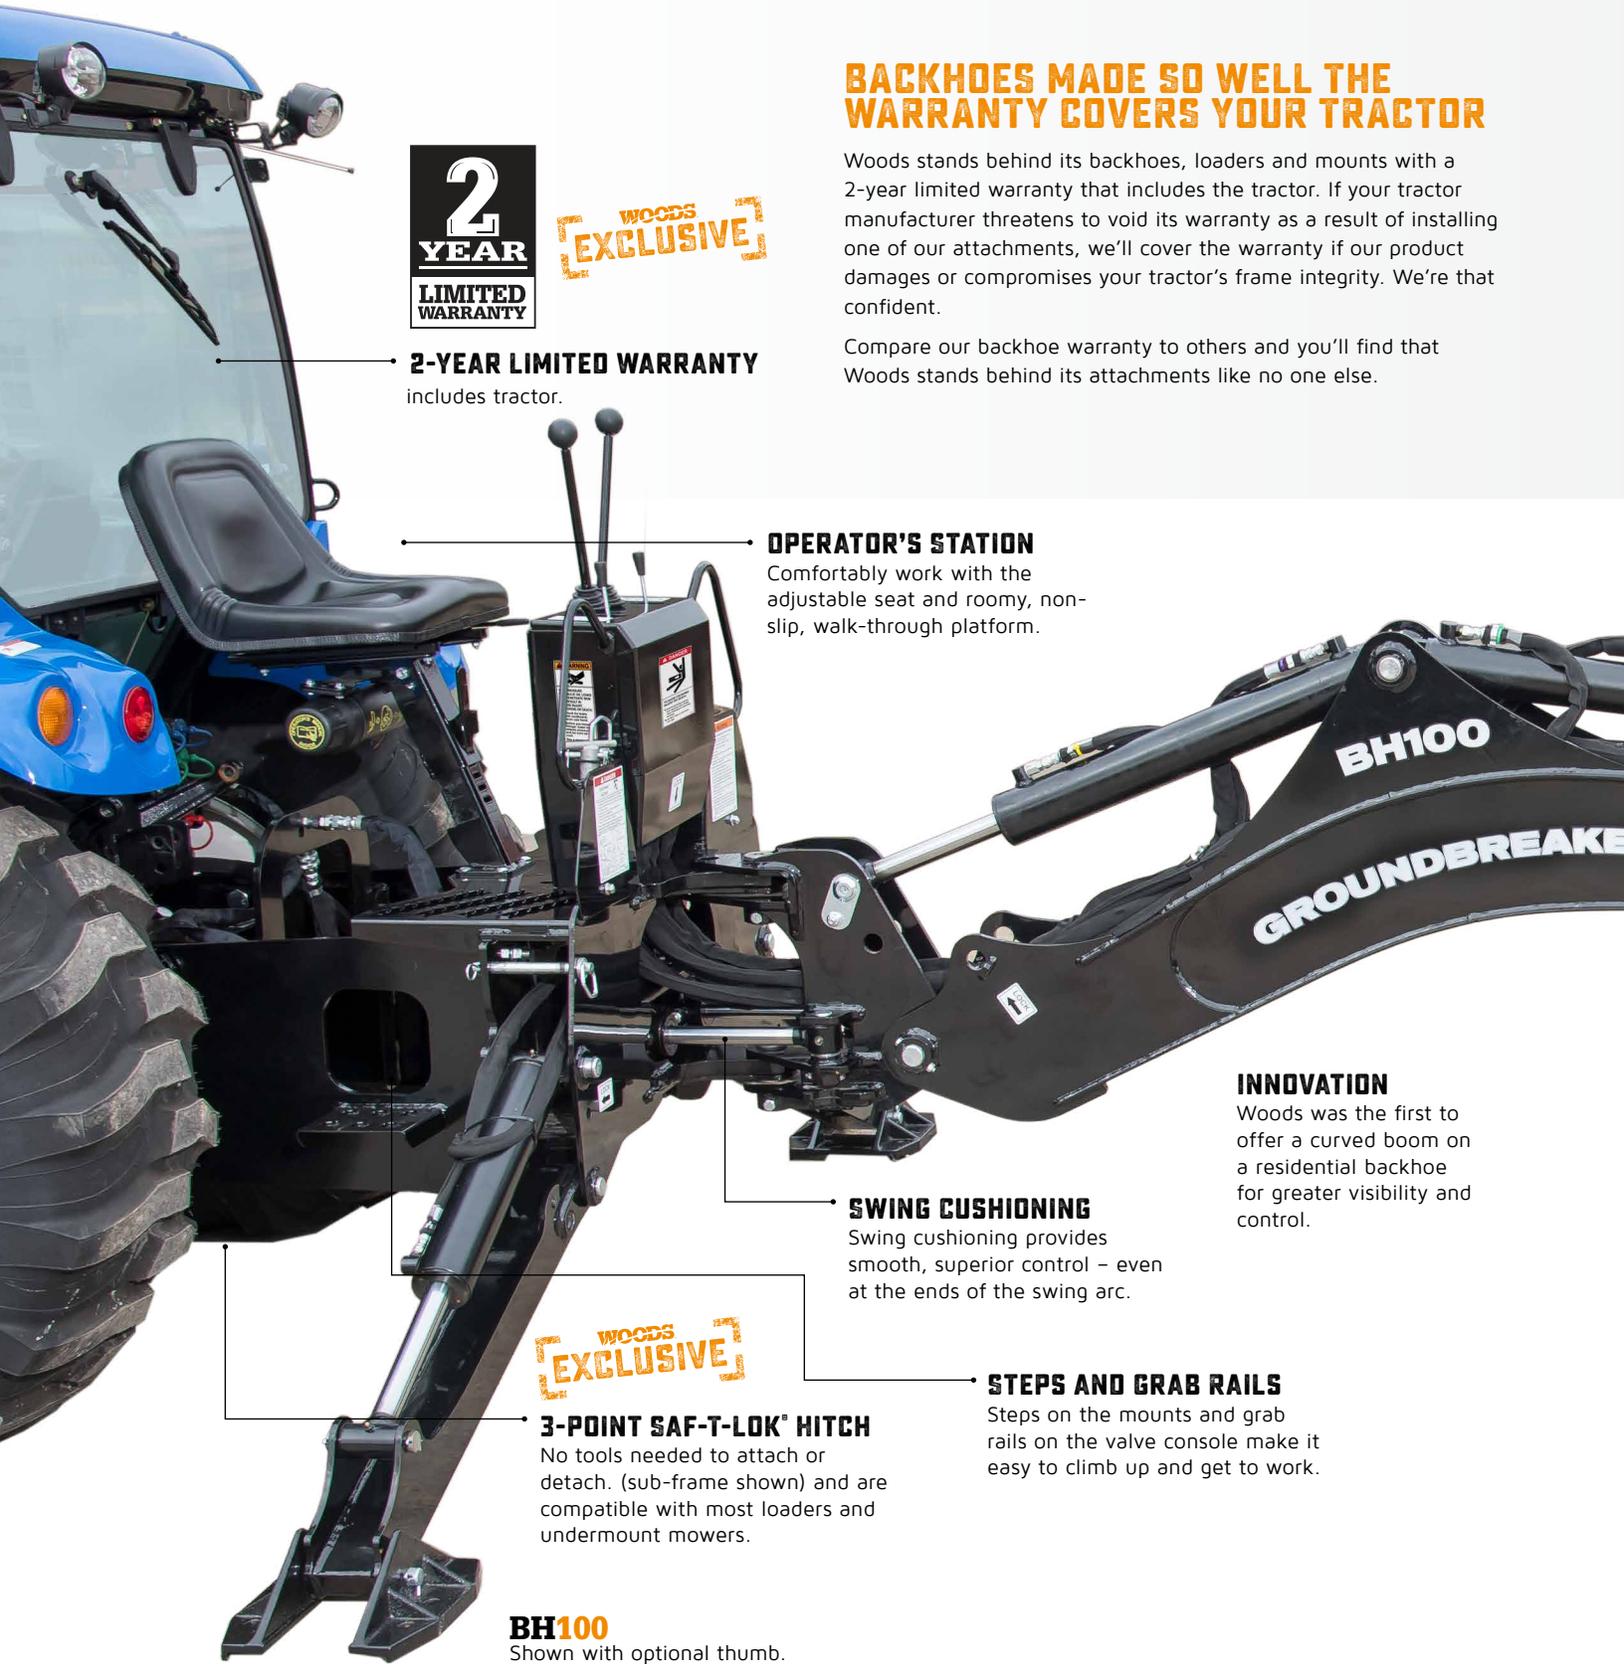

2
YEAR
LIMITED
WARRANTY

WOODS
EXCLUSIVE

2-YEAR LIMITED WARRANTY
includes tractor.

BACKHOES MADE SO WELL THE WARRANTY COVERS YOUR TRACTOR

Woods stands behind its backhoes, loaders and mounts with a 2-year limited warranty that includes the tractor. If your tractor manufacturer threatens to void its warranty as a result of installing one of our attachments, we'll cover the warranty if our product damages or compromises your tractor's frame integrity. We're that confident.

Compare our backhoe warranty to others and you'll find that Woods stands behind its attachments like no one else.

OPERATOR'S STATION

Comfortably work with the adjustable seat and roomy, non-slip, walk-through platform.

INNOVATION

Woods was the first to offer a curved boom on a residential backhoe for greater visibility and control.

SWING CUSHIONING

Swing cushioning provides smooth, superior control – even at the ends of the swing arc.

WOODS
EXCLUSIVE

3-POINT SAF-T-LOK® HITCH

No tools needed to attach or detach. (sub-frame shown) and are compatible with most loaders and undermount mowers.

STEPS AND GRAB RAILS

Steps on the mounts and grab rails on the valve console make it easy to climb up and get to work.

BH100

Shown with optional thumb.
See page 59 for full specs.

UNMATCHED PERFORMANCE


Combine an excavator style curved boom (first offered by Woods on a compact tractor model) with other Woods innovations like a unique easy-on/easy-off mounting system, serrated edges, and construction-grade buckets, and you've got the best built backhoe in the industry.

Groundbreaker® backhoes are powerful diggers that are simple to service, require no tools to attach and detach, and offer greater bucket capacity than any other bucket in its class.

DURABLE CONSTRUCTION

Woods' reputation for premium quality products extends to our line of backhoes. Welded to American Welding Society standards and tested in rigorous real-life conditions, our backhoes are built to handle your most challenging jobs.

- Heavy-duty cylinders endure greater force and last longer.
- Easy to service hoses and pins make maintenance a breeze.
- Greasable end pins are simple to maintain and extend the work life.

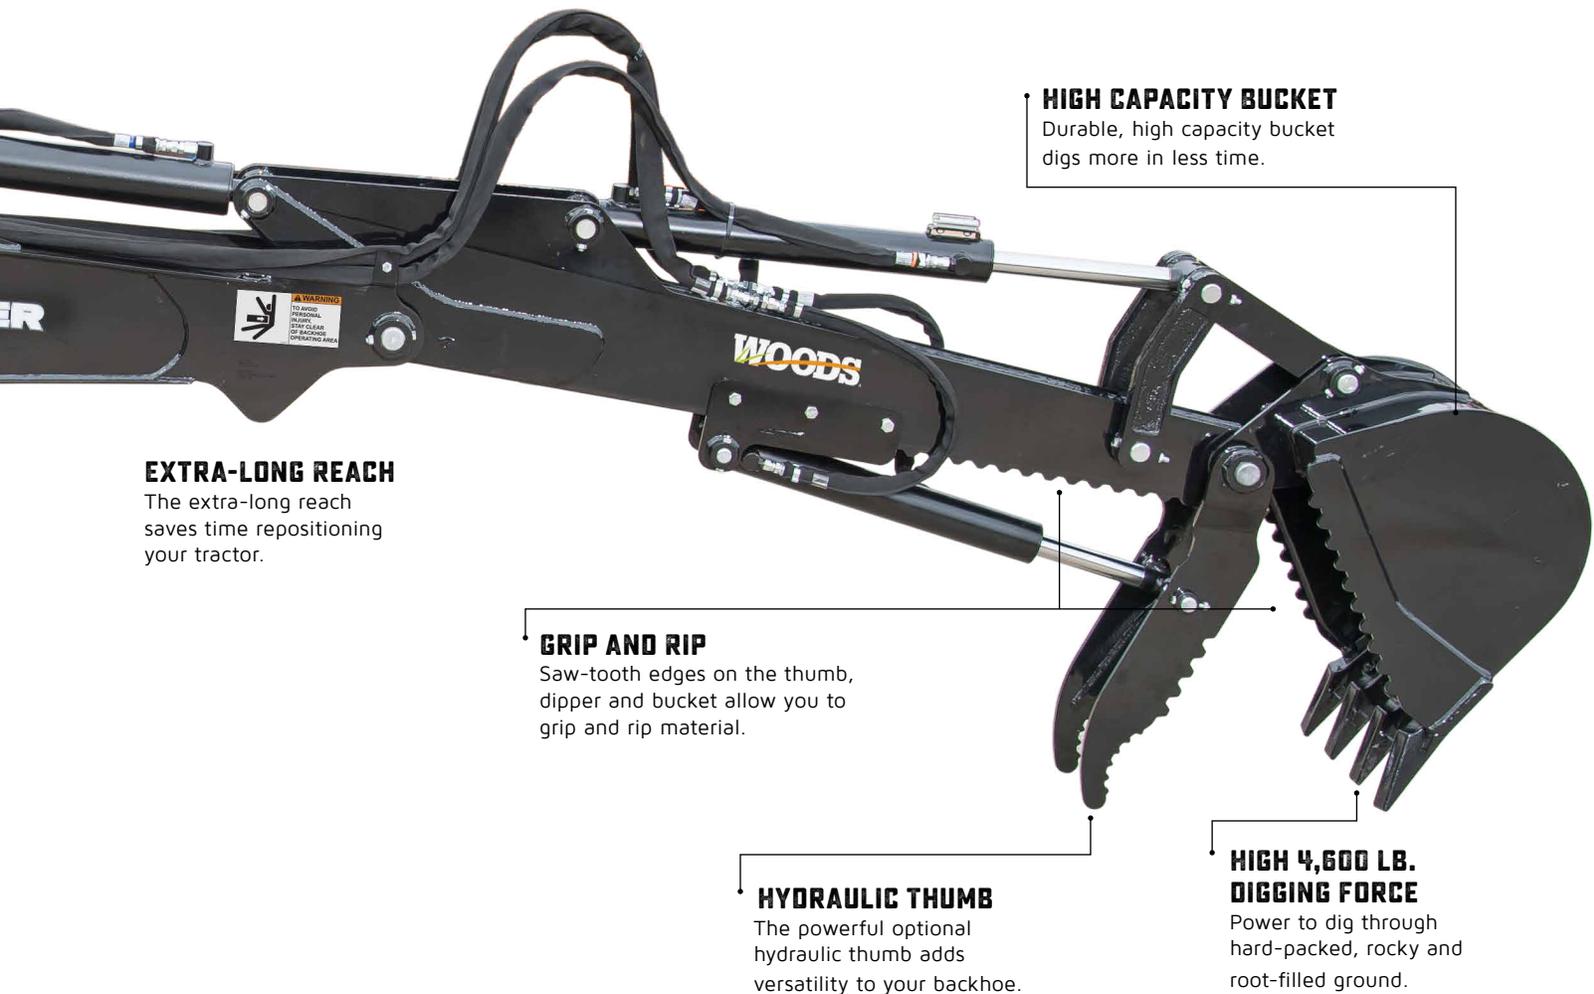

EXTRA-LONG REACH

The extra-long reach saves time repositioning your tractor.

GRIP AND RIP

Saw-tooth edges on the thumb, dipper and bucket allow you to grip and rip material.

HYDRAULIC THUMB

The powerful optional hydraulic thumb adds versatility to your backhoe.

HIGH CAPACITY BUCKET

Durable, high capacity bucket digs more in less time.

HIGH 4,600 LB. DIGGING FORCE

Power to dig through hard-packed, rocky and root-filled ground.

BH65

Shown with optional thumb



THE LATEST WOODS GROUNDBREAKER® BACKHOES ARE RUGGED AND AFFORDABLE—IDEAL FOR TRENCHING, EXCAVATING, AND LANDSCAPING.

TRACTOR PTO HP RANGE: 15 - 40 HP**BH65** | 6.5-foot**BH75** | 7.5-foot

- Curved boom offers better visibility and reaches over obstacles with little repositioning.
- Bolt-on bucket teeth are durable and easy to replace.
- Greasable end pins are simple to maintain and extend work life.
- High ramp angle and ground clearance make transporting easy.
- Sub-frame or 3-point hitch mounts are compatible with most loaders and undermount mowers.
- Optional mechanical thumb available.



MODEL	BH65	BH75
Tractor PTO (HP)	15 – 30	20 – 40
Digging Depth - 2' Flat Bottom (in ft)	78 6.5	90 7.5
Digging Depth - 8' Flat Bottom (in)	52	70
Reach from Swing Pivot (in)	102	119
Loading Height (in)	60	73
Loading Reach (in)	33.5	46
Transport Height (in)	66.5	74
Transport Length (in)	42	45
Approx. Weight - frame only (lbs)	695	842
Swing Arc (degrees)	150	180
Bucket Rotation (degrees)	180	
Stabilizer Spread - Up (transporting) (in)	52	
Stabilizer Spread - Down (operating) (in)	83	
Relief Pressure (psi)	2,030	2,465
Bucket Digging Force (lbs)	2,800	3,380
Dipperstick Digging Force (lbs)	1,590	2,230
Trenching Bucket Widths (in)	9, 12, 16	9, 12, 16, 18, 24
Thumb	Optional mechanical	
Flip-Over Stabilizer Pads	Standard	
Stabilizer Street Pads	Optional	
PTO Pump Kit	N.A.	Optional
2-Cylinder Swing	-	Yes
Warranty	2-year limited warranty includes your tractor	

DON'T JUST DIG...

Pull, pick up and move heavy objects with the optional thumb that adjusts easily with a single pin.





Woods BH100 backhoe received the 2020 ASABE award for outstanding innovation in engineering and technology.

**TRACTOR PTO HP RANGE:
30 - 100 HP**

BH85 | 8.5-foot
BH100 | 10-foot

BH85/BH100 are ideal for:

- Tractors up to 100 hp.
- Construction and demolition.
- Trenching, drainage and excavation work.
- Removing trees, stumps and shrubs.
- Precisely pick-and-place rocks, concrete chunks, logs and landscape timbers.
- Digging efficiently in a wide variety of soil conditions.
- Repositioning odd-shaped, over-sized materials.

MODEL	BH85	BH100
Tractor PTO (HP)	30 - 100	40 - 100
Digging Depth - 2' Flat Bottom (in ft)	102 8.5	120 10
Digging Depth - 8' Flat Bottom (in)	82	102
Reach from Swing Pivot (in)	141	161
Loading Height (in)	83	100
Loading Reach (in)	61	70
Transport Height (in)	94	104
Transport Length (in)	55	55
Approx. Weight - frame only (lbs)	1,275	1,320
Swing Arc (degrees)	180	
Bucket Rotation (degrees)	180	
Stabilizer Spread - Up (transporting) (in)	76	
Stabilizer Spread - Down (operating) (in)	102	
Relief Pressure (psi)	2,465	
Bucket Digging Force (lbs)	4,600	
Dipperstick Digging Force (lbs)	2,940	2,720
Trenching Bucket Widths (in)	12, 15, 18, 24	
Thumb	Optional mechanical or hydraulic	
Flip-Over Stabilizer Pads	Standard	
Stabilizer Street Pads	Optional	
PTO Pump Kit	Optional	
Cemetery / Bellhole Bucket	36	
Ditching Bucket	36	
2-Cylinder Swing	Yes	
Warranty	2-year limited warranty includes your tractor	

TILLAGE EQUIPMENT



RTR72.40

WHEN YOU'RE READY TO DIG IN AND WORK THE SOIL, TURN TO WOODS.

Since 1946, Woods has been making equipment that helps you get your job done right. Because having the right tool for the job makes work seem... well, less like work.

For everyone who loves to work in the dirt, we offer versatile, easy to use disc harrows and rotary tillers in a range of sizes and abilities to fit your job.

WOODS' LINE OF ROTARY TILLERS COUPLES THE BEST DESIGN FEATURES WITH OUTSTANDING PERFORMANCE FOR THE DISCERNING USER. OUR TILLERS WILL HANDLE YOUR LANDSCAPING AND GARDENING PROJECTS WITH EASE.

What's your soil type? Are you cutting into an established lawn or simply turning over the ground after harvest? Woods tillage equipment has innovative design features that make them easy to use, durable and highly productive. In fact, the double-flange blade support design and efficient, low-maintenance gear drive are just two innovations that earned our 30- and 40-series rotary tillers the 2017 ASABE Award for outstanding innovations in product and systems technology.



GEAR-DRIVEN SIDE DRIVE

Robust gear-driven side drive provides years of reliable service and requires far less maintenance than chain-driven units.

STRONG BLADE SUPPORT

Woods' innovative double flange design strengthens blade support and simplifies maintenance.



HIGH-STRENGTH STEEL

Heat-treated, C-shaped tines penetrate deep, even in thick residue and loose, compacted or rocky soil.

3-YEAR GEARBOX WARRANTY

Woods 3-year input gearbox warranty includes seals.



FIXED OFFSET

Fixed offset tiller width covers tire tracks with each pass.

FINISHED SEEDBED

Tapered tailgate removes furrow for a finished seedbed.

EASY DEPTH CONTROL

Adjustable skid shoes provide easy depth control.



EASY HOOK-UP

Sturdy tubular integrated parking stand ensures easy storage and hook-up.

WOODS OFFERS TILLERS IN FORWARD ROTATION IN 41" TO 74" WIDTHS AND REVERSE ROTATION IN 47" TO 74" WIDTHS.

When you're ready to dig in and work the soil, turn to Woods. We bring a well-earned reputation for durability, reliability and innovation to our line of tillage equipment. Woods rotary tillers and disc harrows are designed for a wide range of projects on homes, small farms, orchards or nurseries, and for anyone living the country life. Choose from a large selection of widths, depending upon your tasks.



FORWARD ROTATION TILLERS

are ideal for moist, wet, rocky, sandy or loose soil conditions.

REVERSE ROTATION TILLERS

work best in non-rocky soil conditions. They deliver a smoother top layer of soil by allowing ground cover to travel over the rotor top first, then incorporating it back into the ground beneath a fresh new layer of dirt. More often than not, users can achieve an exceptional seed bed with fewer passes when using a reverse rotation tiller.





30- & 40-SERIES ROTARY TILLERS

TRACTOR PTO HP RANGE: 12 - 50 HP

RT42.30 | 41-inch

RT48.30/RTR48.30 | 47-inch

RT60.40/RTR60.40 | 59-inch

RT72.40/RTR72.40 | 71-inch

- Patented double-flange blade support
- Rugged, heat-treated C-shaped tines for deep penetration in the toughest soils
- Tapered tailgate removes furrow for a finished seedbed
- Sturdy tubular integrated parking stand for easy storage and setup



MODEL	RT42.30	RT48.30/ RTR48.30	RT60.40/ RTR60.40	RT72.40/ RTR72.40
Tractor PTO (HP)	12 - 30	15 - 35	18 - 40	20 - 50
Tractor Hitch	Limited CAT 1 & CAT 1		CAT 1	
Working Width (in)	41	47	59	71
Overall Width (in)	51	57	69	81
Weight (lbs)	478	502 / 508	570 / 578	621 / 630
Maximum Tilling Depth (in)	7			
Drive Type	Gearbox			
Number of Tines / Number of Flanges	20 / 5	24 / 6	28 / 7	36 / 9
Number of Tines per Flange	4 C-type			
Rotor Speed (rpm)	210			
Tractor PTO Speed (rpm)	540			
PTO Driveline Protection	Slip clutch			
Gearbox Housing	Heavy-duty cast iron			
Gearbox Drain Plug	Yes			
Quick-hitch Ready	Yes			

THERE'S NOTHING LIKE THE SMELL OF FRESH-TURNED DIRT, ESPECIALLY WHEN YOU'RE DOING WHAT YOU LOVE... WORKING THE LAND.

Whether you're breaking new ground for a garden, or tilling an existing nursery, food plot, vineyard or farm, Woods has the right – the best – disc harrow for your land. You will get years of productive, reliable, dirt-turning work.

Built with high-strength U.S. steel, these rugged disc harrows carry Woods' reputation for durability and reliability. Plus, these discs are easy to use due to innovative design features like individually adjustable disc gangs that reposition with a single pin.



DHS64
Shown with optional mud scrapers

TAPERED FRAME
Tapered frame design balances individual disc gangs for easy adjustments

TRACTOR HP RANGE: UP TO 85 HP

- DHS48** | 48-inch **DHS64** | 64-inch
- DHS80** | 80-inch **DHM80** | 80-inch
- DHM96** | 96-inch



- Furrow fillers to reduce end ridges*
 - Rear drawbar for towing equipment
 - Mud scrapers that prevent clogging, increase productivity
- * Does not apply to DHS48.



DHM80
Shown with optional drawbar, furrow fillers and mud scrapers

MODEL	DHS48	DHS64	DHS80	DHM80	DHM96
Tractor Engine (HP)	up to 35	25-45	35-55	45-75	55-85
Tractor Hitch	CAT 1, Ltd. CAT 1, CAT 0 optional	CAT 1		CAT 1 & CAT 2	
Width (in)	48	64	80	80	96
Average Weight (lbs) - depending upon blade type	390	508	590	845	960
Disc Blade Type	Notched	Notched; or combination smooth and notched			
Average Weight Distribution per Blade (lbs)	33	36	33	47	44
Disc Diameter (in) / Quantity	16 / 12	18 / 14	18 / 18	20 / 18	20 / 22
Disc Spacing (in)	7.5 front and rear	9 front, 7.5 rear			
Gang Axle Size (in)	1 square			1 1/8 square	
Frame Construction (in)	3 x 3 tube and angle		3 x 3 tube and channel	3 x 3 tube	
Quick-hitch Ready	Yes				

DIRT WORKING

Whether your landscape projects are contained in your own backyard or the way you make your living, you want equipment that's easy to use, easy to maintain, and built to last. That's what Woods delivers.

We build a full line of tools to tackle a variety of projects, such as putting in a new garden, reshaping a driveway, or cleaning up. We'll help you get the most out of the investment you've made in your tractor. And, at the end of the day, we'll help you feel good about all the chores you checked off your list.

PULL IT ALL TOGETHER AND YOU'VE GOT WOODS POWER – POWER TO BE MORE PRODUCTIVE.

BOX SCRAPERS: Designed with exceptional strength and versatility to move large amounts of material.

GRADING SCRAPERS: Ideal for leveling dirt and gravel in driveways, lawns and fields.

REAR BLADES: Move dirt, grade driveways, and clear snow.

LANDSCAPE RAKES: Great for clean-up jobs and fine raking.

POST HOLE DIGGERS: Power through a variety of soil conditions and projects, like planting trees and shrubs or installing deck or fence posts.

QUICK HITCH

Woods TQH1 quick hitch makes easy work of changing from one 3-point attachment to another. When hooking up to many implements, you never have to leave the tractor because lower hooks automatically lock implement into place.

- Heavy-duty steel construction with adjustable top link bracket
- Seven-eighths-inch mounting pins and adapter bushings
- Lower arms lock automatically
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch readiness



	TQH1	TQH2
Tractor Hitch	CAT 1	CAT 2
Width (in)	27.25	27.25
Approximate Weight (lbs)	75	75
Mounting Pin Diameter (in)	.875	.875
Adapter Bushing Diameter (in)	1.125	1.125

TACKLE THE TOUGHEST SPREADING AND GRADING JOBS WITH WOODS® BOX SCRAPERS. FROM THE REINFORCED STEEL A-FRAME TO THE TOUGH, REVERSIBLE CUTTING EDGE AND REPLACEABLE SCARIFIERS, OUR BOX SCRAPERS DELIVER EXCEPTIONAL DURABILITY AND VERSATILITY.

- Easily carve into sod and dirt with full-length, high-strength, double beveled cutting edges.
- Widths from 48 to 96 inches to match a variety of jobs.
- Tackle the most rugged jobs with high-strength moldboards.
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch readiness.

TRACTOR HP RANGE: UP TO 45 HP

- GBC48** | 48-inch
- BSS54** | 54-inch
- BSS60** | 60-inch
- BSS65** | 65-inch
- BSS72** | 72-inch

- Hardened scarifier teeth with replaceable tips
- High-carbon reversible/replaceable cutting edges leaves a level finish



BSS72

TRACTOR HP RANGE: 40 - 65 HP

- BSM72** | 72-inch
- BSM84** | 84-inch

- Offers optional floating, hinged tailgate to provide maximum down force on cutting edge
- End plates: .5-inch – 33% heavier end plates than our BSS models
- One-quarter-inch plate welded inside of end plates to increase life

MODEL	GBC48	BSS54	BSS60	BSS65	BSS72	BSM72	BSM84	
Tractor Engine (HP)	Up to 25	Up to 45				40-65		
Tractor Hitch	Ltd CAT 1 & CAT 1	CAT 1				CAT 1 & CAT 2		
Working Width (in)	48	54	60	65	72	72	84	
Capacity (cubic feet)	9	9.7	10.8	11.7	13.0	13.0	15.1	
Approximate Weight (lbs)	285	486	514	528	551	680	750	
Scarifier Depth (in)	0-1.5	0, 1.5 or 3 adjustable						
Number of Scarifiers	4	4	5	5	6	6	7	
Tailgate Type	Fixed					Fixed, floating optional		
Cutting Edges	2							

Woods grading scrapers are ideal for leveling, whether you're filling potholes in gravel driveways or removing a soil berm after installing field tile.

- Heavy-duty mast plate creates more down force for smoother surface and virtually eliminates washboard effect.
- Adjustable skid shoes and scarifiers increase performance.
- Tall side frames hold more material for leveling.
- Approachable leading edges and structural reinforcements keep scraper stronger for longer.
- Reversible/replaceable high-carbon cutting edges.

**TRACTOR HP RANGE:
15 - 45 HP**

- GSS54P | 53-inch
- GSS60P | 59-inch
- GSS72P | 71-inch

- Three-point hitch:
Limited CAT 1 and CAT 2
- Fourteen- and sixteen-inch
box heights



GSS72P



GSS54P

TRACTOR HP RANGE: 30 - 65 HP

GSM84P | 83-inch

GSM96P | 95-inch

- Three-point hitch: CAT 1 and CAT 2
- Sixteen-inch box height—one of the tallest in the industry



GSM96P

MODEL	GSS54P	GSS60P	GSS72P	GSM84P	GSM96P
Tractor Engine (HP)	15-30	20-45		30-65	
Hitch Category	Limited CAT 1 & CAT 1	CAT 1		CAT 1 & CAT 2	
Working Width (in)	53	59	71	83	95
Overall Width (in)	58	64	76	88	100
Overall Length (in)	42				46
Box Height (in)	14				16
Weight with Scarifiers (lbs)	419	553	655	754	802
Number of Scarifiers	4		5	6	
Scarifier Adjustments	-4.0, -2.5, -1.0, +1.0				-2.5, -1.0, +0.5, +2.5
Reversible Cutting Edge (in)			0.5 x 6		
Skid Shoe Adjustment	-0.75 to +0.75		-1.0 to +0.5		
Lower Hitch Design			Clevis		

DW REAR BLADES

TRACTOR HP RANGE: UP TO 45 HP

RBS54 | 53-inch **RBS60P** | 59-inch
RBS60 | 59-inch **RBS72P** | 71-inch
RBS72 | 71-inch **RBS84P** | 83-inch

- Formed moldboard made from high-strength steel provides exceptional rigidity and pivots 360°.
- Reversible, bolt-on cutting edge adds to product life and enables easy replacement.
- Tilt and offset functions for advanced grading applications (premium models).
- Fast, easy, and safe hook-ups with ASABE quick-hitch readiness.



**IDEAL FOR
GRADING DIRT
OR GRAVEL,
CLEANING UP
CONSTRUCTION
SITES AND
MOVING SNOW.**

MODEL	RBS54	RBS60	RBS72	RBS60P	RBS72P	RBS84P
Tractor Engine (HP)	Up to 30			20-45		
Tractor Hitch	Limited CAT 1 & CAT 1			CAT 1		
Working Width (in)	53	59	71	59	71	83
Moldboard Height (in)	12			15		
Moldboard Thickness (in)	0.182 (grade 80 steel)			0.250 (grade 80 steel)		
Weight (lbs)	134	142	156	268	288	308
Double-beveled, Reversible Cutting Edge Dimensions (in)	0.375 x 6			0.5 x 6		
Angle Adjustments (degrees)	5 positions up to 30					
Offset Adjustments (in)	—	—	—	Up to 12 left or right		
Tilt Adjustments (degrees)	—	—	—	Up to 15		
End Plates	—	—	—	Optional		
Skid Shoes	Optional					
Parking Stand	Optional					
ASABE Quick-hitch Ready	Yes					

RB72.50



TRACTOR HP RANGE: 30 - 65 HP

RB72.50 | 71-inch
RB84.50 | 83-inch
RB96.50 | 95-inch

- Seventeen-inch high, 1/4-inch thick moldboard.
- Double-beveled, reversible, and hardened cutting edge for long life.
- Fully manual offers angle, offset, and tilt adjustments.
- Optional end plates, skid shoes, and hydraulic angle kit (includes relief valve).
- Convenient parking stand is standard.

TRACTOR HP RANGE: 40 - 85 HP

RB84.60 | 83-inch
RB96.60 | 95-inch

- Seventeen and 1/2 inch high, 5/16-inch thick moldboard.
- Double-beveled, reversible, and hardened cutting edge for long life.
- Choose manual or hydraulic, featuring angle, offset, and tilt adjustments.
- Optional end plates, skid shoes, tailwheel, and selector valve.
- Convenient parking stand is standard.

TRACTOR HP RANGE: 50 - 150 HP

RB850 | 95-inch
RB1010 | 119-inch

- Three-point hitch: CAT 2 and 3.
- Available as fully hydraulic, fully manual or combination cylinder options.
- Fully hydraulic models allow precise blade and material control (angle, tilt, and offset).
- Tough, dozer-type full box construction.

MODEL	RB72.50	RB84.50	RB96.50	RB84.60	RB96.60	RB850	RB1010
Tractor Engine (HP)	30-65			40-85		50-100	80-150
Tractor Hitch	CAT 1 & CAT 2			CAT 1 & CAT 2		CAT 2	CAT 2 & CAT 3
Working Width (in)	71	83	95	83	95	95	119
Moldboard Height (in)	17			17.5		17	18
Moldboard Thickness (in)	0.25 (grade 80 steel)			0.313 (grade 80 steel)		0.313	0.25
Weight (lbs)	455	475	495	705	730	1,233	1,535
Double-beveled, Reversible Cutting Edge Dimensions (in)	0.5 x 6						
Angle Adjustments (degrees)	7 positions up to 45 (mech or hyd)			Up to 45 (mech or hyd)		9 forward up to 60; 5 reverse up to 30 (mech or hyd)	Up to 60 (hyd)
Offset Adjustments (in)	6, 12, 18 left or right			Up to 20 (mech or hyd)		Up to 24 (mech or hyd)	Up to 33 (mech or hyd)
Tilt Adjustments (degrees)	5 positions up to 23			Up to 23 (mech or hyd)		Up to 30 (mech or hyd)	Up to 28 (mech or hyd)
Tailwheel	—			Optional			
Parking Stand	Standard						
ASABE Quick-hitch Ready	Yes						



LRS72P

WOODS LANDSCAPE RAKES ARE BUILT WITH RUGGED DURABILITY FOR TOUGH CLEAN-UP JOBS, AS WELL AS FINE RAKING FEATURES FOR LIGHT-DUTY LAWN CARE AND GENERAL MAINTENANCE.

TRACTOR HP RANGE: UP TO 45 HP

- LRS52 | 52-inch LRS72P | 72-inch
- LRS60 | 60-inch LRS84P | 84-inch
- LRS72 | 72-inch LRS96P | 96-inch

- Heavy pivot components increase product longevity.
- Large, structural tine beam channel holds alloy spring steel tines firmly.
- Fast, easy and safe hook-ups with ASABE quick-hitch readiness.
- Optional gauge wheels allow better depth control and optional paring stand for easier attachment.



MODEL	LRS52	LRS60	LRS72	LRS72P	LRS84P	LRS96P
Tractor Engine (HP)	Up to 30			20-45		
Tractor Hitch	Limited CAT 1 & CAT 1			CAT 1		
Working Width (in)	52	60	72	72	84	96
Approximate Weight (lbs)	156	168	186	264	288	311
Pivot Angle	5 positions between 0 and 30 degrees, both forward and reverse					
Tines Dimensions (in)	5/16 x 1					
Tines Spacing (in)	1					
Gauge Wheels	Optional					
ASABE Quick-hitch Ready	Yes					
Parking Stand	Optional					

IDEAL FOR LANDSCAPERS, FARMERS, AND MUNICIPALITIES PLANTING TREES AND SHRUBS OR INSTALLING DECKS AND FENCING IN ALL SOIL TYPES AND CONDITIONS.



Three sizes in three duty classes

PD35.30

**TRACTOR PTO HP RANGE:
14 - 95 HP**

PD25.20

PD35.30

PD95.50

- Heavy-duty welded construction and shear pin increase product longevity.
- Rugged gearbox with tapered roller bearings withstands shock load to handle the toughest projects.
- Wide range of auger bits ensures the best tool for any application.
- Positioning handle standard for easy operating.
- Parking stand for easier storage and hook-up
- PTO driveline holder for easier setup.
- Six-year gearbox warranty.



MODEL	PD25.20	PD35.30	PD95.50
Tractor PTO (HP)	15-25	20-35	35-95
Tractor Hitch	Ltd CAT 1 & CAT 1	CAT 1	CAT 1 & CAT 2
Approximate Weight without auger (lbs)	177	178	245
Drive Type	Gearbox		
Tractor PTO Speed (rpm)	540		
Driveline Protection	Shear bolt		
Positioning Handle	Standard		
Parking Stand	Standard		
Auger (Diameter x Length) (in)	6, 9, 12 x 36	6, 9, 12 x 48	6, 9, 12, 18, 24 x 48
Auger Extension (in)	Optional (12)		



THE WOODS PTO-POWERED STUMP GRINDERS ARE BUILT TO PERFORM – REDUCING TREE STUMPS TO MULCH IN MINUTES AND GRINDING BELOW GROUND LEVEL.

**TRACTOR PTO HP RANGE:
15 - 50 HP**

TSG50 | 20-inch cutting wheel

- Grinds stumps 16 inches above and below.
- Twenty-four tough, carbide steel teeth cut bi-directionally for increased productivity.
- Hinged debris shield allows easier grinding below ground level.



MODEL	TSG50
Tractor PTO (HP)	15-50
Tractor Hitch	CAT 1 & CAT 2
Cutting Wheel Diameter (in)	20
Cutting Wheel Speed (rpm)	1,037
Cutter Tip Speed (fpm)	5,428
Hub Torque (lbs/ft)	76-253
Approximate Weight (lbs)	540
Max Stump Height (in)	16
Max Cutting Depth (in)	16

FLAIL SHREDDERS

TRACTOR PTO HP RANGE: MINIMUM 90 - 240 HP

S15CD | Cutting width: 183 inches

S20CD | Cutting width: 247 inches

S25CD | Cutting width: 303 inches

S27CD | Cutting width: 327 inches

- High capacity gearbox with large oil volume reduces heat buildup, extending bearing and gear life.
- Specially designed oil seal protectors prevent vines from encasing and damaging gearbox oil seals.
- 12.75-inch diameter flail tubes with spiral mounted knives feature increased rigidity, resulting in smoother operation.



TRI-LATERAL HOOD ALLOWS QUADRUPLE SHREDDING ACTION

The first cut occurs at the cutting level, the second at the front panel, the third at the top of the shredder, and the fourth cut occurs at the back of the shredder.

STANDARD L KNIFE

Heat-treated, 6mm reversible for long life

HD-COTTON L KNIFE

Heat-treated, Duraface®, 8mm reversible for longer life and durability in severe conditions



MODEL	S15CD	S20CD	S25CD	S27CD
Minimum Tractor PTO (HP)	90	120	150	162
Tractor PTO (rpm)	1,000			
Adjustable Cutting Height (in)	3–18			
Cutting Width (in)	183	247	303	327
Overall Width (in)	189	253	309	334
Approximate Weight (lbs)	3,600 (2 casters)	4,800 (4 casters)	5,600 (4 casters)	5,900 (4 casters)
Number of L Knives	164	228	284	308
Lift HP Required	90	120	150	165
Pull HP Required	90	120	150	165
Gearbox Rating (HP)	300			
Gearbox Warranty	6-year limited			
Driveline 2 Point & 3 Point	CAT 6			
Pull-type	CAT 6 CV			
Hood Type	Smooth, trilateral shape			
Hood Thickness (in)	.18			
End Plate Thickness (in)	.25			
Flail Tube Diameter (in)	12.75			
Flail Tube End Bearing (in)	2.18			
Shielding	Steel flaps			
Wheel Size (in)	9.5L x 15.6			
Knife Retention	Bolt-on (no D-rings)			
Knife Pattern	Spiral			
Knife Types	Double-edged L (6mm), double-edged HD-cotton Duraface® (8mm) L			
Wheel Arm Types	Rigid Strut available on S15CD, S20CD, S25CD, and S27CD. Caster available on S25CD and S27CD.			
Optional Friction Clutch	24,000 lbs inch rating			
Automatic Clutch	30,000 lbs inch rating (1.75" 20 PTO only)			
Optional Hitches	3-point (quick-hitch ready)			

LOADER ATTACHMENTS



THE RIGHT ATTACHMENT FOR THE JOB.

Chances are, you invested in a loader loader for its power, maneuverability, and versatility. Take your investment to the next level with Woods' branded attachments.


THE RIGHT ATTACHMENT FOR THE JOB.

Every Woods® attachment carries our reputation for rugged reliability, backed by decades of innovative engineering and quality manufacturing.

- Built with high-strength steel welded to American Welding Society (AWS) standards.
- Featuring our Quick Attach coupler system that complies with the universal loader attachment mount specification ISO 24410.

This section features our most popular attachments for farm and ranch applications. Our line of top-quality loader attachments includes:

BALE SPEARS
PALLET FORKS

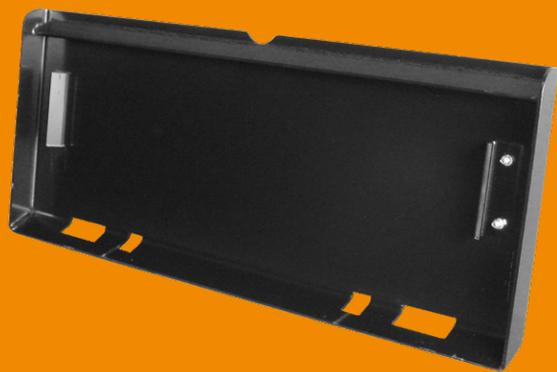

WELD-ON MOUNTING BRACKETS

Adapt attachments to fit with Woods® Spee-D-Change™ and loader (SAE J2513) quick attaching systems

- Attachment back plate fits loaders with quick attaching systems (SAE J2512)
- Attachment frame fits Woods models 110, 115, 195, 200/205/210, 215/255/260, 275, 305/310, 315/355/360 Spee-D-Change

BALE SPEARS

Single, double, and triple bale spears let you efficiently move and stack round and large square bales.

BS3044 | Single Spear

BS6044 | Double Spear

BS4032 | Triple Spear


All models are available for loader and tractor attachment systems:

- Durable drop-forged spears and high strength steel frame provide longer product life.
- High carry load ratings increase performance.
- Optional step kit enables easier access to loader cabs.
- Optional vertical backstops on the triple bale spear allow stacking while transporting.
- Loader, ISO, or John Deere® Quick Attach available.



MODEL	BS3044	BS6044	BS4032
Number of Spears	1	2	3
Number of Stabilizer Spikes	2	n/a	
Usable Spear Length (in)	44		32
Spear Diameter (mm)	45		
Maximum Carry Load (lbs)	3,000	6,000	4,000
Spear Material	Drop-forged steel		
Frame Material	High-strength steel plate		
Frame Dimensions (in) (W x H)	45 x 21		57.5 x 21
Quick Attach Systems	BS3044 available in all 3 systems, BS6044 and BS4032 only in Euro and Loader		
Step Kit	Optional		
Vertical Backstops	n/a		Standard

WOODS' VERSATILE, PALLET FORKS ARE DESIGNED WITH A FULL-HEIGHT FRAME AND WALK-THRU CAPABILITY. IDEAL FOR LIFTING AND MOVING MATERIAL WITH YOUR LOADER. CHOOSE FROM 2,200, 4,400, OR 6,600 LB. FORK CAPACITY.

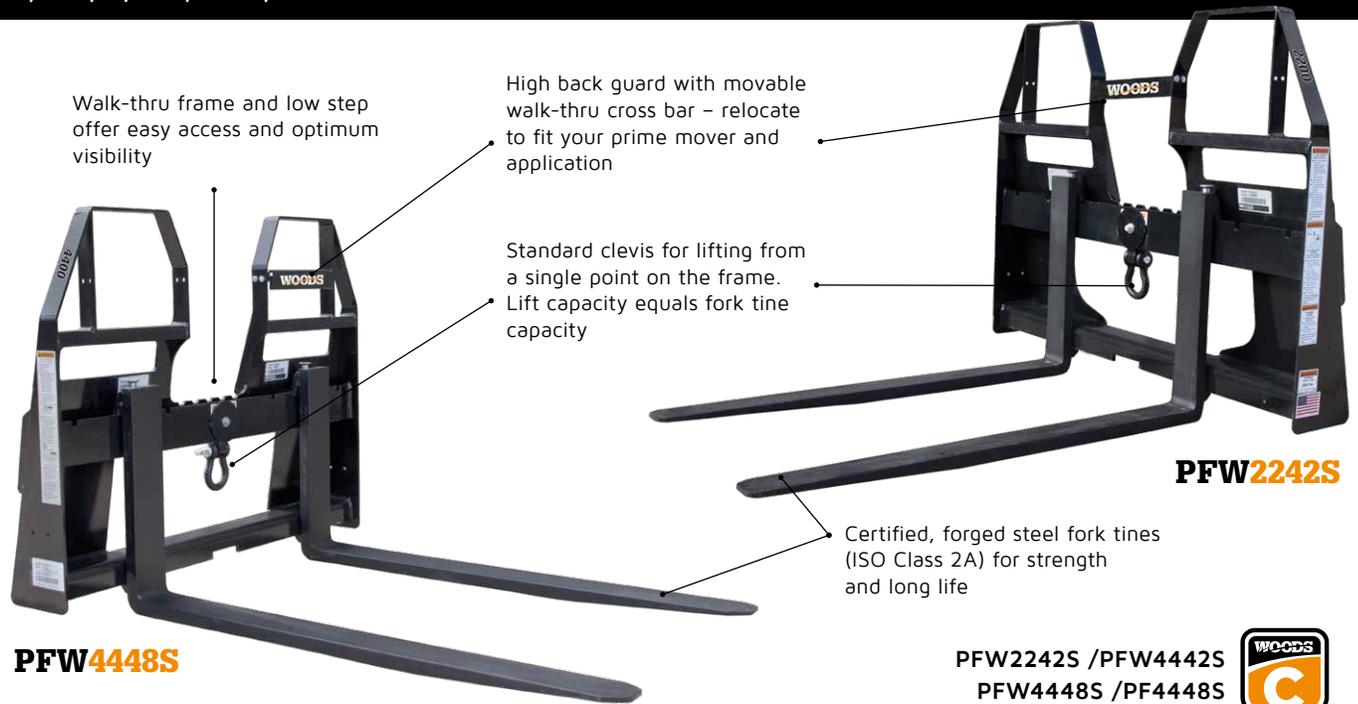

PFW2242S /PFW4442S
PFW4448S /PF4448S

MODEL	PFW2242S	PFW2242JD	PFW4442S
Frame Type	Walk-thru with full frame option		
Coupler System Compatibility	Skid steer	John Deere®	Loader
Operating Weight (lbs)	275	255	360
Fork Capacity at 19.7 in from Tine Face (lbs)	2,200	2,200	4,400
Fork Tine Dimensions (L x W x H) (in)	42 x 3.2 x 1.2		48 x 3.9 x 1.4
Fork Tine Spread Range (in)	12 - 45 outside to outside		
Fork Tine Type	Double hook lock down (ISO Class 2A)		
Clevis	Standard		

MODEL	PF4448S	PFW4448S	PFW4448JD	PFW4448E	PFW6648S	PFW6648E
Frame Type	Full frame	Walk-thru with full frame option				
Coupler System Compatibility	Loader	Loader	John Deere®	ISO 23206	Loader	ISO 23206
Product Weight (lbs)	390	380	380	370	470	455
Fork Capacity at 19.7 in from Tine Face (lbs)	4,400	4,400	4,400	4,400	6,600	6,600
Fork Tine Dimensions (L x W x H) (in)	48 x 3.9 x 1.4				48 x 3.9 x 1.8	
Fork Tine Spread Range (in)	12 - 45 outside to outside					
Fork Tine Type	Double hook lock down (ISO Class 2A)					
Clevis	Standard					

Robotically welded for consistent high quality. Compatible with Loader (ISO 24410), John Deere®, and ISO 23206 Quick Attach Systems.

PARTS PROVEN TO LIVE UP TO THE HIGHEST STANDARDS – OURS.

WE ENGINEER OUR PARTS FOR QUALITY AND A PROPER FIT TO GIVE YOUR WOODS ATTACHMENT THE LONGEST POSSIBLE LIFESPAN.



Woods OEM parts are the only parts that have been proven to pass our rigorous testing and meet our demanding standards for strength, wear, and performance. Not only are they designed to fit and work perfectly with your implements, but Woods parts also restore to your tractor attachments to like-new condition, so your equipment is certain to be ready to tackle your next outdoor challenge.

KEEP YOUR TRACTOR ATTACHMENTS IN TOP WORKING CONDITION WITH WOODS GENUINE OEM PARTS.

CHOOSE FROM OUR WIDE RANGE OF WOODS GENUINE OEM PARTS, INCLUDING:

- Blades
- Belts
- Bushings
- Chains & Hooks
- Hardware
- Idlers
- Wheels, Tires, and Rims
- And More!





Patent info at: woodsequipment.com/patents

WOODS® | Woods Equipment Company
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com
Patent info at: woodsequipment.com/Our-Story



Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2022 Woods Equipment Company. All rights reserved. WOODS and Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

B011201 December 2022