



MASSEY FERGUSON

WOODS
75TH ANNIVERSARY SINCE 1946

IMPLEMENTS CATALOG

2021



WITH OVER 50 MODELS
FOR SUB-COMPACT AND
COMPACT TRACTORS

A POWERFUL TEAM TAKES THE FIELD



WOODS



MASSEY FERGUSON

YOUR MISSION IS SIMPLE: to get the job done. You don't want every bell and whistle. You want power, efficiency, safety – and reliability.

How do we know? Because Massey Ferguson has been working alongside farmers for more than 160 years. It's how we've come up with innovations farmers really need — like the first three-point hitch. And the most productive CVT transmission in the world.

The Perfect Match

Now Massey Ferguson has teamed up with Woods Equipment, a company that's also steeped in tradition and innovation. Both companies have been around for generations — something you can count on to continue.

Together, we offer you an impressive combination of power and reliability — whether you're cutting tough brush or maintaining a pristine landscape.

Implementing Reliability

Long known for equipment that's easy to operate and loaded with safety features, Woods joins Massey Ferguson in delivering a total package that includes the right tractor with a full range of quality implements. Put them together, and you've got one reliable farming solution.

FIND A DEALER

To learn more and find the dealer near you, go to masseyferguson.us



Innovation Since 1946

Woods' long history of innovation began with Leonard W. Wood and his brothers, Mervel and Keith. In a post-war era, Oregon, Illinois, ripe for entrepreneurship, the brothers worked together to build the first successful tractor-mounted rotary cutter, and eventually founded Woods Brothers Manufacturing Co., in 1946.

Since that time, Woods has secured over 65 patents and built a global footprint in agriculture machinery with manufacturing and distribution throughout North America, Latin America and Australia. Today, Woods attachments and implements are used for mowing roadsides and parcels, maintaining pastures and waterways, shredding crops, and countless other applications.

WHAT'S INSIDE

Rotary Cutters	4
12-foot Batwing®	6
15-foot Batwing	8
20-foot Batwing	12
RC-series Single-spindle Standard Cutters	14
BrushBull™ Single-spindle Premium Cutters	16
Ditch Bank Cutters	22
Multi-spindle Cutters	23
Offset Multi-spindle	27
Finish Mowers	30
TurfKeeper™ Rear-mount Mowers	32
TurfKeeper Pro™ Rear-mount Mowers	34
RD990X Rear Discharge Mower	36
Turf Batwing® Mowers	37
Snow Blowers	38

Landscape Equipment	40
Quick Hitch	41
Box Scrapers	42
Grading Scrapers	43
Rear Blades	44
Landscape Rakes	48
Post Hole Diggers	50
Tillage Equipment	52
Rotary Tillers	54
Disc Harrows	56
Seeders	58
Food Plot Seeders	60
Precision Super Seeders	61
Compact Super Seeders	62

**TOP FIVE
IMPLEMENTS**

SEE PAGES 66-67 FOR
THE TOP 5 IMPLEMENTS
EVERY FARM NEEDS.

Batwing® **ROTARY CUTTERS**

**WE NOT ONLY BUILD
THE TOUGHEST BATWING®,
WE BUILD THE ONLY BATWING.**

PROVEN DURABILITY

We not only build the toughest Batwing®, we build the only Batwing. But, don't just choose us for our name, choose us for the hours of testing in extreme conditions, the rugged sub-structure, and the industry-leading welding and paint standards. Choose Batwing for the sheer ability to tame the most unruly waterways, pastures and roadsides.

UNBEATABLE PERFORMANCE

Higher torque capacities, deeper decks and our innovative wing design ensure you'll mow more material in less time. Woods Batwing cutters set the standards for cut quality, distribution and ease of use, whether you're cutting heavy grass, thick weeds and brush up to 4.5 inches in diameter.





BW15.50

ROTARY CUTTERS | **12' Batwing®**

The original Batwing in a 12-foot width, designed specifically for compact tractors.



BW12

* NOTE: All Batwing models with removable shielding have been tested without shielding and pass all applicable safety standards for thrown objects. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that chain shielding be used for extra protection.

ROTARY CUTTERS | 12' Batwing®



BW12

Shown with standard chain shielding.

TRACTOR PTO HP RANGE: MINIMUM 35 HP

BW12 | 12-foot Flexwing Cutter for Compact / Utility Tractors

Requiring a minimum of 35 hp, the BW12 gives you Woods quality and performance in a sleek, round-front design and our industry-leading sloped deck.

- Total weight 2,450 lbs. with 750-lb tongue weight, ideal for use on lower horsepower compact and utility tractors.
- Twelve-gauge, high-strength steel and smooth, sloped deck provide durability for long life.
- Easy hook-up reduces preparation time and frustration.
- Fully baffled deck ensures better distribution of cut material, and the performance you expect from Woods.
- Six-year gearbox warranty including seals, for confidence in your purchase decision.
- Standard chain shielding, for added safety and peace of mind.

MODEL	BW12
Tractor PTO HP	35 hp minimum
Tractor Hitch	swivel clevis
Cutting Width	12.2"
Adjustable Cutting Height	2" - 12"
Cutting Capacity	1.5" dia
Gearbox HP	160 hp - splitter / 75 hp - center and wing
Blade Tip Speed	14,300 fpm center / 14,900 fpm wing
Deck Thickness	12 ga, high-strength steel
Side Frame Thickness	7 gauge
Deck Side Depth	11"
Weight (tongue/total)	750 lbs / 2,450 lbs
Blade Dimensions	.5" x 4"
Blade Overlap	6"
Flex Wing	90° up, 22° down
Tires	21" laminated; new AG; or foam-filled
Suspension	spring on center section
PTO Driveline (main/wing)	CAT 4 / CAT 3
Cutting Area Shielding	standard chain shielding
Warranty (cutter/gearbox)	1 year / 6 year limited

THE BEST BATWING® YOU EVER DESIGNED.

The customer-designed 15-foot series Batwing from Woods.
It's more reliable, more durable, easier-to-use, easier-to-maintain and built
to perform better. It's the flexwing cutter you always wanted, you just
needed a company to build it.



**“I WANT TO CUT MORE
AND MAINTAIN LESS”**

Ben Faivre, Polo, Illinois
Farmer and Batwing Designer


**“I WANT A QUICK
AND EASY TRACTOR
HOOK-UP”**

Steve McCullough, Watseka, Illinois
Third Generation Family-owned Dealership and
Batwing Designer



**“I WANT TO GET
RID OF DEBRIS
COLLECTING
ON THE DECK”**

Shawn Schaaf, Rock City, Illinois
Rock Run Township Highway Commissioner
and Batwing Designer

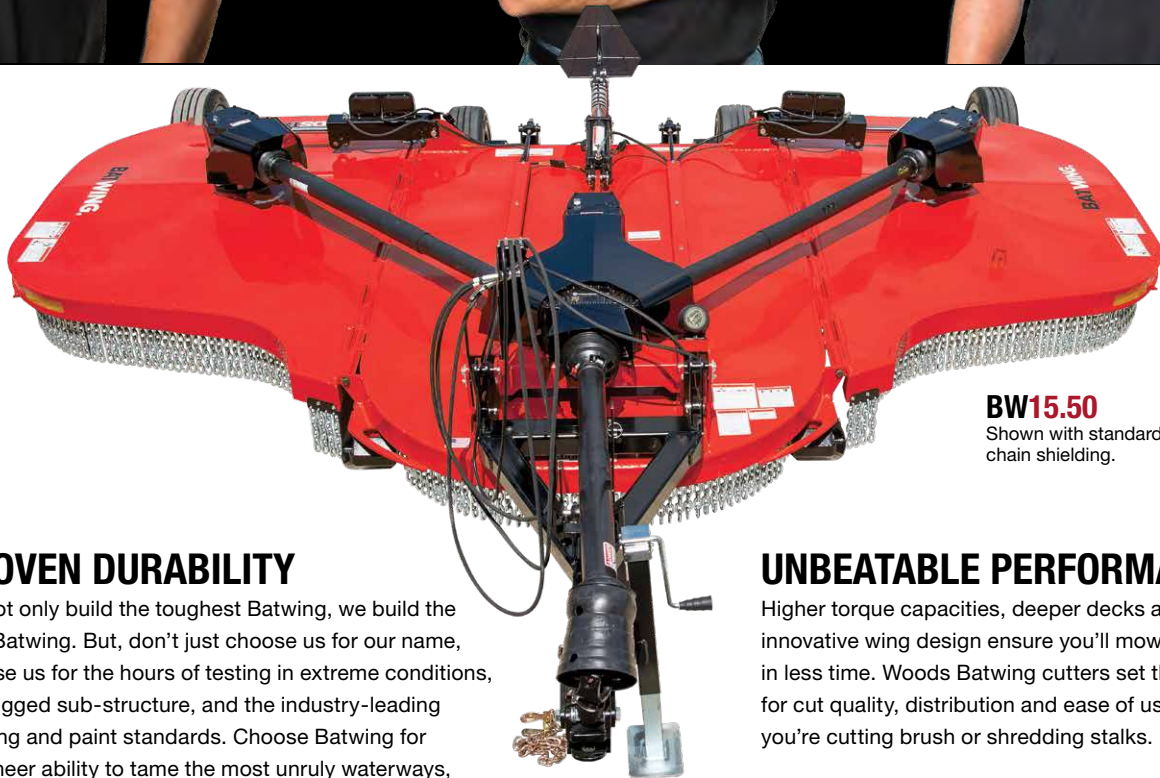

BW15.50
Shown with standard
chain shielding.

PROVEN DURABILITY

We not only build the toughest Batwing, we build the only Batwing. But, don't just choose us for our name, choose us for the hours of testing in extreme conditions, the rugged sub-structure, and the industry-leading welding and paint standards. Choose Batwing for the sheer ability to tame the most unruly waterways, pastures and roadsides.

UNBEATABLE PERFORMANCE

Higher torque capacities, deeper decks and our innovative wing design ensure you'll mow more material in less time. Woods Batwing cutters set the standards for cut quality, distribution and ease of use, whether you're cutting brush or shredding stalks.

ROTARY CUTTERS | 15' Batwing®

Maintain grassy fields, pastures, waterways, parks and airports; cut weeds and light brush up to 3 inches in diameter.



BATWING.

BW15.50

Shown with standard chain shielding.

TRACTOR PTO HP RANGE: 45 - 200 HP

BW10.50 | 10.5-foot Flexwing Cutter

BW15.50 | 15-foot Flexwing Cutter

The BW15.50 is ideal for cutting tall grasses and saplings up to 3 inches in diameter.

Here are just a few features exclusive to Woods that rotary cutter users like you told us were important in our 15-foot series.

- New patented driveline lift assistance system makes it easy to hook up; standard on all models.
- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Greasable patented Quick-change blade pins are easy to remove.
- New patented regressive spring design reduces shock transfer and wear to cutter body.

MODEL	BW10.50*/BW15.50
Tractor PTO HP Range	45 - 200 hp
Adjustable Cutting Height	2" - 15"
Cutting Capacity	3" dia
Cutting Width	126" / 180"
Blade Tip Speed	15,000 fpm at 540 rpm 16,000 fpm at 1000 rpm
Weight	4,040 lbs / 4,340 lbs
Tongue Weight	1,150 lbs / 1,200 lbs
Center Deck / Wing Deck	10 gauge
Side Skirt Thickness	.25"
Side Skirt Depth	13"
Transport Width	96"
Stump Jumper	Round
Flex	90° up, 22° down
Driveline Rating	CAT 6 CV main / CAT 4 wing
Splitter Gearbox Rating	210 hp
Wings Gearbox Rating	200 hp
Output Shaft Size	2" dia
Gearbox Warranty	6 years
Options	<ul style="list-style-type: none"> • double row chain shielding • dual wheels • LED lights

* Single-wing version

ROTARY CUTTERS | 15' Batwing®

Maintain grassy fields, pastures, waterways, parks and airports; cut heavier brush and trees up to 4.5 inches in diameter.



TRACTOR PTO HP RANGE: 55 - 275 HP

BW10.60 | 10.5-foot Flexwing Cutter

BW15.60 | 15-foot Flexwing Cutter

The BW15.60 easily powers through tall brush and trees up to 4 inches in diameter.

TRACTOR PTO HP RANGE: 65 - 300 HP

BW10.70 | 10.5-foot Flexwing Cutter

BW15.70 | 15-foot Flexwing Cutter

The rugged BW15.70 can tame the harshest conditions – heavy brush and trees up to 4.5 inches in diameter. Ideal for professional and contract cutting.

BATWING®

SLOPED DECK

Smooth and sloped seven-gauge steel decks shed water and debris; deck design and baffling helps recut material, ensuring a finer shred and more even distribution.



BW15.60

Shown with standard chain shielding.

GEARBOXES

Massive, heavy-duty gearboxes deliver more cutting power and performance with a six-year limited warranty.



ROTARY CUTTERS | 15' Batwing®

MODEL	BW10.60* / BW15.60	BW10.70* / BW15.70
Tractor PTO HP	55 - 275 hp	65 - 300 hp
Adjustable Cutting Height	2" - 15"	
Cut Capacity	4" dia	4.5" dia
Cutting Width	126" / 180"	
Blade Tip Speed	15,700 fpm at 540 rpm 16,000 fpm at 1000 rpm	
Weight	4,400 lbs / 4,600 lbs	5,500 lbs / 5,290 lbs
Tongue Weight	1,350 lbs	1,490 lbs
Center Deck / Wing Deck	7 gauge	1/4"
Side Skirt Thickness	.25"	
Side Skirt Depth	13"	
Transport Width	96"	
Stump Jumper	Round	
Flex	90° up / 22° down	
Driveline Rating	CAT 6 CV main CAT 4 wing	CAT 6 CV main CAT 5 wing
Splitter Gearbox Rating	275 hp	
Wings Gearbox Rating	225 hp	
Output Shaft Size	3" dia	
Gearbox Warranty	6 years	
Options	<ul style="list-style-type: none"> • double row chain shielding • dual wheels • LED lights • shredding kit • deck ring • spring axle • full walking tandem 	<ul style="list-style-type: none"> • double row chain shielding • dual wheels • LED lights • shredding kit • deck ring • spring axle • full walking tandem

* Single-wing version

- New patented driveline lift assistance system makes it easy to hook up.
- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Greasable patented Quick-change blade pins are easy to remove.

PLUS,

- Beefy, heavy-duty skid shoes prevent gouging and protect the deck.
- Strategically placed, welded baffles cut and distribute debris evenly.
- Center and wing decks feature high-strength 7 gauge steel (.60) or .25 inch thick steel (.70) for added durability.
- The side skirt is 13 inches deep and made of .25 inch thick steel for greater material capacity and the strength to manage it.
- For added toughness in extreme conditions, the .60 and .70 models have a 3-inch gearbox output shaft and optional deck ring.
- Other options include LED lights, double row chain shielding, dual wheels and, for the .60 and .70 models, a shredding kit for added versatility.

SKID SHOES

Bolt-on, heavy-duty skid shoes with an "approachable" leading edge reduce sod damage when turning.



BW15.70

Shown with standard chain shielding.

ROTARY CUTTERS | 20' Batwing®




QUICK-CHANGE GREASABLE BLADE SYSTEM

Woods' exclusive Quick-change blade system allows for easy changing of blades from the top of the deck.

MODEL	BW20.51 / BW20.61
Tractor PTO HP Range	70 - 200 hp / 70 - 300 hp
Main Driveline	CAT 6 CV
Wing Driveline	CAT 4 telescoping profile
Tractor Hitch	clevis/self-leveling clevis; optional pintel ring
Cutting Width	240"
Adjustable Cutting Height	2" - 15"
Cutting Capacity	2"/3" dia
Side Frame Depth	13.25"
Tractor PTO rpm	540 or 1,000
Transport Width	123"
Overall Width x Length	250" x 198"
Deck Type	smooth, sloped
Deck Thickness	.135"
Side Frame Thickness	.25"
Hinges/Hinge Rod Diameter	1"
Weight	6,510 lbs / 6,600 lbs
Number of Gearcases	4
Vertical Shaft Size	2"/2.38"
Splitter/Wing HP	250 / 120 / 250 / 205 hp
Blade Thickness	.5"
Blade Width	4"
Blade Type	hi-lift, flat or shredder
Blade Overlap	6"
Blade Tip Speed at 540 rpm	15,450 fpm
Blade Tip Speed at 1,000 rpm	16,300 fpm
Material Flow System	standard baffles
Stump Jumper Type	standard round-welded
Hydraulics Wing Flex	90° up, 22° down
Suspension	standard spring suspension or tandem spring arms
Wheel Type	15" rims; 21" laminated; 24" new Ag; or 29" used aircraft
Cutting Area Shielding	single or double chain
Gearbox Warranty (limited)	6 years

GREASABLE PIVOT PINS

Greaseable pivot points are located on turnbuckle and axle arms to increase durability and reduce wear.

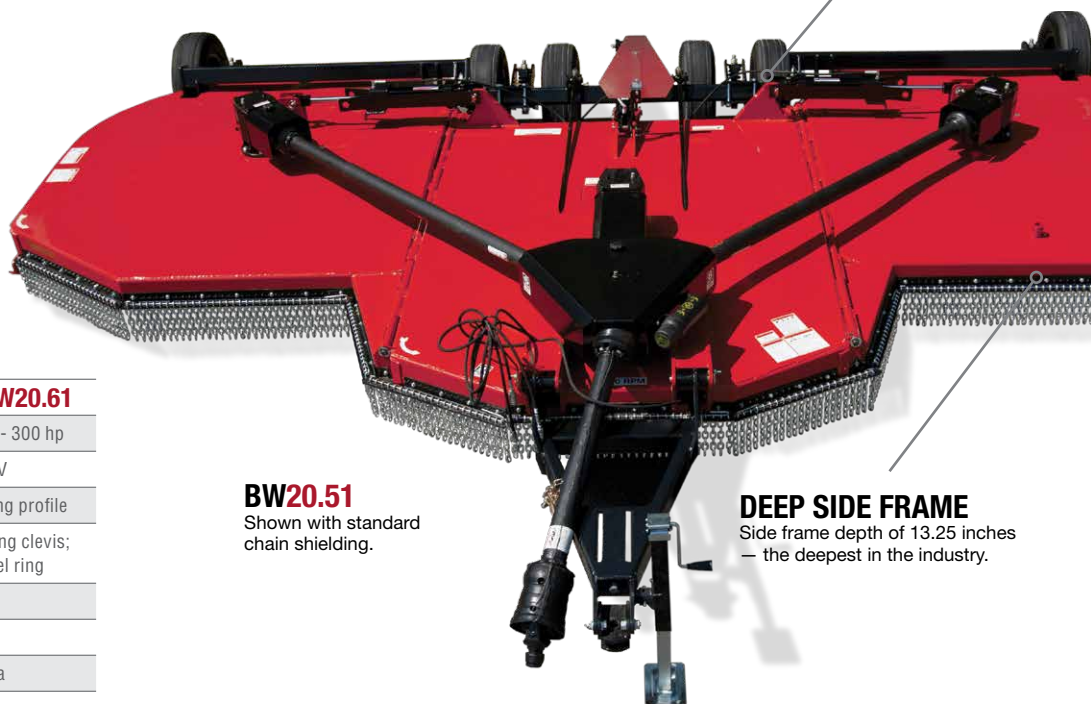

BW20.51

Shown with standard chain shielding.

DEEP SIDE FRAME

Side frame depth of 13.25 inches — the deepest in the industry.

TRACTOR PTO HP RANGE: 70 - 200 HP

BW20.51 | 20-foot Flexwing Cutter

- Main driveline: CAT 6 CV.
- Cuts brush up to 2 inches in diameter.
- Walking tandem axle available.

TRACTOR PTO HP RANGE: 70 - 300 HP

BW20.61 | 20-foot Flexwing Cutter

- Maintain driveline: CAT 6 CV.
- Cuts brush up to 3 inches in diameter.
- Side frame depth of 13.25 inches — the deepest in the industry.
- Optional shredding kit.

*** NOTE:** All Batwing models pass all applicable safety standards for thrown object without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that chain shielding be used for extra protection.



ROTARY CUTTERS | 20' Batwing®

TRACTOR PTO HP RANGE: 70 - 300 HP

BW20.71 | 20-foot Flexwing Cutter

BW13.71 | 13.5-foot Single-wing Cutter

- Main driveline: CAT 6 CV.
- Deck plate has two layers of .135" plate.
- Cuts brush up to 4 inches in diameter.
- Side frame depth of 12.5 inches.
- Optional dual tires available for wings.
- Optional shredder kit or optional blade ring.
- Six-year gearbox limited warranty.

BW20.61

Shown with standard chain shielding.



MODEL	BW20.71	BW13.71 (SINGLE-WING)
Tractor PTO HP Range	70 - 300 hp	
Main Driveline	CAT 6 CV	
Wing Driveline	CAT 5	
Tractor Hitch	self-leveling swivel clevis; optional pintle ring	
Cutting Width	240"	162"
Adjustable Cutting Height	2" - 15"	
Cutting Capacity	4" dia	
Side Frame Depth	12.5"	
Tractor PTO rpm	540 or 1,000	
Transport Width	123"	100"
Overall Width x Length	250" x 198"	171" x 198"
Deck Type	smooth, sloped double-deck	
Deck Thickness	.135" / .135" upper/lower	
Side Frame Thickness	.25"	
Hinges/Hinge Rod Diameter	1" full length	
Weight	7,740 lbs	8,500 lbs
Number of Gear cases	4	3
Vertical Shaft Size	2.38"	
Splitter Wing HP	250/210 hp	
Blade Thickness	.5"	
Blade Width	4"	
Blade Type	hi-lift, flat or shredder kit	hi-lift, flat
Blade Overlap	6"	
Blade Tip Speed at 540 rpm	15,450 fpm	
Blade Tip Speed at 1,000 rpm	16,650 fpm	
Material Flow System	standard baffles	
Stump Jumper Type	standard round-welded	
Hydraulics Wing Flex	90° up, 22° down	left or right wing – 90° up, 22° down
Suspension	standard spring suspension or optional tandem spring arms	
Wheel Type	15" rims; 21" laminated; 24" new Ag; or 29" used aircraft	
Cutting Area Shielding	single or double chain	
Gearbox Warranty (limited)	6 years	


ROTARY CUTTERS | **Single-spindle**



WOODS RC-SERIES ROTARY CUTTERS



Breaklink allows cutter to float and follow terrain for better cut quality.



Optional bolt-on replaceable skid shoes for longer wear.



Optional chain shielding for added protection from thrown objects.

AN ECONOMICAL ROTARY CUTTER FOR MAINTAINING GRASSY PASTURES, OPEN FIELDS AND RECREATIONAL TRAILS.

RC-Series Single-spindle Rotary Cutters are the ideal attachment to get the most from your compact or sub-compact tractor. Designed for durability and built with high-strength steel, we confidently stand behind this product with a three-year gearbox warranty.

TRACTOR PTO HP RANGE: 15 - 50 HP

RC42.20 | 3.5-ft **RC48.20** | 4-ft
RC60.20 | 5-ft **RC72.20** | 6-ft

- Four cutting widths to fit the size of your job.
- Unique smooth, sloped decks are easy to clean and reduce build-up of water and debris.
- Stump jumpers are standard on all models for added driveline protection.
- High-strength steel and quality parts provide dependable service year after year.
- Three-year gearbox warranty is one of the best in the industry.

MODEL
Tractor PTO HP
Hitch Category
Cutting Width
Adjustable Cutting Height
Cutting Capacity
Gearbox Horsepower
Blade Tip Speed
Deck Side Depth
Weight
Blade Dimensions
Blade Carrier
Tailwheel
Driveline Protection
Frame & Deck Support
Tractor PTO Speed
Quick-hitch Ready
Cutting Area Shielding
Warranty (cutter/gearbox)

RC42.20	RC48.20	RC60.20	RC72.20
15 - 40 hp		20 - 50 hp	
CAT 1			
3.5'	4'	5'	6'
2" - 9"			
1" dia			
50 hp			
11,460 fpm	13,100 fpm	13,620 fpm	14,340 fpm
7"			
360 lbs	410 lbs	494 lbs	575 lbs
.5" x 3"			
oval stump jumper			
4" x 16" laminated			
shear-bolt or slip-clutch			
3/8" rails			
540 rpm			
yes			
belt standard / chain shielding optional			
1 year / 3 years			

HEAVY-DUTY TAILWHEEL ASSEMBLY

Formed, reinforced A-frame resists bending when backing into immovable objects.

RC72.20

Shown with optional chain shielding.



ROTARY CUTTERS | **BrushBull™ Single-spindle**

RUGGED AND RELIABLE, THE WOODS BRUSHBULL™ IS BUILT TO TACKLE YOUR TOUGHEST BRUSH CUTTING CHORES.

Our most popular models are ideal for clearing brush along fence rows, maintaining miles of interstate highways, and cutting overgrown grass, weeds and brush wherever you need to tame the land.



START AT THE BEGINNING

Since 1946, Woods has grown to become the undisputed cutter expert. This legacy began with development of the first tractor-mounted rotary cutter and continues today with unmatched product innovations such as greasable Quick-change blade pins and a smooth, sloped deck that sheds debris.

And yet, we still go back to customers like you before redesigning a product. Erasing preconceptions, we listen – really listen – to what you need and value. Then, Woods Engineers go to work creating a product that you will love to use.

Finally, we make it just a bit more durable, kick up the performance and add style, because that's what people expect from Woods.

Newly redesigned, the top-selling Woods BrushBull™ is easy to use and maintain, delivers superior cut quality and performance, and looks good doing it. Year after year after year.



TRACTOR PTO HP RANGE: 15 - 75 HP

BB48.30 | 48-inch

BB60.30 | 60-inch

BB72.30 | 72-inch

- Three-point hitch: CAT 1.
- Cuts brush up to two inches in diameter.
- Six-year limited gearbox warranty includes the seals.
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.



TRACTOR PTO HP RANGE: 35 - 90 HP

BB84.40 | 84-inch

- Three-point hitch: CAT 1 & 2.
- Cuts brush up to two inches in diameter.
- Six-year limited gearbox warranty includes the seals.
- Eleven-inch deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Choose an optional dual tailwheel for adjusting the mowing height.



WOODS BRUSHBULL™



BB72.30

Shown with optional chain shielding.

MODEL	BB48.30	BB60.30	BB72.30	BB84.40
Tractor PTO HP	15 - 50 hp	25 - 50 hp	30 - 75 hp	35 - 90 hp
Hitch Category/Type	CAT 1 clevis			CAT 1 & 2 clevis
Cutting Width	48"	60"	72"	84"
Total Weight	590 lbs	672 lbs	811 lbs	1,041 lbs
Cutting Capacity Diameter	2"	2"	2"	2"
Adjustable Cutting Height	1" - 9"			2" - 12"
Transport Width	55"	67"	79"	91"
Overall Length	86"	99"	111"	124"
Tractor PTO Speed	540 rpm			540 rpm
Quick-hitch Compatible	yes			yes
Rear Bumper	Z-channel			Z-channel
Frame & Deck Support	3" x 3" tube			3" x 3" tube
Deck Construction	smooth top, sloped			smooth top, sloped
Skid Shoes	full-length, replaceable			full-length, replaceable
Deck Thickness	12 ga (.105")		11 ga (.120")	11 ga (.120")
Side Frame Thickness	10 ga (.135")			10 ga (.135")
Side Frame Depth	10.5"			11.6"
Gearbox Warranty	6-year limited			6-year limited
Gearbox HP	65 hp	65 hp	75 hp	90 hp
Output Shaft Diameter	1.57"			2"
Blade Tip Speed	13,000 fpm	14,335 fpm	14,963 fpm	15,086 fpm
Blade Dimensions	.50" x 4"			.50" x 4"
Blade Pin Diameter	1.50"			1.50"
Blade Carrier	oval stump jumper			oval stump jumper
Driveline Protection	slip-clutch			slip-clutch
Options	check chain			check chain, dual tailwheel

ROTARY CUTTERS | **BrushBull™ Single-spindle**

Easy to Operate

Customers like you told us what's important in a single-spindle cutter. Then, we redesigned our premium BrushBull cutter to meet – and exceed – your needs. An adjustable drive lift hanger and Quick-hitch compatibility make it easy to attach. A large access window on top of the deck and our exclusive, greasable Quick-change blade pins make blade changes easy, even in the field. But, you're not sacrificing performance for ease. A deep deck, large half-inch by four-inch blade and welded baffle work together, creating a strong suction that lifts, then evenly cuts and distributes large amounts of material.

Proven Durability

Choose a BrushBull for the hours of testing in extreme conditions, and a Z-shaped, high-strength steel bumper that's twice as thick as competitive models, for added durability when backing over tough brush. Or, choose Woods for the advanced gearbox seal technology that's so good our 6-year limited warranty includes the seals. That's worry-free reliability.

Easy to Maintain

Woods was the first to introduce a smooth, sloped deck that sheds debris. Front corners angle back to give operators more room between the tractor tire and cutter.

DRIVELINE HANGER

Adjustable driveline hanger makes it easier to attach, and is standard on all models.

MORE ROOM

Corners angle back to give operators more room between the tractor tire and cutter.

SKID SHOES

Full-length, bolt-on skid shoes protect the deck and are easy to change. Adjust the height on heavy-duty models.

SLOPED DECK

Smooth, sloped deck sheds debris and is easy to clean.



ROTARY CUTTERS | **BrushBull™ Single-spindle**



HEAVY-DUTY GEARBOXES

New, advanced gearbox seal technology is designed for harsh conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.

EASY MAINTENANCE

Greasable Quick-change blade pins are easy to maintain and remove.



QUICK-CHANGE GREASEABLE BLADE SYSTEM

A large blade access window makes it easy to reach our exclusive Quick-change pins and quickly change the blade from the top of the deck.

EXTRA DURABILITY AND HIGHER PERFORMANCE UNDER THE DECK, TOO!



Rear baffle, standard on all models, concentrates the airflow and ensures cut material is distributed evenly.

The large 1/2-inch by 4-inch blades and extra deep deck precisely cut large amounts of material.

A beefier, heavy-duty crossbar and 1/4-inch steel stump jumper protect the undercarriage from extreme conditions.

The frame is built with full-length 3-inch by 3-inch tubes and channels for extra durability.

BB60.30

Shown with optional chain shielding.

HIGH-STRENGTH STEEL

High-strength steel bumper is 2-times thicker than competitive models, with a Z-channel frame for added durability when backing over tough brush.



ROTARY CUTTERS | **BrushBull™ Single-spindle**

TRACTOR PTO HP RANGE: 30 - 150 HP


BB60.50 | 60-inch

BB72.50 | 72-inch

BB84.50 | 84-inch

- Three-point hitch: CAT 1 & 2, CAT 2 & 3.
- Cuts brush up to three inches in diameter.
- Six-year limited gearbox warranty includes the seals.
- High-strength 10 gauge steel deck manufactured for tough conditions.
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Options include round stump jumper, check chains for height adjustments, and dual tailwheel on models BB72.50 and BB84.50.

MODEL	BB60.50	BB72.50	BB84.50
Tractor PTO HP	30 - 150 hp		40 - 150 hp
Hitch Category/Type	CAT 1 & 2 clevis		CAT 2 & 3 clevis
Cutting Width	60"	72"	84"
Total Weight	975 lbs	1125 lbs	1335 lbs
Cutting Capacity Diameter	3"		
Adjustable Cutting Height	2" - 12"		
Transport Width	67.3"	79.3"	91.3"
Overall Length	100"	112"	124"
Tractor PTO Speed	540 rpm		
Quick-hitch Compatible	yes		
Rear Bumper	Z-channel		
Frame & Deck Support	3" x 3" tube		
Deck Construction	smooth top, sloped		
Skid Shoes	full-length, replaceable		
Deck Thickness	10 ga (.135")		
Side Frame Thickness	0.25"		
Side Frame Depth	12.7"		
Gearbox Warranty	6-year limited		
Gearbox HP	150 hp		
Output Shaft Diameter	2"		
Blade Tip Speed	15,525 fpm	15,900 fpm	16,000 fpm
Blade Dimensions	.50" x 4"		
Blade Pin Diameter	1.5"		
Blade Carrier	diamond stump jumper, optional round		
Driveline Protection	slip-clutch		
Options	check chains, round stump jumper	check chains, round stump jumper, dual tailwheel	

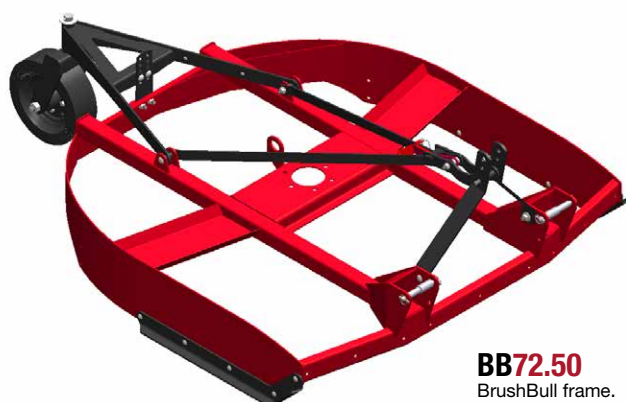

BB72.50
BrushBull frame.

COUNT ON THE INTEGRITY OF THE BRUSHBULL FRAME

- Stress points are tied to full-length 3-inch by 3-inch tubes, not on the deck plate, for added stability.
- A full frame design means strength and durability are built into every BrushBull from the frame out.
- The rear bumper is a Z-shaped channel that's two-times thicker than competitive models, adding structural integrity when backing over brush.

ROTARY CUTTERS | **BrushBull™ Single-spindle**

Put our products to the test in your own backyard. Rugged, dependable and productive – Woods rotary cutters are designed for the extremes of real world use.

TRACTOR PTO HP RANGE: 40 - 210 HP

BB60.60 | 60-inch

BB72.60 | 72-inch

BB84.60 | 84-inch

- Three-point hitch: CAT 1 & 2, CAT 2 & 3.
- Cuts brush and saplings up to four inches in diameter.
- Six-year limited gearbox warranty includes the seals.
- High-strength 10 gauge steel deck is made for extreme conditions.
- Deck is 12.7 inches deep, with half-inch by four-inch blades, and rear baffling that work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Options include round stump jumper and check chains for height adjustments.
- Dual tailwheel is standard on BB72.60 and BB84.60.

MODEL	BB60.60	BB72.60	BB84.60
Tractor PTO HP	40 - 150 hp	50 - 210 hp	65 - 210 hp
Hitch Category/Type	CAT 1 & 2 clevis		CAT 2 & 3 clevis
Cutting Width	60"	72"	84"
Total Weight	1045 lbs	1210 lbs	1440 lbs
Cutting Capacity Diameter	4"		
Adjustable Cutting Height	2" - 12"		
Transport Width	67.3"	79.3"	91.3"
Overall Length	100"	112"	124"
Tractor PTO Speed	540 rpm		
Quick-hitch Compatible	yes		
Rear Bumper	Z-channel		
Frame & Deck Support	3" x 3" tube		
Deck Construction	smooth top, sloped		
Skid Shoes	adjustable height full-length, replaceable		
Deck Thickness	10 ga (.135")		
Side Frame Thickness	0.25"		
Side Frame Depth	12.7"		
Gearbox Warranty	6-year limited		
Gearbox HP	210 hp		
Output Shaft Diameter	3"		
Blade Tip Speed	13,570 fpm	13,945 fpm	14,250 fpm
Blade Dimensions	.50" x 4"		
Blade Pin Diameter	1.5"		
Blade Carrier	diamond stump jumper, optional round		
Driveline Protection	slip-clutch		
Options	check chains, round stump jumper		



BB72.60
Shown with standard chain shielding.

ROTARY CUTTERS | Ditch Bank



DBH6.31

Shown with optional chain shielding.

MODEL	DBH5.31	DBH6.31
Tractor PTO HP Range	60 - 150 hp	
Tractor PTO Speed	540 / 1,000 rpm	
Cutting Width	60"	72"
Cutting Capacity	2" dia	
Adjustable Cutting Height	2" - 10"	
Transport Width	119"	
Side Shift	30"	
Reach: Tractor Center to Outside of Cutter	158"	168"
Overall Length	72"	84"
Flex Range Angles	90° up, 90° down	
Approximate Weight (without hyd oil)	2,000 lbs	2,300 lbs
Tractor Weight Min.	6,000 lbs	
3-point Hitch Lift Capacity Min.	2,500 lbs	
Max HP at Cutting Head	40 hp	
Hitch	CAT 2/3, CAT 2 & 3 QH	
Blades	1/2" x 4"	
Blade Tip Speed at 540 rpm	15,800 fpm	18,900 fpm
Blade Tip Speed at 1000 rpm	16,000 fpm	17,700 fpm
Cutter Deck Thickness	10 ga (0.135")	
Deck Side Depth	9.4"	9.5"
Side Frame Thickness	0.135"	
Shielding	chain standard	
Gauge Wheels	optional	
Tailwheel	optional - frame mounted	
Cooler	optional	
Hydraulic Tank Capacity	35-gallon	

TRACTOR PTO HP RANGE: 60 - 150 HP

DBH5.31 | 60-inch

DBH6.31 | 72-inch

- Highest-rated cutting horsepower in its class – full 40 hp at cutting head.
- Only 6-foot model on the market – Choose 5 foot or 6 foot model.
- Narrow 119" transport width – no frame overhang, even on 6 foot units.
- Fixed counter weight position does not extend beyond width of road lane.
- Cuts at almost any angle with +/- 90° flex (90° up, 90° down).
- Optional hydraulic cooling system for extreme conditions.
- Cuts vegetation up to 2 inches in diameter.
- Patented Quick-change blade system allows easy blade changes from top of the deck.
- Quick-hitch ready.

The all-new and improved hydraulic-drive Woods Ditch Bank Rotary Cutter is a rugged and versatile tool, precision-engineered for maintaining ditches, roadways, ponds and waterways.

ROTARY CUTTERS | Multi-spindle

Durable and easy-to-use cutters for both brush cutting and crop shredding.

**DS10.50**

EASY TO USE

The proven leader in the cutter business delivers a full line of easy-to-use standard- and heavy-duty rotary cutters loaded with features for every application.

- You'll cross steep inclines and ditches with ease as the floating hitch keeps the weight off the cutter.
- Switch cutting blades quickly and you'll be up and running in no time due to the large blade access window and the exclusive Woods patented Quick-change blade pin system.
- Change over to row crop applications in an instant with quick-adjust variable wheel spacing.

HARD TO BREAK

You'll rely on your Woods rotary cutter for years because we still manufacture them with the same dependable quality that we've delivered since 1946.

- Woods gearboxes feature heat-treated, alloy steel gears that stand up to the demands of rotary cutting.
- Sloped-top decks shed water and debris to prevent rust and corrosion and wrap around a heavy steel super-structure.
- Spring cushion axles reduce stress spikes to keep your Woods rotary cutter delivering high-performance cutting.
- Factory-balanced stump jumpers are a standard feature that help you avoid hazards and save blades from wear and tear*.

* N/A on DS8.30 and DS10.40

ROTARY CUTTERS | Multi-spindle

Durable and easy-to-use cutters for both brush cutting and crop shredding.

30- AND 40-SERIES MULTI-SPINDLE

TRACTOR PTO HP RANGE: 35 - 75 HP

DS8.30 | 96-inch, pull-type

MDS8.30 | 96-inch, 3-point mounted

TRACTOR PTO HP RANGE: 40 - 120 HP

DS10.40 | 120-inch, pull-type


MDS10.40 | 120-inch, 3-point mounted

- Cuts light brush up to 1.5-inches (30-series) to 2-inches (40-series) in diameter.
- Six-year limited gearbox warranty.



DS8.30
Shown with
chain shielding.

SLOPED TOP DECK
Smooth, sloped deck sheds water and debris
to prevent rust and corrosion.

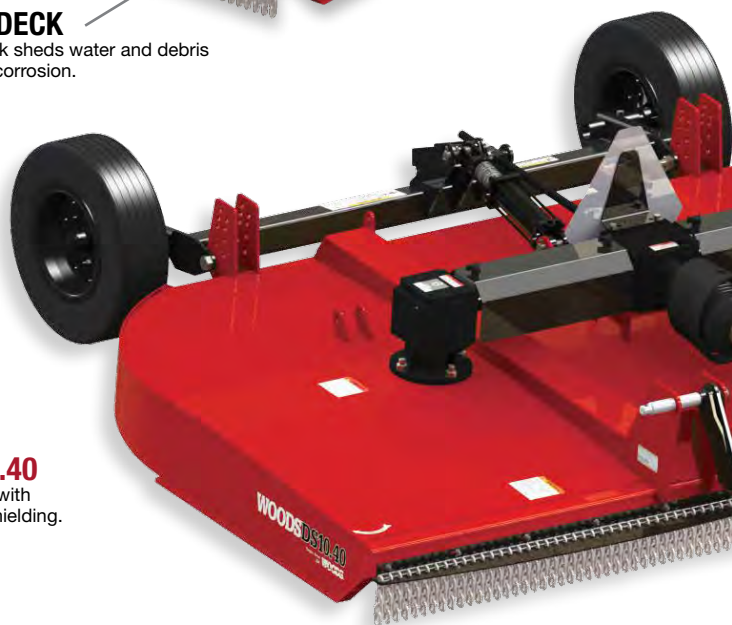

DS10.40
Shown with
chain shielding.


CV DRIVE
Less maintenance, smoother operation.

ROTARY CUTTERS | Multi-spindle



DS8.30

Shown with chain shielding.

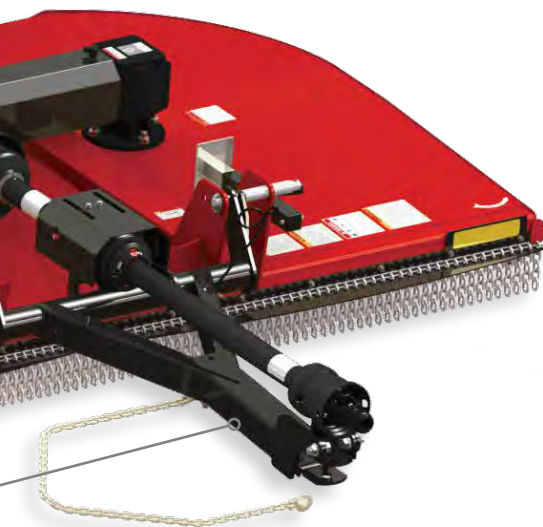

MODEL	DS8.30 (pull-type) MDS8.30 (three-point mounted)	DS10.40 (pull-type) MDS10.40 (three-point mounted)
Minimum Tractor PTO HP	35 hp pull-type, 45 hp mounted	40 hp pull-type, 60 hp mounted
Hitch Category / Type	pull-type: pivoting clevis mounted: CAT 1 or 2 / clevis	pull-type: pivoting clevis mounted: CAT 2 or 3 / clevis
Cutting Width	96"	120"
Adjustable Cutting Height	2" - 12"	
Cutting Capacity	1.5" dia	2" dia
Gearbox HP Rating	100 hp center, 75 hp spindle	120 hp center, 90 hp spindle
Blade Tip Speed	15,200 fpm	16,700 fpm
Deck Side Depth	10"	
Deck Thickness	10 ga. (.135")	
Overall Width	100"	124"
Overall Length	pull-type: 142" (25" tires) mounted: 96"	pull-type: 155" (25" tires) mounted: 110"
Approximate Weight	pull-type: 1,467 lbs mounted: 1,213 lbs	pull-type: 1,847 lbs mounted: 1,576 lbs
Blade Dimensions	.5" x 4"	
Wheel Selection	laminated, severe duty new ag, foam filled new ag, 15" rims	
Optional Dual Wheels - Pull-Type	no	
Quick-hitch Ready	yes	
Gearbox Warranty	6 years	

ROTARY CUTTERS | Multi-spindle

50-SERIES MULTI-SPINDLE

TRACTOR PTO HP RANGE: 40 - 200 HP

DS8.50 | 96-inch, pull-type

MDS8.50 | 96-inch, 3-point mounted

DS10.50 | 120-inch, pull-type

MDS10.50 | 120-inch, 3-point mounted

- Cuts brush up to 3 inches in diameter.
- Variable wheel spacing.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.

TUBULAR FRONT FRAME

Greater strength and rigidity for towing.

QUICK-CHANGE BLADE PINS

Easy to replace Quick-change blade pins under the deck reduce downtime.

HYDRAULICALLY ADJUSTABLE TAILWHEEL

Hydraulic tailwheel offers a variable cutting range.



DS8.50

Shown with chain shielding.

MODEL	DS8.50 (pull-type) MDS8.50 (three-point mounted)	DS10.50 (pull-type) MDS10.50 (three-point mounted)
Minimum Tractor PTO HP	40 hp pull-type 55 hp mounted	50 hp pull, 65 hp mounted
Hitch Category / Type	pull-type: pivoting clevis mounted: CAT 2 or 3 / clevis	
Cutting Width	96"	120"
Adjustable Cutting Height	2" - 12"	
Cutting Capacity	3" dia	
Gearbox HP Rating	205 hp center, 160 hp spindle	
Blade Tip Speed	540 rpm / 14,886 fpm	540 rpm / 15,974 fpm, 1000 rpm / 16,232 fpm (MDS)
Deck Side Depth	13"	
Deck Thickness	10 ga. (.135")	
Overall Width	103"	127"
Overall Length	pull-type: 150" (25" tires) mounted: 99"	pull-type: 162" mounted: 111"
Approximate Weight	pull-type: 2,238 lbs mounted: 2,069 lbs	pull-type: 2,537 lbs mounted: 2,373 lbs
Blade Dimensions	.5" x 4"	
Wheel Selection	laminated, severe duty new ag, foam filled new ag, 15" rims, used aircraft	
Optional Dual Wheels - Pull-Type	yes	
Quick-hitch Ready	yes	
Gearbox Warranty	6 years	

ROTARY CUTTERS | Offset Multi-spindle

Woods' offset models reach far under canopies on either side of the tractor.



DS08.50


Shown with
chain shielding.

MODEL	DS08.50	DS010.50
Minimum Tractor PTO HP	semi-mounted: 40 hp	semi-mounted: 50 hp
Hitch Category/Type	CAT 2 or 3 / clevis	
Hydraulic Variable Offset	21" to the right, 5" to the left	27" to the right, 5" to the left
Cutting Width	96"	120"
Adjustable Cutting Height	2" - 12"	
Cutting Capacity	3" dia	
Gearbox HP Rating	205 hp center, 160 hp blade spindle	205 hp splitter; 160 hp blade spindle
Gearbox Warranty	6 years	
Blade Tip Speed	540 rpm / 14,886 fpm	540 rpm / 15,974 fpm
Deck Side Depth	13"	
Deck Thickness	10 ga. (.135")	
Overall Width	103"	127"
Overall Length	122"	128"
Approximate Weight	2,335 lbs	2,510 lbs
Blade Dimensions	.5" x 4"	
Wheel Selection	21" laminated	

ROTARY CUTTERS | **Offset Multi-spindle**

Woods' rugged and powerful 50-series offset models are ideal for orchards, tree-lined fields and any setting with overhangs.

HYDRAULIC VARIABLE OFFSET

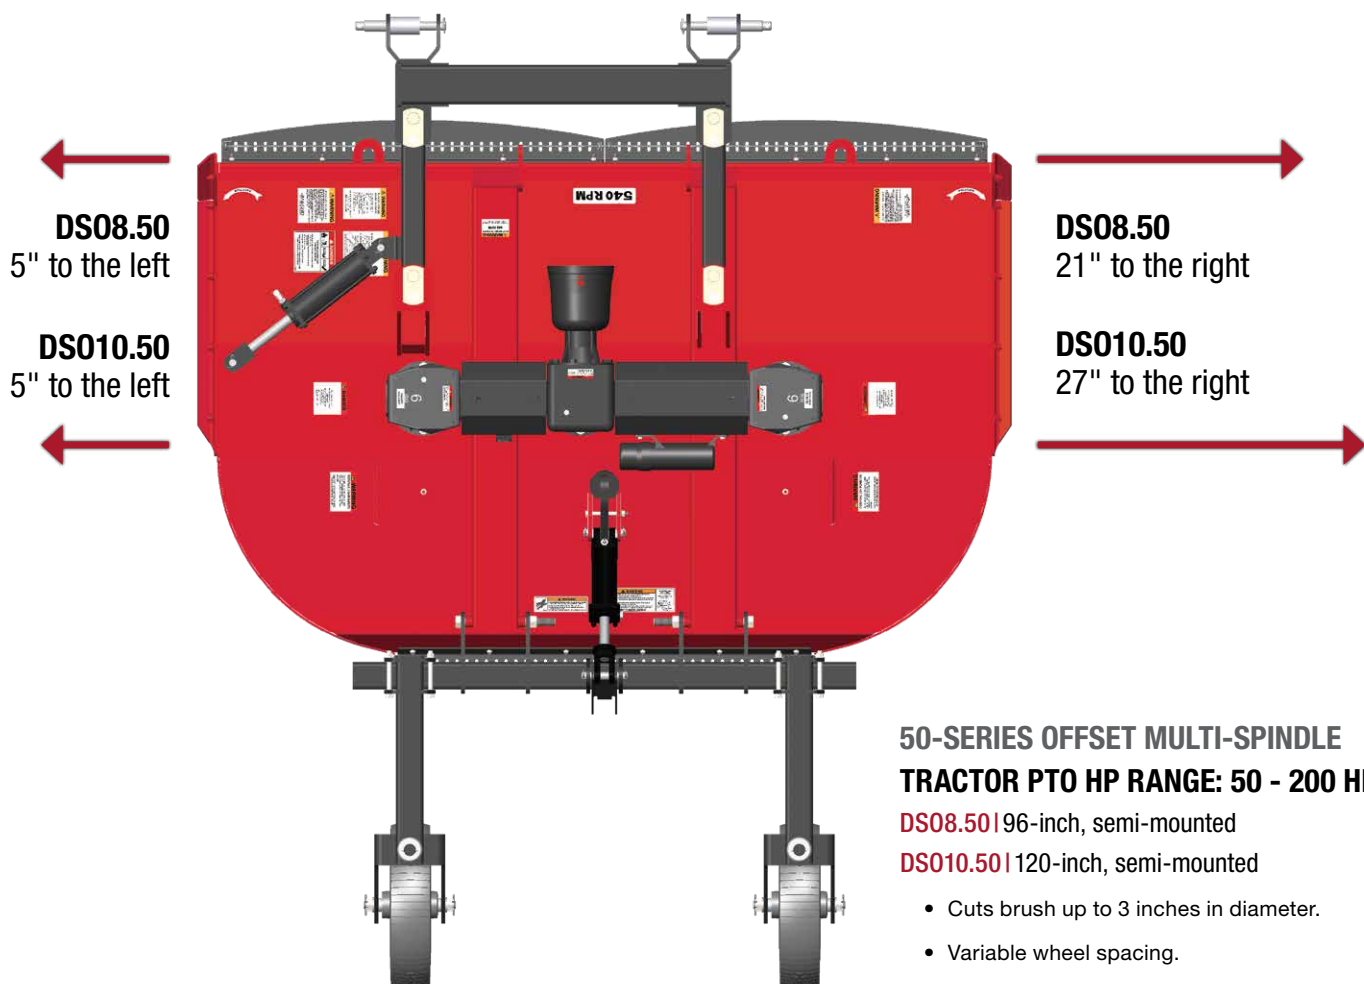

50-SERIES OFFSET MULTI-SPINDLE TRACTOR PTO HP RANGE: 50 - 200 HP

DS08.50 | 96-inch, semi-mounted

DS010.50 | 120-inch, semi-mounted

- Cuts brush up to 3 inches in diameter.
- Variable wheel spacing.
- DS08.50 hydraulic variable offset 21 inches to the right or 5 inches left.
- DS010.50 hydraulic variable offset 27 inches to the right or 5 inches left.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.



FINISH MOWERS



DISCOVER THE PREMIUM CUT QUALITY THAT MAKES WOODS
THE UNDISPUTED LEADER IN FINISH MOWERS.

- Designed for 15 - 80 horsepower tractors.
- High performance gearboxes require less maintenance.
- Industrial quality, reinforced blade spindle is designed for years of service.

DISCOVER THE PREMIUM CUT QUALITY THAT MAKES WOODS THE UNDISPUTED LEADER IN FINISH MOWERS.

DESIGNED FOR SPEED

Woods finish mowers help you maintain a beautiful lawn in less time. You'll look forward to using and maintaining your equipment with features that focus on your drive to get more done.

- Our mower designs provide improved cut quality at higher mowing speeds, enhancing productivity for less time on the job.
- Spring-loaded idler arms automatically maintain the correct tension on our strong custom-made belts, providing optimum run time.

PRECISION AND QUALITY

For those who demand a professionally groomed lawn, Woods high-performance finish mowers ensure a clean, crisp, manicured appearance year after year.

- The combination of a deep deck, baffling and unique rear discharge design ensures exceptional material distribution and gives you the premium results that make the Woods name synonymous with "cut quality".
- Manufactured exclusively to Woods' superior standards, heat-treated, alloy steel blades provide maximum performance and precision cutting in applications such as large lawns, parks and sporting fields.
- A convenient driveline holder and quick-hitch readiness from the factory make attachment to your tractor a breeze.



TKP72.40
Shown with optional
chain shielding.

FINISH MOWERS | TurfKeeper™

TIME TO GET EVEN

EVEN CUT. EVEN DISTRIBUTION. EVEN COSTS LESS TO OWN.



TURFKEEPER™


Introducing the new rear-mount finish mowers from Woods, the TurfKeeper™, designed to deliver outstanding cut quality at a lower cost of ownership.




3-year Gearbox Warranty
Confidence in the durability of your Woods mower.



1-year Spindle Warranty
Lubed for life spindles with one year warranty provide ease of mind.



Driveline Holder
Keep the drive out of the dirt, even when attaching.




Easy Shield Removal
No tools needed to access belt sheaves, belt, spring-loaded idler.



Cast Iron Sheaves
Better belt grip for extended belt life.



Serviceable Belt Idler
Replaceable idler post and bronze bushing.



Optional Chain Shielding
Helps prevent discharge of foreign objects.



Optional Front Roller
Anti-scalp protection for uneven terrain.



Quick-hitch Ready
CAT 1 quick-hitch compatible as shipped.

FINISH MOWERS | TurfKeeper™



3-YEAR GEARBOX WARRANTY

Confidence in the durability of your Woods mower.


DRIVELINE HOLDER

Keep the drive out of the dirt, even when attaching.



1-YEAR SPINDLE WARRANTY

Lubed for life spindles with one year warranty provide ease of mind.

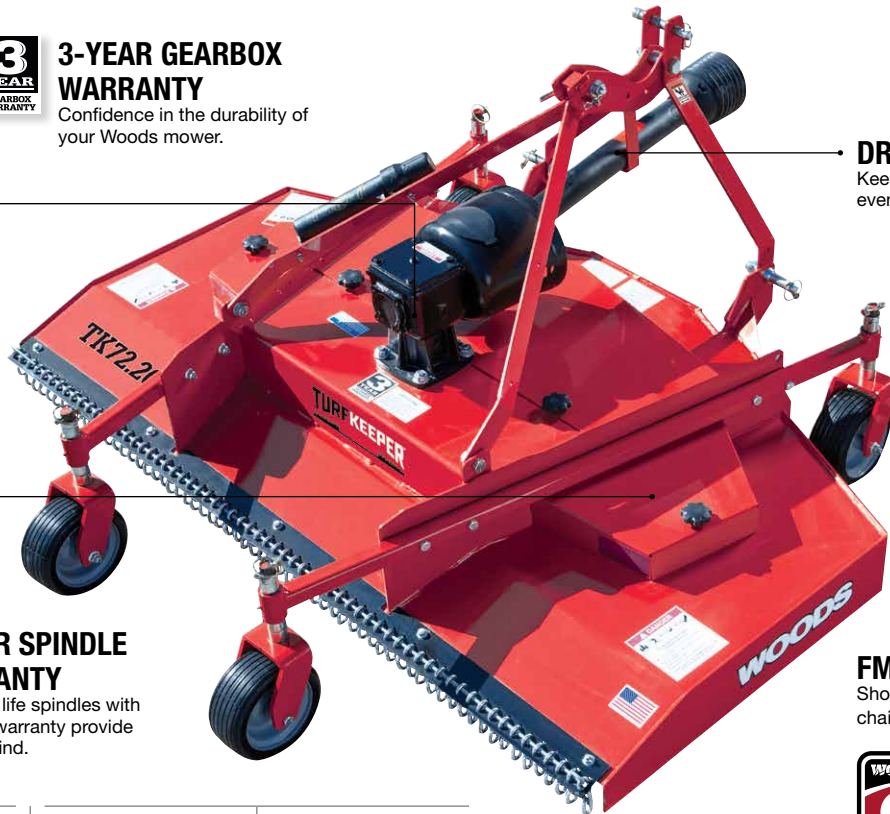

FM72.20

Shown with optional chain shielding.



NEW
2021

TRACTOR PTO HP RANGE: 15 - 35 HP

TK60.20 | 60-inch cutting width

TK72.20 | 72-inch cutting width

- High-lift blades for best in class lifting and cutting of green material for evenness of cut.
- Parallel frame deck sides spread material from edge to edge for even material distribution.
- High blade tip speeds enhance productivity with improved mowing at higher speeds for less time on the job.
- Hitch: Limited CAT 1 (TK60.20) and CAT 1 (TK60.20 & TK72.20)

* NOTE: All TurfKeeper™ finish mower models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

MODEL	TK60.20	TK72.20
Tractor PTO HP Range	15 - 35 hp	20 - 35 hp
Hitch/Quick-hitch Ready	Limited CAT 1 & CAT 1 / yes	CAT 1 / yes
Cutting Width	60"	72"
Weight	480 lbs	540 lbs
Adjustable Cutting Height)	1.5" - 5"	
Overall Width	61"	73"
Deck Material Thickness	10 gauge	
Side skirt	7 gauge x 4.8" deep	
Gearbox HP Rating	35 hp	
Blade Tip Speed	17,900 fpm	18,000 fpm
Blade Overlap	1.25"	
Blade Spindles/Bearings	3 cast iron housings/ greasable ball bearings	
Spindle Maintenance	lubed-for-life	
Tractor PTO Speed	540 rpm	
Driveline Size	CAT 2	
Belt	B-section Kevlar®	
Belt Adjustment	spring-loaded idler	
Cutting Area Shielding	chain shielding (optional)	
Mower Warranty	1 year residential or 90 days commercial	
Gearbox Warranty (limited)	3 year homeowners, 1 year commercial	

FINISH MOWERS | TurfKeeper Pro™

TIME TO GET EVEN LIKE A PRO

EVEN CUT. EVEN DISTRIBUTION. EVEN COSTS LESS TO OWN.

NEW
2021



TURFKEEPER
PRO

TurfKeeper Pro™ is packed with features including a deep high-grade steel deck, premium caster wheels, and heavy-duty construction to meet the demands of even the toughest commercial applications.

Re-designed under deck baffling, a floating lower hitch, high-lift blades, and parallel side frames create an extremely even cut and even distribution of cut material...even when mowing at higher speeds. For ease of attachment, TurfKeeper Pro comes with a convenient driveline holder and is quick-hitch ready from the factory, without the need for additional hardware.

Combine all these great features with our 6-year gearbox warranty and 3-year spindle warranty, and you'll have complete confidence that the TurfKeeper Pro is one of the most rugged, best performing, and easiest to use finish mowers available.



6-year Gearbox Warranty
Confidence in the durability of your Woods mower.



3-year Spindle Warranty
Ductile iron blade spindles with triple ball bearings and three-year warranty.



Driveline Holder
Keep the drive out of the dirt, even when attaching.




Easy Shield Removal
No tools needed to access belt sheaves, belt, spring-loaded idler.



Cast-iron Sheaves
Better belt grip for extended belt life.



Spring-loaded Belt Tensioner
Replaceable ball bearing pivot for smooth operation.



Optional Chain Shielding
Helps prevent discharge of foreign objects.



Optional Front Roller
Anti-scalp protection for uneven terrain.



Quick-Hitch Ready
CAT 1 quick-hitch ready at purchase.



FINISH MOWERS | **TurfKeeper Pro™**

TRACTOR PTO HP RANGE: 15 - 50 HP

TKP60.40 | 60-inch cutting width

TKP72.40 | 72-inch cutting width

TKP84.40 | 84-inch cutting width

- Heavy duty construction provides maximum durability.
- Strong, 7 gauge steel deck and a powerful 60 hp gearbox.
- Uniquely designed for best-in-class cut quality.
- Floating lower hitch helps to follow ground contours for a smooth, even cut.
- Easy shield removal-no tools necessary.



NEW
2021

EASE OF ATTACHMENT

Quick-hitch ready from the factory for ease of attachment.



DURABILITY

Premium, solid rubber caster wheels for performance and durability.

TKP72.40

Shown with optional chain shielding.

- Deep deck and high blade tip speeds help you get the job done faster.
- Optional chain shielding attaches and detaches easily.
- Ideal for mowing large lawns, sports fields and parks.
- Superior baffle design distributes material more evenly.

TURFKEEPER PRO DELIVERS BEST-IN-CLASS CUT QUALITY AT A LOWER COST OF OWNERSHIP.

IT'S TIME TO GET EVEN WITH YOUR GRASS - LIKE A PRO!

MODEL	TKP60.40	TKP72.40	TKP84.40
Tractor PTO HP Range	15 - 50 hp	20 - 50 hp	25 - 50 hp
Product Weight	617 lbs	686 lbs	790 lbs
Shipping Weight	710 lbs	779 lbs	898 lbs
Hitch	CAT 1 & Ltd CAT 1	CAT 1	
Quick-hitch Ready	yes		
Floating Lower Hitch	yes		
Cutting Width	60"	72"	84"
Overall Width	61"	73"	85"
Adjustable Cut Height	1.5" - 5.0"		
Gearbox HP Rating	60		
Driveline Category	CAT 3		
Spindle Housing	ductile iron		
Spindle Bearings	triple ball bearings		
Greasable Spindle	yes		
Spindle Sheave Type	cast-iron		
Belt	B-section Aramid		
Belt Adjustment	spring-loaded w/ bearing pivot		
Blade Size	1/4" x 2-1/2" x 21"	1/4" x 2-1/2" x 25"	5/16" x 2-1/2" x 29"
Blade Overlap	1.5"		
Blade Tip Speed	18,000 fpm	18,100 fpm	
Deck Thickness	7 gauge		
Deck Depth	5.38"		
Caster Wheels	4" x 10" solid		

FINISH MOWERS | RD990X

SIX-YEAR GEARBOX WARRANTY

With twice the oil capacity of many competitors and an improved breather system that maintains oil lubrication of gears, RD990X gearboxes carry a 6-year limited warranty to ensure years of worry-free performance.



RD990X
Shown with standard chain shielding.

TAPERED ROLLER BEARINGS

Tapered roller bearings in caster wheels provide superior performance and longevity in rough conditions.

REPLACEABLE SIDE SKIDS

Replaceable side skirts attach to heavy side frames for durability and long life.

MODEL	RD990X
Tractor PTO HP Range	45 - 75 hp
Hitch/Quick-hitch Compatible	CAT 1 & 2 / yes
Cutting Width	90"
Weight	1,333 lbs
Adjustable Cutting Height	1.5"-7"
Overall Width	97"
Deck Material Thickness	7 gauge
Side Skirt	.31" x 8.5" with skid shoes
Gearbox HP Rating	75 hp
Blade Tip Speed	17,000 fpm
Blade Overlap	2"
Blade Spindles/Bearings	3 cast iron housings / greasable tapered roller bearings
Tractor PTO Speed	540 rpm
Driveline Size	CAT 4
Belt	powerband w/double B-section
Belt Adjustment	spring-loaded idler
Cutting Area Shielding	chain shielding
Mower Warranty	1 year
Gearbox Warranty (limited)	6 years
Spindle Warranty (limited)	3 years

TRACTOR PTO HP RANGE: 45 - 75 HP

RD990X | 90-inch cutting width

The Woods RD990X rear discharge finish mower is tough yet versatile enough to move from rough, weedy farmland to commercial lawns and landscapes.

- Three-point hitch: CAT 1 and 2.
- Blade tip speed: 17,000 fpm.
- Takes down grass and light weeds, and leaves a high grade finish cut behind.
- Features our patented Quick-change blade system, an extra strong double B-section belt and anti-wrap bars that prevent damage caused by material wrapped around lower spindle.
- Deep deck, swinging blades and stump jumper are ideal for rough conditions.
- Floating lower hitch points allow the mower to follow uneven terrain.



FINISH MOWERS | Turf Batwing®

Our flexible wing finish mowers deliver Woods proven cutting deck in a three-gang configuration.

TRACTOR PTO HP RANGE: 25 - 60 HP ESTATE MODEL

TBW150C | 12.5-foot cutting width

- Three-point hitch: CAT 3.
- Blade tip speed: 16,200 fpm.
- Three decks mounted to heavy-duty trailer for triple cut capacity; mow up to seven acres per hour at five miles per hour.

TRACTOR PTO HP RANGE: 30 - 80 HP COMMERCIAL MODELS

TBW144 | 12-foot cutting width

TBW180 | 15-foot cutting width

TBW204 | 17-foot cutting width

- Blade tip speeds: 18,000 fpm.
- Tapered roller bearings in wheels and blade spindles.
- Carrier bearing on the input driveline provides support, making it easier to attach to the tractor and allow tighter turns.
- Standard six-year gearbox limited warranty and three-year spindle warranty.
- Options include mulching kits on TBW180 and TBW204, highway light kit and anti-scalp roller kits on all three models.

- Superior cutting capabilities are combined with contoured wing decks to let you quickly cut large, uneven areas of turf without sacrificing cut quality.
- Rounded front, tapered rear deck design allows mowing close to objects without damage.
- Round skid rod glides deck bottom over roots and uneven turf — adding strength to the deck skirt.

MODEL
Tractor PTO HP Range
Input Driveline
Wing Drivelines
Cutting Width
Adjustable Cutting Height
Wing Deck Cutting Width
Deck Overlap
Overall Width
Transport Width
Maximum Overall Length
Transport Length
Splitter Gearbox HP
Blade Tip Speed
Drive Type
Transport Tires
Caster Wheel Bearings
Caster Wheels
Deck Thickness
Wing Deck Lift Cylinders
Center Deck Lift Cylinders
Trailer Frame Construction
Hitch Adjustment
Blade Spindles Bearings
Blade Dimensions
Blade Spindles
Cutting Height Adjustment
Belts
Belt Adjustment
Chain Shielding

TBW150C	TBW144	TBW180	TBW204
25 - 60 hp	30 - 80 hp	35 - 80 hp	40 - 80 hp
CAT 3 (constant velocity)	CAT 4 (constant velocity)		
CAT 3			
12.5'	12'	15'	17'
1" - 4.5"	1" - 5"		
54"	48.5"	60"	72"
6.15"	6.5"	6"	6"
151"	146"	182"	206"
93"	96"	100"	114"
135"	173"	183"	
126"	158"	161"	
100 hp			
16,200 fpm	18,000 fpm		
gearbox over v-belt			
(2) 20" x 8"	(2) 20.5" x 8"		
power metal bushing	tapered roller bearings		
(10) 10" x 4" solid	(10) 15" x 6" pneumatic	(10) 18" x 9.5" pneumatic	
10 gauge steel plate	8 gauge		
3" x 10" single acting	3.5" x 10" single acting		
3" x 8" single acting			
.25" wall tubing			
floating clevis, multi-position			
greasable ball bearings	greasable tapered roller		
(9) .25" x 2.5"	(9) .25" x 2.5"		
(9) cast iron	(9) cast iron		
spacer on caster			
B-section, Kevlar			
spring-loaded idler			
optional	standard		



TBW180

SNOW BLOWERS



MAKE QUICK WORK OF MOVING ALL TYPES OF SNOW – POWDER, CRUSTED, ICY OR WET.

TRACTOR PTO HP RANGE: 15 - 60 HP

SB54S | Tractor HP range: 15–25 hp

SB64S | Tractor HP range: 15–35 hp

SB74C | Tractor HP range: 30–50 hp

SB84C | Tractor HP range: 35–60 hp

- Designed specifically for sub-compact and compact tractors.
- Move large amounts of snow in a short time with working widths from 54 to 84 inches.
- Get more throwing force with less horsepower than single-stage snow blowers with Woods' two-stage design.
- Reinforced steel side plates offer exceptional durability.
- Make quick and easy adjustments using the optional hydraulic or electric chute rotator.



MODEL
Tractor PTO HP Range
Tractor PTO Speed
Hitch (All models are ASABE Quick-hitch Compatible)
Working Width
Transport Width
Working Height
Approximate Weight
Driveline
Driveline Protection
Drive Type–Fan
Drive Type–Auger
Number of Feeder Augers
Auger Flighting
Chute Rotation
Hydraulic Chute Rotator
Fan Diameter
Fan Depth
Replaceable Skids
Adjustable Skids
Replaceable Cutting Edge
Telescoping Three-point Hitch

SB54S	SB64S	SB74C	SB84C
15 - 25 hp	15 - 35 hp	30 - 50 hp	35 - 60 hp
540 rpm			
CAT 1		CAT 1 & 2	
54"	64"	74"	84"
56"	66"	76"	86"
24"		26"	
415 lbs	436 lbs	592 lbs	632 lbs
CAT 3			
shear bolt			
gearbox			
gearbox & chain			
1			
.31" x 2"			
270°			
optional			
22"		24"	
6"		8"	
yes			
yes			
welded			
no			

LANDSCAPE EQUIPMENT



WOODS LANDSCAPE EQUIPMENT

Whether your landscape projects are contained in your own backyard or the way you make your living, you want equipment that's easy to use, easy to maintain and built to last. That's what Woods delivers.

We build a full line of tools to tackle a variety of projects, such as putting in a new garden, reshaping a driveway or seeding a lawn. We'll help you get the most out of the investment you've made in your tractor. And, at the end of the day, we'll help you feel good about all the chores you checked off your list.

Pull it all together and you've got Woods Power — power to be more productive.

A FULL LINE OF TOOLS TO TACKLE A VARIETY OF YARD AND GARDEN PROJECTS.

BOX SCRAPERS are designed with exceptional strength and versatility to move large amounts of material; the tough, reversible cutting edge leaves a level finish.

GRADING SCRAPERS are ideal for leveling dirt and gravel in driveways, lawns and fields.

REAR BLADES move dirt, grade driveways and clear snow.

LANDSCAPE RAKES are strong, yet versatile, for both tough clean-up jobs and fine raking.

POST HOLE DIGGERS power through a variety of soil conditions and projects, like planting trees and shrubs or installing deck or fence posts.

Quick Hitch

Woods Quick Hitch makes easy work of changing from one 3-point attachment to another. When hooking up to many implements, you never have to leave the tractor because lower hooks automatically lock implement into place.

- Heavy-duty steel construction with adjustable top link bracket.
- Seven-eighths-inch mounting pins and adapter bushings.
- Lower arms lock automatically.
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch compatibility.



TQH1



MODEL	TQH1	TQH2
Tractor Hitch	CAT 1	CAT 2
Width	27.25"	
Approximate Weight	75 lbs	
Mounting Pin Diameter	.875"	
Adapter Bushing Diameter	1.25"	

LANDSCAPE EQUIPMENT | **Box Scrapers**

TRACTOR PTO HP RANGE: UP TO 45 HP

- GBC48 | 48-inch
- BSS54 | 54-inch
- BSS60 | 60-inch
- BSS65 | 65-inch
- BSS72 | 72-inch

- Three-point hitch: Limited 1 and 1.
- Designed for sub-compact and compact tractors.
- Hardened scarifier teeth with replaceable tips.
- Reversible/replaceable high-carbon cutting edges.



TRACTOR PTO HP RANGE: 40 - 65 HP

- BSM72 | 72-inch
- BSM84 | 84-inch

BSS72

- Three-point hitch: CAT 1 and 2.
- End plates: .5-inch– 33% heavier end plates than our BSS models.
- One-quarter-inch plate welded inside of end plates to increase life.
- Optional floating, hinged tailgate to provide maximum downforce on cutting edge.

MODEL	GBC48	BSS54	BSS60	BSS65	BSS72	BSM72	BSM84
Tractor Engine HP Range	up to 25 hp	up to 45 hp				40 - 65 hp	
Tractor Hitch	Ltd 1 & 1	CAT 1				CAT 1 & 2	
Working Width	48"	54"	60"	65"	72"	72"	84"
Capacity	6.8' cubic	10.3' cubic	11.5' cubic	12.5' cubic	13.8' cubic	13.8' cubic	16.2' cubic
Approximate Weight	285 lbs	486 lbs	514 lbs	528 lbs	551 lbs	680 lbs	750 lbs
Scarifier Depth	0" - 1.5"		0", 1.5" or 3" adjustable				
Number of Scarifiers	4	4	5	5	6	6	7
Tailgate Type	fixed					fixed, floating optional	
Reversible Cutting Edge (qty/size)	(2) 0.5" x 6"						

LANDSCAPE EQUIPMENT | Grading Scrapers



Ideal for leveling, from filling driveway potholes to removing a soil berm. Woods grading scrapers are designed to handle more material in fewer passes.

- Heavy-duty mast plates create more downforce for smoother surface and virtually eliminates washboard effect.
- Adjustable skid shoes and scarifiers increase performance.
- Tall side frames hold more material.
- Approachable leading edges and structural reinforcements keep scraper stronger for longer.
- Reversible/replaceable high-carbon cutting edges.


GSS72P
GSS54P

TRACTOR PTO HP RANGE: 15 - 45 HP

GSS54P | 53-inch

GSS60P | 59-inch

GSS72P | 71-inch



- Three-point hitch: Limited CAT 1 and 1.
- Fourteen- and sixteen-inch box heights.

TRACTOR PTO HP RANGE: 30 - 65 HP

GSM84P | 83-inch

GSM96P | 95-inch

- Three-point hitch: CAT 1 and 2.
- Sixteen-inch box height — one of the tallest in the industry.

MODEL	GSS54P	GSS60P	GSS72P	GSM84P	GSM96P
Tractor Engine HP Range	15 - 30 hp	20 - 45 hp		30 - 65 hp	
Hitch Category	Limited CAT 1 & 1	CAT 1		CAT 1 & 2	
Working Width	53"	59"	71"	83"	95"
Overall Width	58"	64"	76"	88"	100"
Overall Length	42"	46"			
Box Height	14"	16"			
Weight	409 lbs	553 lbs	655 lbs	754 lbs	802 lbs
Number of Scarifiers	4		5	6	
Reversible Cutting Edge (qty/size)	(2) 0.5" x 6"				
Scarifier Adjustments	-4.0, -2.5, -1.0, +1.0	-2.5, -1.0, +0.5, +2.5			
Skid Shoe Adjustment	-0.75 to +0.75	-1.0 to +0.5			
Lower Hitch Design	clevis				

LANDSCAPE EQUIPMENT | Rear Blades

Ideal for grading dirt or gravel, cleaning up construction sites and moving snow.

TRACTOR HP RANGE: UP TO 45 HP

RBS54 | 53-inch **RBS60P** | 59-inch
RBS60 | 59-inch **RBS72P** | 71-inch
RBS72 | 71-inch **RBS84P** | 83-inch

- Formed moldboard made from high-strength steel provides exceptional rigidity and pivots 360°.
- Double-beveled, reversible, bolt-on cutting edge adds to product life and enables easy replacement.
- Optional skid shoes for depth control, and optional parking stand for easier attachment.



TRACTOR HP RANGE: 30 - 65 HP 50 - SERIES REAR BLADES

RB72.50 | 71-inch
RB84.50 | 83-inch
RB96.50 | 95-inch

- Seventeen-inch high, 1/4-inch thick moldboard.
- Double-beveled, reversible and hardened cutting edge for long life.
- Fully manual offers angle, offset and tilt adjustments.
- Optional end plates, skid shoes and hydraulic angle kit (includes relief valve).
- Convenient parking stand is standard.



RB72.50

LANDSCAPE EQUIPMENT | Rear Blades



RBS84P

Shown with optional parking stand.

MODEL	RBS54	RBS60	RBS72	RBS60P	RBS72P	RBS84P	RB72.50	RB84.50	RB96.50
Tractor Engine HP	up to 30 hp			20 - 45 hp			30 - 65 hp		
Tractor Hitch	Limited CAT 1 & 1			CAT 1			CAT 1 & 2		
Working Width	53"	59"	71 "	59"	71 "	83"	71 "	83"	95"
Moldboard Height	12"			15"			17"		
Moldboard Thickness	0.182" (grade 80 steel)			0.25" (grade 80 steel)			0.25" (grade 80 steel)		
Weight	134 lbs	142 lbs	156 lbs	268 lbs	288 lbs	308 lbs	455 lbs	475 lbs	495 lbs
Double-beveled, Reversible Cutting Edge Dimensions	0.375" x 6"			0.5" x 6"			0.5" x 6"		
Angle Adjustments	5 positions up to 30°						7 positions up to 45° (mech or hyd)		
Offset Adjustments	—	—	—	up to 12" left or right			6", 12", 18" left or right		
Tilt Adjustments	—	—	—	up to 15°			5 positions up to 23°		
End Plates	—	—	—	optional			optional		
Skid Shoes	optional						optional		
Tailwheel	—	—	—	—	—	—	—		
Parking Stand	optional						standard		
ASABE Quick-hitch Compatible	yes						yes		

LANDSCAPE EQUIPMENT | Rear Blades



TRACTOR HP RANGE: 40 - 85 HP 60 - SERIES REAR BLADES

RB84.60 | 83-inch

RB96.60 | 95-inch

- Seventeen and a half-inch high, 5/16-inch thick moldboard.
- Double-beveled, reversible and hardened cutting edge for long life.
- Choose manual or hydraulic, featuring angle, offset and tilt adjustments.
- Optional end plates, skid shoes, tailwheel and selector valve.
- Convenient parking stand is standard.

TRACTOR HP RANGE: 50 - 100 HP

RB850 | 95-inch

RB1010 | 119-inch

- Three-point hitch: CAT 2 and 3.
- Available as fully hydraulic, fully manual or combination cylinder options.
- Fully hydraulic models allow precise blade and material control (angle, tilt, and offset).
- Tough, dozer - type full box construction.

LANDSCAPE EQUIPMENT | Rear Blades



RB96.60


Shown with optional hydraulic adjustment and selector valve.

MODEL	RB84.60	RB96.60	RB850	RB1010
Tractor Engine HP	40 - 85 hp		50 - 100 hp	80 - 150 hp
Tractor Hitch	CAT 1 & 2		CAT 2	CAT 2 & 3
Working Width	83"	95"	95"	119"
Moldboard Height	17.5"		17"	18"
Moldboard Thickness	0.313"		0.313"	0.25"
Weight	705 lbs	730 lbs	1,233 lbs	1,535 lbs
Double-beveled, Reversible Cutting Edge Dimensions	0.5" x 6"		0.5" x 6"	
Angle Adjustments	up to 45° (mech or hyd)		9 forward up to 60°; 5 reverse up to 30° (mech or hyd)	up to 60° (hyd)
Offset Adjustments	up to 20" (mech or hyd)		up to 24" (mech or hyd)	up to 33" (mech or hyd)
Tilt Adjustments	up to 23° (mech or hyd)		up to 30° (mech or hyd)	up to 28° (mech or hyd)
End Plates	optional		optional	—
Skid Shoes	optional		optional	—
Tailwheel	optional		optional	
Parking Stand	standard		standard	
ASABE Quick-hitch Compatible	yes		yes	

LANDSCAPE EQUIPMENT | **Landscape Rakes**



WOODS LANDSCAPE RAKES ARE BUILT WITH RUGGED DURABILITY FOR TOUGH CLEAN-UP JOBS, AS WELL AS FINE RAKING FEATURES FOR LIGHT-DUTY LAWN CARE AND GENERAL MAINTENANCE.

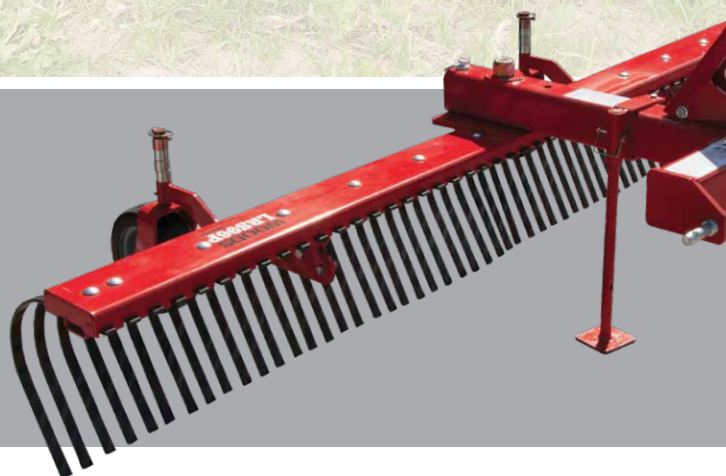

IDEAL FOR LAWN MAINTENANCE PROJECTS AND CLEARING DEBRIS AT CONSTRUCTION SITES.

TRACTOR PTO HP RANGE: UP TO 30 HP

LRS52 | 52-inch

LRS60 | 60-inch

LRS72 | 72-inch

TRACTOR PTO HP RANGE: 20 - 45 HP

LRS72P | 72-inch

LRS84P | 84-inch

LRS96P | 96-inch

- Heavy pivot components increase product longevity.
- Large, structural tine beam channel holds alloy spring steel tines firmly.
- Fast, easy and safe hook-ups with ASABE quick-hitch compatibility.
- Optional gauge wheels allow better depth control and optional parking stand for easier attachment.



MODEL	LRS52	LRS60	LRS72	LRS72P	LRS84P	LRS96P
Tractor Engine HP Range	up to 30 hp			20 - 45 hp		
Tractor Hitch	Limited CAT 1 & 1			CAT 1		
Working Width	52"	60"	72"	72"	84"	96"
Approximate Weight	156 lbs	168 lbs	186 lbs	264 lbs	288 lbs	311 lbs
Pivot Angle	Forward - 5 @ 15°, Reverse - 5 @ 15°					
Tines Dimensions	5/16" x 1"					
Tines Spacing	1"					
Gauge Wheels	optional					
ASABE Quick-hitch Compatible	yes					
Parking Stand	optional					

* NOTE: LRS72P, LRS84P and LRS96P are Premium Models

Shown with optional parking stand.

LANDSCAPE EQUIPMENT | **Post Hole Diggers**



NEW
2021
TRACTOR PTO HP RANGE: 14 - 95 HP
PD25.20 PD35.30 PD95.50

Ideal for landscapers, farmers and municipalities planting trees and shrubs or installing decks and fencing in all soil types and conditions.

- Heavy-duty welded construction and shear pin increase product longevity.
- Rugged gearbox with tapered roller bearings withstands shock load to handle the toughest projects.
- PTO driveline holder for easier set up.
- Six-year gearbox warranty.


**Three sizes in
three duty classes**

PD35.30

MODEL	PD25.20	PD35.30	PD95.50
Tractor PTO HP Range	14 - 25 hp	20 - 35 hp	35 - 95 hp
Tractor Hitch	CAT 0, Ltd 1, & 1	CAT 1	CAT 1 & 2
Approximate Weight (without auger)	177 lbs	178 lbs	245 lbs
Drive Type	gearbox		
Tractor PTO Speed	540 rpm		
Shear Pin	standard		
Positioning Handle	standard		
Parking Stand	standard		
Auger (diameter x length)	6", 9", 12" x 36"	6", 9", 12", x 36"	6", 9", 12", 18", 24" x 48"
Auger Extension	optional (12")		

TILLAGE EQUIPMENT



WOODS TILLAGE EQUIPMENT

When you're ready to dig in and work the soil, turn to Woods. We bring a well-earned reputation for durability, reliability and innovation to our line of tillage equipment. Woods rotary tillers and disc harrows are designed for medium- and heavy-duty projects on homes, small farms, orchards or nurseries and for anyone living the country life. Choose from a range of widths depending upon your tasks.

THERE'S NOTHING LIKE THE SMELL OF FRESH TURNED DIRT.



Woods' line of rotary tillers couples the best design features with outstanding performance. In fact, our 30- and 40-series rotary tillers received the 2017 ASABE award for Outstanding Innovations in Product or Systems Technology.

When you're ready to dig in and work the soil, turn to Woods.

CHOOSE FROM FORWARD AND REVERSE ROTATION

In 44- to 74-inch widths, Woods' forward rotation rotary tillers are ideal for moist, wet, rocky, sandy or loose soil conditions. Reverse rotation tillers deliver a smoother top layer of soil by allowing ground cover to travel over the rotor top first, then incorporating it back into the ground beneath a fresh new layer of dirt.



REVERSE

FORWARD

TILLAGE EQUIPMENT | Rotary Tillers



Woods' line of rotary tillers couples the best design features with outstanding performance for the discerning user. Our tillers will handle your landscaping and gardening projects with ease.

RT48.30

TRACTOR PTO HP RANGE: 12 - 35 HP 30-SERIES ROTARY TILLERS

RT42.30/RTR42.30 | 41-inch

RT48.30/RTR48.30 | 47-inch

TRACTOR PTO HP RANGE: 18 - 50 HP 40-SERIES ROTARY TILLERS

RT60.40/RTR60.40 | 59-inch

RT72.40/RTR72.40 | 71-inch

- Innovative double-flange blade support.
- Gear-driven side drive – less maintenance than chain-driven units.
- 3-year warranty on input gearbox (includes seals).



MODEL	RT42.30/RTR42.30	RT48.30/RTR48.30	RT60.40/RTR60.40	RT72.40/RTR72.40
Tractor PTO HP Range	12 - 30 hp	15 - 35 hp	18 - 40 hp	20 - 50 hp
Tractor Hitch	Limited CAT 1 & 1		CAT 1	
Tilling Width	41"	47"	59"	71"
Overall Width	51"	57"	69"	81"
Weight	478 lbs / 484 lbs	502 lbs / 508 lbs	570 lbs / 578 lbs	621 lbs / 630 lbs
Maximum Tilling Depth	7"	7"	7"	7"
Drive Type	gearbox			
Standard Number of Tines/Number of Flanges	20/5	24/6	28/7	36/9
Number of Tines per Flange	4 C-type			
Rotor Shaft	210 rpm			
PTO Driveline Protection	slip clutch			
Tractor PTO Speed	540 rpm			
Gearbox Housing	heavy-duty cast iron			
Gearbox Drain Plug	yes			
Convertible Side Shift Right	3"			2.5"
Quick-hitch Compatible	yes			

**RT48.30**

TILLAGE EQUIPMENT | Disc Harrows

Whether you're breaking new ground for a garden, or tilling an existing nursery, food plot, vineyard or farm, Woods has the right disc harrow for your land. These rugged disc harrows carry Woods' reputation for durability and reliability. Plus, these new discs are easy to use due to innovative design features like individually adjustable disc gangs that reposition with a single pin.

TRACTOR PTO HP RANGE: UP TO 55 HP

DHS48 | 48-inch

DHS64 | 64-inch

DHS80 | 80-inch

- Optional mud scrapers that prevent clogging, increase productivity.
- Optional furrow fillers (DHS64, DHS80).



DHS64
Notched
Shown with
optional mud
scrapers.

MODEL	DHS48	DHS64	DHS80
Tractor Engine HP	up to 35 hp	25 - 45 hp	35 - 55 hp
Tractor Hitch	CAT 1, Lim. CAT 1	CAT 1	
Width	48"	64"	80"
Weight (Depends Upon Blade Type)	390 lbs	508 lbs	590 lbs
Disc Blade Type	notched	notched; or combination smooth and notched	
Average Weight per Blade	33 lbs	36 lbs	33 lbs
Disc Diameter / Quantity	16" / 12	18" / 14	18" / 18
Disc Spacing	7.5" front and rear	9" front, 7.5" rear or 7.5" front and rear	
Gang Axle Diameter	1" square		
Frame Construction	3" x 3" tube and angle		3" x 3" tube and channel
Quick-hitch Compatible	yes		


TILLAGE EQUIPMENT | Disc Harrows

TRACTOR PTO HP RANGE: 45 - 85 HP

DHM80 | 80-inch

DHM96 | 96-inch

- Optional furrow fillers to reduce end ridges.
- Optional rear drawbar for towing equipment.
- Optional mud scrapers that prevent clogging, increase productivity.

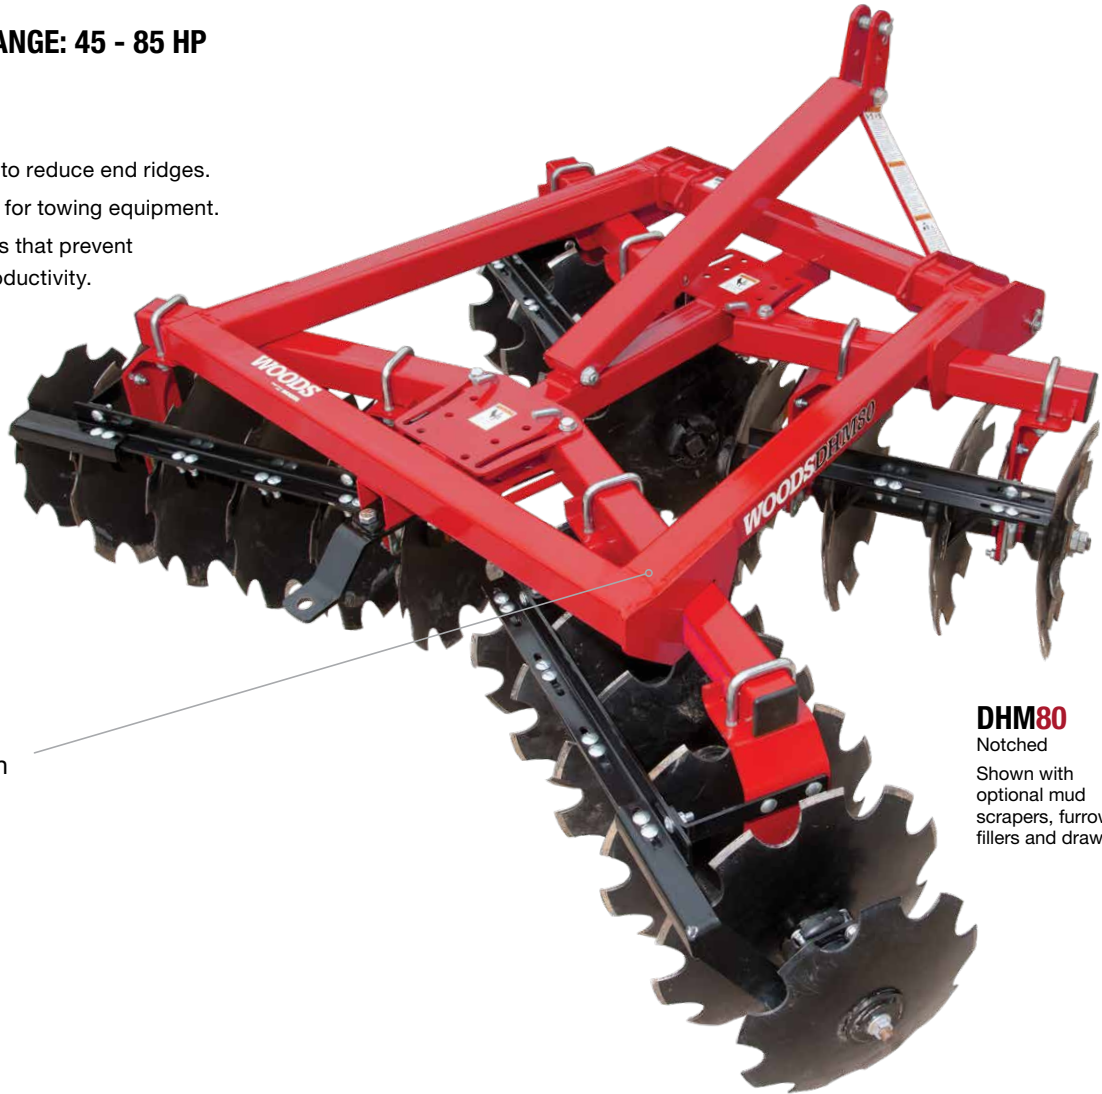

TAPERED FRAME

Tapered frame design balances individual disc gangs for easy adjustments.

DHM80

Notched
Shown with optional mud scrapers, furrow fillers and drawbar.

MODEL	DHM80	DHM96
Tractor Engine HP	45 - 75 hp	55 - 85 hp
Tractor Hitch	CAT 1 & 2	
Width	80"	96"
Weight (Depends Upon Blade Type)	845 lbs	960 lbs
Disc Blade Type	notched; or combination smooth and notched	
Average Weight per Blade	47 lbs	44 lbs
Disc Diameter / Quantity	20" / 18	20" / 22
Disc Spacing	9" front, 7.5" rear or 7.5" front and rear	
Gang Axle Diameter	1 1/8" square	
Frame Construction	3" x 3" tube	
Quick-hitch Compatible	yes	

SEEDERS



SEEDERS

Woods' seeders give you the flexibility to handle primary seeding, over-seeding, and can even plant up to three types of seed in one pass. You choose the combination of seed boxes that fits your application. That means efficient, one-pass planting that maximizes efficiency and productivity.

MAXIMIZE PLANTING EFFICIENCY AND PRODUCTIVITY WITH WOODS' SEEDERS.

WHAT CAN WOODS SEEDERS PLANT?
HERE IS A PARTIAL LIST ...

COOL SEASON GRASS AND CEREAL GRAINS (LARGE SEEDS)

Annual Ryegrass
Barley
Buckwheat
Buffalo Grass
Chufa
Corn (small rounds)
Fescue
Kentucky Bluegrass Blends
Kidney Beans
Lablab
Lima Beans
Oats
Orchardgrass
Peas
Perennial Ryegrass
Snow Peas
Sorghum
Soybeans
Sudan
Sugar Beets
Sunflower
Triticale
Wheat

LEGUME BOX (SMALL SEEDS)

Alfalfa
Bahai
Bermuda
Birdsfoot Trefoil
Black-eyed Susan
Brassica
Brown Top Millet
Carpet Grass
Centipede
Chicory
Clover
Fescue
Forbes
Green SprangletopKale
Kentucky Bluegrass
Kleingrass
Plains Bristlegrass
Radish
Rape
Side Oats Grama
Sudan
Sugar Beets
Switchgrass
Timothy
Turnip
Zoysia

NATIVE WARM SEASON GRASS BOX (FLUFFY, LIGHT-WEIGHT SEEDS)*

Big Bluestem
Brome
Canadian Wild Rye
Indian Grass
Little Bluestem
Sideoats Grama

* Precision Super Seeder only



SEEDERS | Food Plot Seeders



TRACTOR PTO HP RANGE: 25 - 65 HP

FPS48 | 49-inch FPS60 | 60-inch

- Three-point hitch: CAT 1 & 2.
- Working widths from 48–60 inches.
- Eight notched disc blades cut into the dirt.

TRACTOR PTO HP RANGE: 35 - 125 HP

FPS72 | 72-inch FPS84 | 84-inch

- Three-point hitch: CAT 1 & 2 (72-inch), CAT 2 (84-inch).
- Working widths from 72–84 inches.
- Ten notched (FPS72) disc blades prepare the seedbed.
- Twelve notched (FPS84) disc blades prepare the seedbed.

FPS72

Shown with optional mud scrapers.

MODEL
Tractor Engine HP Range
Tractor Hitch
Working Width
Weight (Standard Configuration*)
Weight (Fully Configured**)
Drive Type
Number of Seed Boxes Available
Seed Box Ratio
Seed Cups (7" spacing)
Row Units
Cool Season Seed Box Capacity
Legume Seed Box Capacity
Disc Blades
Cast Iron or Nylon Trailing Cultipacker
Calibration Tray & Crank Handle
Mud Scrapers & Frame Platform
ASABE Quick-hitch Compatible

FPS48	FPS60	FPS72	FPS84
25 - 45 hp	30 - 65 hp	35 - 85 hp	40 - 125 hp
CAT 1 & 2			
49"	60"	72"	84"
821 lbs	899 lbs	1,196 lbs	1,320 lbs
1,084 lbs	1,222 lbs	1,578 lbs	1,762 lbs
ground			
3			
1-speed			
7	8	10	12
standard			
4.00 bushel	5.00 bushel	6.00 bushel	7.00 bushel
1.00 bushel	1.25 bushel	1.50 bushel	1.75 bushel
(8) 16" notched		(10) 18" notched	(12) 18" notched
optional (9.5" diameter cast iron or 11" diameter nylon)			
standard			
optional			
yes			

Plant up to three types of seed in one pass. Ideal for hunters and small acreage farmers seeding legumes and larger seeds.

- Three seed box choices — one cool season and two legume — can plant a variety of seeds like alfalfa, clover, corn, sorghum, soybeans, turnips and wheat.
- A trailing cultipacker firms the seedbed for perfect seed-to-soil contact that's ready to trap moisture for germination.
- Plant cool season seeds, in rows, at a deeper depth while evenly broadcasting up to two types of legume seeds at a shallow depth — all in one pass.

* Includes spiked drive roller, disc blades, cool season seed box, and row units.
** Includes cultipacker drive roller, notched disc blades, cool season seed box, row units, 1st and 2nd legume seed boxes, and nylon trailing cultipacker.

SEEDERS | Precision Super Seeders


PSS84

TRACTOR PTO HP RANGE: 25 - 45 HP

PSS48 | 49-inch **PSS60** | 60-inch

- Three-point hitch: CAT 1 & 2.
- Working widths from 48–60 inches.
- Heat treated front roller spikes prepare the soil for planting.

TRACTOR PTO HP RANGE: 30 - 85 HP

PSS72 | 72-inch **PSS84** | 84-inch

- Three-point hitch: CAT 1 & 2 (72-inch), CAT 2 (84-inch).
- Working widths from 72–84 inches.
- Heat treated front roller spikes are adjustable for primary over-seeding.

The Precision Super Seeder gives you the flexibility to handle primary seeding, over-seeding and applications such as native grasses and food plots. It's the most versatile seed box combination on the market.

- Three seed box options — cool season, warm season and legume — let you plant anything from rye and oats to prairie grasses, wild flowers, radishes and soybeans.
- Efficient, one-pass planting of up to two seed types at one depth and legume seeds at a different depth — with models equipped with three seed boxes.
- All seed boxes can be engaged and disengaged independently with a single lynch pin — no tools required.

MODEL
Tractor Engine HP Range
Tractor Hitch
Working Width
Weight (Standard Configuration*)
Weight (Hunting Edition Configuration**)
Drive Type
Number of Seed Boxes Available
Seed Metering
Seed Cups
Cool Season Seed Box Capacity
Native Warm Season Seed Box Capacity
Legume Seed Box Capacity
Front Roller Spikes
ASABE Quick-hitch Compatible

PSS48	PSS60	PSS72	PSS84
25 - 45 hp	30 - 65 hp	35 - 85 hp	40 - 125 hp
CAT 1 & 2			
49"	60"	72"	84"
949 lbs	1,065 lbs	1,178 lbs	1,346 lbs
1,172 lbs	1,351 lbs	1,555 lbs	1,727 lbs
ground			
3			
fluted and picker wheel			
7	8	10	12
4.00 bushel	5.00 bushel	6.00 bushel	7.00 bushel
5.00 bushel	6.25 bushel	7.50 bushel	8.75 bushel
1.00 bushel	1.25 bushel	1.50 bushel	1.75 bushel
(128) .5" x 1.75" carbide steel	(160) .5" x 1.75" carbide steel	(192) .5" x 1.75" carbide steel	(224) .5" x 1.75" carbide steel
yes			

* Standard configuration consists of frame with spiked, ground drive roller, adjustable front spiked rollers and cool season seed box.

** Hunting Edition configuration consists of frame with spiked, ground drive roller, adjustable front disc blades, cool season seed box, legume seed box and cast iron cultipacker.

SEEDERS | Compact Super Seeders

The Woods Compact Super Seeder is everything you need in one compact cultivation and planting package. In one pass you can prepare the seed bed, precisely drop seeds at two different depths, then firm the bed for improved germination.

TRACTORS

CSS48: 15 HP - 35 HP

CSS60: 20 HP - 45 HP

ATVS AND UTVS (4WH)

CSS48: minimum 350cc

CSS60: minimum 400cc



CHOOSE THE FEATURES THAT FIT YOUR PROJECT

Every model starts with a spiked drive roller and a cool season seed box.
Then, choose the front tool that will prepare your seed bed.



ADD ONE, OR ALL, OF THESE OPTIONS TO IMPROVE YOUR PRODUCTIVITY AND VERSATILITY:

1.



Spiked roller with adjustable angles that will penetrate thatch and aerate lawns. Or, angle it to break up the surface and remove stands of turf.

2.



Adjustable disc blades that will cut into and work the soil. Easily adjust the blade angles to till more aggressively depending upon soil conditions.

3.

Add a legume seed box and now you can plant two seeds at different depths in one pass.

4.

A rear cultipacker that increases seed-to-soil contact, firms the seed bed, and creates furrows to trap and channel water which improves germination rates.

5.

Mud scrapers which help keep blades free from dirt clods, mud and clay.

6.

An electric tow kit for ATVs and UTVs and hydraulic tow kit for tractors that make it easy to transport.

PLUS, A FAST/SLOW CHAIN DRIVE, ROAD LIGHTS, SEED STOP PLATES – THE OPTIONS OFFER YOU NEARLY ENDLESS WAYS TO CUSTOMIZE YOUR WOODS COMPACT SUPER SEEDER.

SEEDERS | Compact Super Seeders

REACH ONCE UNREACHABLE PLOTS

If you prefer to work the land on an ATV or UTV instead of a tractor, the Woods Compact Super Seeder is still your machine. Full-featured like our larger seeders, with the same rugged steel body and parts — yet, lightweight so that you can easily lift, tow, till and sow with an ATV or UTV. With the optional electric tow kit you don't even need to leave your seat to raise and lower the seeder.

Woods' superior design enables you to maneuver into tight spaces and reach once unreachable places. Go ahead, plant a little food plot in the woods. You can do it with the Woods Compact Super Seeders.



TRACTOR HP RANGE: 15 - 35 HP

CSS48 | 48-inch

- Three-point hitch: CAT 1 / Limited CAT 1.
- Working width 48 inches.
- ATV/UTV minimum 350cc.

TRACTOR HP RANGE: 20 - 45 HP

CSS60 | 60-inch

- Three-point hitch: CAT 1 / Limited CAT 1.
- Working width 60 inches.
- ATV/UTV minimum 400cc.



MODEL	CSS48	CSS60
Tractor Engine HP	15 - 35 hp	20 - 45 hp
Tractor Hitch	CAT 1/Limited CAT 1	
ATV/UTV Engine Size	minimum 350cc	minimum 400cc
Working Width	48"	60"
Overall Width	57"	69"
Weight with Seed, Depending upon Configuration	395 lbs - 679 lbs	487 lbs - 810 lbs
Drive Type	ground-driven spiked roller	
Number of Seed Boxes Available	1 or 2	
Seed Metering	6 seed cups	8 seed cups
Seed Box Ratio	5.1:1 or 14.4:1	5.1:1 or 14.4:1
Cool Season Seed Box with Agitator	standard	
Cool Season Seed Box Capacity	1 bushel	1.25 bushel
Legume Seed Box	optional	
Legume Seed Box Capacity	1 bushel	1.25 bushel
Front Tool Choices	6" - 16" notched disc blade or spiked roller	8" - 16" notched disc blade or spiked roller
Calibration Tray	standard	
Crank Handle	standard	
Spring-loaded Trailing Cultipacker	optional	
Speed Ranges	turf seed range 0-700 lbs/acre (cool season); food plot range 0-30 lbs/acre (legume)	
Options	fast/slow chain drive, Quick-hitch bushings, mud scrapers, seed stop plates, highway lights, tow kit	
ASABE Quick-hitch	add hitch pin bushings to make CAT 1 quick-hitch compatible	

SEEDERS | Compact Super Seeders

GOOD THINGS... PRECISION METERING, MANEUVERABILITY, VERSATILITY, PRODUCTIVITY, DURABILITY... COME IN COMPACT PACKAGES FROM WOODS.

Ideal for small-scale planting, such as food plots, lawns, gardens, wildflower meadows, waterways and roadways. Widths 48 or 60 inches and lighter weight so you can maneuver into formerly unreachable areas.

ADDITIONAL FEATURES STANDARD ON BOTH MODELS

- The calibration system includes seed charts, a calibration tray and crank for accurate seed rates. *WOODS Exclusive*
- Windowed seed cups and clear PVC tubes allow you to easily monitor the flow of seeds.
- A quick and easy disconnect – pull a pin and one or both seed boxes stop to make it a tilling tool for preparing the ground. Till your seed bed, then replace the pin and engage the seeding function for a final pass. *WOODS Exclusive*

PRECISION METERING – Precisely measure out seeds, reducing waste, plus enjoy the durability of metal (not plastic) meters.



MANEUVERABILITY – Easily weave into narrow spaces and make tight turns to plant areas that may not be accessible with a larger tractor and planter.

SEEDERS | Compact Super Seeders



VERSATILITY – Handle a wide range of seeds from Black-eyed Susans to corn. See our planting guide.

CSS60

WOODS
Exclusive

PRODUCTIVITY – Simultaneously plant two seed types at two different depths in one pass.

DURABILITY – Expect years of work from a rugged, Grade 80 steel body.

GETTING THE JOB DONE

You can take on almost any project around the farm with your Massey Ferguson tractor and the right set of Woods implements. That perfect set of implements turns your tractor into a productivity powerhouse — ensuring you get the job done fast and get it done right.

When you chose your tractor, you probably looked at the type of work you needed to get done and chose a machine with the tractor horsepower to suit the size of your farm. In matching that tractor to implements, you simply need to know your tractor's engine and PTO horsepower and wheel width. In the specification charts throughout this catalog, the horsepower requirements and widths are listed for each implement. This way, you can make sure you have enough power to operate the implement and that it is wide enough to cover your wheel tracks. If you have questions, just ask your Massey Ferguson dealer.

But how do you pick the right set of implements with so many to choose from?

Let us help! Our product development team has hand selected the top five attachments that every acreage owner needs to get started.



ROTARY CUTTER

With large areas of brush and overgrown grass, a rotary cutter is a must-have. Cutters are available in many widths and duty-classes to suit your tractor and use. Rotary cutters are not able to adjust to changes in topography — meaning too low of a cut and you're scraping the soil — so, not suited for finish mowing.



BW15.50



FINISH MOWER

Many rural homesteads benefit from sweeping lawns and old pastures that have been transformed to park-like settings. If you enjoy this type of landscape, a rear-mounted finish mower is the perfect choice to manage ongoing maintenance. Finish mowers are available in a variety of widths to cover your wheel tracks and to cover as much ground as possible to get the job done quickly and efficiently.



TK72.20



ROTARY TILLER

Whether you need to control weeds in your garden, get a field ready for planting, or prepare ground for a food plot, a rotary tiller makes fast work of dirt work. Matching the tiller to your tractor horsepower is key: As a general rule, every foot of width on a tiller requires at least eight horsepower from your tractor.



REAR BLADE

A rear blade is great for grading a driveway, cleaning up debris, or removing snow. Choose a blade that's the same width as your tractor tires or slightly larger. Price dictates features. For example, more expensive blades have both vertical and horizontal axis rotation, allowing you to tip and tilt the blade to one side or the other. More economical blades allow minimal adjustments, if any.



POST HOLE DIGGER

Faced with jobs such as fencing property, planting trees, or building a deck, post hole diggers make your work a lot easier. The auger is often sold separately, offering a choice of sizes for various projects. Diggers work well in most soil conditions. However, for extremely hard soil, go with a heavy-duty digger.

RT60.40



RB72.50



QUICK HITCH

And don't forget a Quick Hitch System. The Quick Hitch allows you to easily connect and switch out implements. A Quick Hitch connects to your tractor's three-point hitch so that all you have to do is back up to the implement, lift up and you're ready to go to work. If you are using a PTO-driven implement such as a rotary cutter or tiller, you will need to manually attach the drive shaft.





MASSEY FERGUSON

WOODS
75TH ANNIVERSARY SINCE 1946

IMPLEMENTS CATALOG

masseyferguson.us



AGCO **MASSEY FERGUSON** is a worldwide brand of AGCO.

AGCO, Your Agriculture Company, is a premier manufacturer of agricultural equipment, providing high-tech solutions for professional farmers feeding the world. The company is dedicated to delivering superior customer service, innovation and quality. AGCO products are distributed in more than 140 countries worldwide.

WOODS®

2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

©2021 Woods Equipment Company. All rights reserved. WOODS, Woods Batwing®, BrushBull™, TurfKeeper™, and the TurfKeeper Pro™ logos are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

We proudly support:

