



WOODS
GET AFTER IT

WOODS ATTACHMENTS FOR SUB-COMPACT & COMPACT TRACTORS

Good things come in compact packages



MOWERS, SNOW BLOWERS, DIGGERS, SCRAPERS, AND SEEDERS COME IN COMPACT PACKAGES FROM WOODS



INNOVATION SINCE 1946

Woods' long history of innovation began with Leonard W. Wood and his brothers, Mervel and Keith. In a post-war era, Oregon, Illinois, ripe for entrepreneurship, the brothers worked together to build the first successful tractor-mounted rotary cutter, and eventually founded Woods Brothers Manufacturing Co., in 1946.

Since that time, Woods has secured over 65 patents and built a global footprint in agriculture machinery with manufacturing and distribution throughout North America, Latin America and Australia. Today, Woods attachments and implements are used for mowing roadsides and parcels, maintaining pastures and waterways, shredding crops, and countless other applications.

Your Woods Dealer

Our products are distributed and backed by a network of authorized Woods dealers because we believe in the expertise and service you can only get from an experienced, specialized retailer. From the moment you walk into the showroom and for years to come, your Woods dealer will help you select the right equipment and offer follow-up service and maintenance. To find your nearest store visit us at woodsequipment.com or call 800-319-6637.

TABLE OF CONTENTS

MOWING	4
BrushBull™ Single-spindle Premium Cutters	4
RC-Series Single-spindle Standard Cutters	7
TurfKeeper™ Rear-mount Finish Mowers	8
TurfKeeper Pro™ Rear-mount Finish Mowers	10
SEEDING	12
Compact Super Seeders	12
BACKHOES	14
Groundbreaker® Backhoes	14
TILLING	16
Rotary Tillers	16
Disc Harrows	18
MOVING DIRT & REMOVING SNOW	19
Box Scrapers	20
Grading Scrapers	20
Rear Blades	21
Landscape Rakes	22
Post Hole Diggers	23
Snow Blowers	24
WOOD CLEAN UP	25
Stump Grinder	25
SKID STEER	26
Pallet Forks	26
Bale Spears	26

This catalog showcases our attachments that fit tractors with less than 40 horsepower. See our complete line, with attachments for 40HP+ tractors, at woodsequipment.com.



TOP 5 IMPLEMENTS EVERY FARM NEEDS

That perfect set of implements will ensure you get the job done fast and right.

When choosing implements, you simply need to know:

- your tractor's engine and PTO horsepower
- your tractor's wheel width

Now, match it to the horsepower requirements and widths listed in our specification charts to ensure you have enough power to operate the implement and that it's wide enough to cover your wheel tracks.



Finish Mower

A Rear-mount Finish Mower will keep your grassy areas well manicured. Look for one with a durable design that provides even distribution of the cut material. Make sure it's quick-hitch ready for easy attachment to your tractor.



Rotary Cutter

With large areas of brush and overgrown grass, a rotary cutter is a must-have. Cutters are available in many widths and abilities to suit your tractor and use. Rotary cutters are not able to adjust to changes in topography — meaning too low of a cut and you're scraping the soil — so, not suited for finish mowing.



Rear Blade

A rear blade is great for grading a driveway, cleaning up debris, or removing snow. Choose a blade that's the same width as your tractor tires or slightly larger. Price dictates features. For example, more expensive blades have both vertical and horizontal axis rotation, allowing you to tip and tilt the blade to one side or the other. More economical blades allow minimal adjustments.



Rotary Tiller

Whether you need to control weeds in your garden, get a field ready for planting, or prepare ground for a food plot, a rotary tiller makes fast work of dirt work. Matching the tiller to your tractor horsepower is key: As a general rule, every foot of width on a tiller requires at least 8 horsepower from your tractor.



Post Hole Digger

Faced with jobs such as fencing property, planting trees, or building a deck, post hole diggers make your work a lot easier. The auger is often sold separately, offering a choice of sizes for various projects. Diggers work well in most soil conditions. However, for extremely hard soil, go with a heavy-duty digger.

Woods

GENUINE PARTS



Since our founding in 1946, Woods has built a strong reputation for manufacturing equipment with superior design and durability. So when it comes to keeping your equipment in top condition, there's only one choice. Woods Genuine Parts are designed for the best performance on your Woods equipment, not simply to "fit." We stand behind the quality of our replacement parts. And, our network of knowledgeable dealers is essential to not only get you the parts you need today, but to maintain your machine and keep you going for years to come.

3 TIPS FOR CHOOSING THE RIGHT ATTACHMENT

- 1. Consider the work and frequency.** Your job and how often you do it will determine the right attachment. For example, how many acres do you mow and how often? Do you need a finish mower for a fine cut or a rotary cutter for tall grass and brush?
- 2. Match the attachment to your tractor horsepower.** Your tractor needs enough horsepower to properly run the attachment and maximize its performance, but not too much horsepower or you could damage the implement. Match the "hp range" of your tractor and the equipment.
- 3. Ensure the attachment is wider than your tractor's rear tires.** When mowing and working the dirt it's best to have the implement cover the rear tire tracks, especially when trimming and working along edges. It leaves a smoother and more uniform appearance.

QUICK HITCH

Woods TQH1 quick hitch makes easy work of changing from one 3-point attachment to another. When hooking up to many implements, you never have to leave the tractor because lower hooks automatically lock implement into place.

- Heavy-duty steel construction with adjustable top link bracket
- 7/8-inch diameter mounting pins and adapter bushings
- Lower arms lock automatically
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch compatibility



	TQH1
Tractor Hitch	CAT 1
Width (inches)	27.25"
Approximate Weight (lbs)	75 lbs
Mounting Pin Diameter (inches)	.875"
Adapter Bushing Diameter (inches)	1.125"

MOWING



BRUSHBULL™ SINGLE-SPINDLE PREMIUM CUTTERS

Since 1946, Woods has grown to become the undisputed cutter expert. This legacy began with development of the first tractor-mounted rotary cutter and continues today with unmatched product innovation and service. Woods' BrushBull™ single-spindle line has set the standard for today's rotary cutter market — with innovations such as the smooth, slope-top deck and patented Quick-change blades — and continues to lead the pack.

Our most popular models are ideal for clearing brush along fence rows, maintaining miles of interstate highways, and cutting overgrown grass, weeds and brush wherever you need to tame the land.



BB48.30
Shown with optional
chain shielding

BB72.30
Shown with optional
chain shielding

BRUSHBULL™ SINGLE-SPINDLE ROTARY CUTTERS

TRACTOR PTO HP RANGE: 15 - 75 HP

BB48.30 | 48-inch

BB60.30 | 60-inch

BB72.30 | 72-inch

- Three-point hitch: CAT 1 quick-hitch ready.
- Cuts brush up to two inches in diameter.
- Six-year limited gearbox warranty includes the seals.
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Check chain is available on all models.



TRACTOR PTO HP RANGE: 35 - 90 HP

BB84.40 | 84-inch

- Three-point hitch: CAT 1 & 2 quick-hitch ready.
- Cuts brush up to two inches in diameter.
- Six-year limited gearbox warranty includes the seals.
- Eleven-inch deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Choose an optional dual tailwheel for adjusting the mowing height.
- Check chain is available on all models.

MODEL	BB48.30	BB60.30	BB72.30	BB84.40
Tractor PTO HP	15-50 hp	25-50 hp	30-75 hp	35-90 hp
Hitch Category/Type	CAT 1 clevis			CAT 1 & 2 clevis
Cutting Width (inches)	48"	60"	72"	84"
Total Weight (lbs)	590	672	811	1,041
Cutting Capacity Diameter (inches)	2"	2"	2"	2"
Adjustable Cutting Height (inches)	1" - 9"			2" - 12"
Transport Width (inches)	55"	67"	79"	91"
Overall Length (inches)	86"	99"	111"	124"
Tractor PTO Speed (rpm)	540			540
Quick-hitch Compatible	yes			yes
Rear Bumper	Z-channel			Z-channel
Frame & Deck Support	3" x 3" tube			3" x 3" tube
Deck Construction	smooth top, sloped			smooth top, sloped
Skid Shoes	full-length, replaceable			full-length, replaceable
Deck Thickness	12 gauge (.105")		11 gauge (.120")	11 gauge (.120")
Side Frame Thickness (inches)	10 ga (.135")			10 ga (.135")
Side Frame Depth (inches)	10.5"			11.6"
Gearbox Warranty	6-year limited			6-year limited
Gearbox HP	65 hp	65 hp	75 hp	90 hp
Output Shaft Diameter (inches)	1.57"			2"
Blade Tip Speed	13,000 fpm	14,335 fpm	14,963 fpm	15,086 fpm
Blade Dimensions (inches)	.50" x 4"			.50" x 4"
Blade Pin Diameter (inches)	1.50"			1.50"
Blade Carrier	oval stump jumper			oval stump jumper
Driveline Protection	slip-clutch			slip-clutch
Options	check chain			check chain, dual tailwheel

RC-SERIES SINGLE-SPINDLE STANDARD CUTTERS

Woods' RC-Series Single-spindle is ideal for getting the most from your compact or sub-compact tractor. Built with high-strength steel, Woods confidently stands behind this product with our three-year gearbox warranty.

TRACTOR PTO HP RANGE: 15 - 50 HP

RC42.20 | 42-inch **RC48.20** | 48-inch

RC60.20 | 60-inch **RC72.20** | 72-inch

- Four cutting widths to fit the size of your job and paint colors to match your tractor.
- Unique smooth, sloped decks are easy to clean and reduce build-up of water and debris.
- Stump jumpers are standard on all models for added driveline protection.
- High-strength steel and quality parts provide dependable service year-after-year.
- Three-year gearbox warranty is one of the best in the industry.



MODEL	RC42.20	RC48.20	RC60.20	RC72.20
Tractor PTO HP	15-40 hp		20-50 hp	
Hitch Category / Type	CAT 1 cantilevered			
Cutting Width (inches)	42"	48"	60"	72"
Adjustable Cutting Height (inches)	2"-9"			
Cutting Capacity (inches)	1"			
Gearbox Horsepower	50 hp			
Blade Tip Speed	11,460 fpm	13,100 fpm	13,620 fpm	14,340 fpm
Side Frame Depth (inches)	7"			
Approximate Weight (lbs)	360	410	494	575
Blade Dimensions (inches)	.5" x 3"			
Blade Carrier	oval stump jumper			
Tailwheel	4" x 16" laminated			
Driveline Protection	shear-bolt or slip-clutch			
Driveline Holder	yes, on deck			
Tractor PTO Speed (rpm)	540			
Quick-hitch Ready	yes			
Cutting Area Shielding	belt standard; chain shielding optional			
Warranty (cutter/gearbox)	1 year / 3 years			



Choose Your Color!

Painted to match most tractor brands.



RC72.20

Shown with optional chain shielding



BB72.60
Shown with optional
chain shielding

TURFKEEPER™ REAR-MOUNT MOWERS



TIME TO GET EVEN

EVEN CUT. EVEN DISTRIBUTION. EVEN COSTS LESS TO OWN.



Introducing the new rear-mount finish mowers from Woods, the TurfKeeper™, designed to deliver outstanding cut quality at a lower cost of ownership.



3-year Gearbox Warranty

Confidence in the durability of your Woods mower.



1-year Spindle Warranty

Lubed for life spindles with one year warranty provide ease of mind.



Driveline Holder

Keep the drive out of the dirt, even when attaching.




Easy Shield Removal

No tools needed to access belt sheaves, belt, spring-loaded idler.



Cast Iron Sheaves

Better belt grip for extended belt life.



Serviceable Belt Idler

Replaceable idler post and bronze bushing.



Optional Chain Shielding

Helps prevent discharge of foreign objects.



Optional Front Roller

Anti-scalp protection for uneven terrain.



Quick-hitch Ready

CAT 1 quick-hitch compatible as shipped.

TURFKEEPER™ REAR-MOUNT MOWERS



3-year Gearbox Warranty

Confidence in the durability of your Woods mower.


Driveline Holder

Keep the drive out of the dirt, even when attaching.



1-year Spindle Warranty

Lubed for life spindles with one year warranty provide ease of mind.

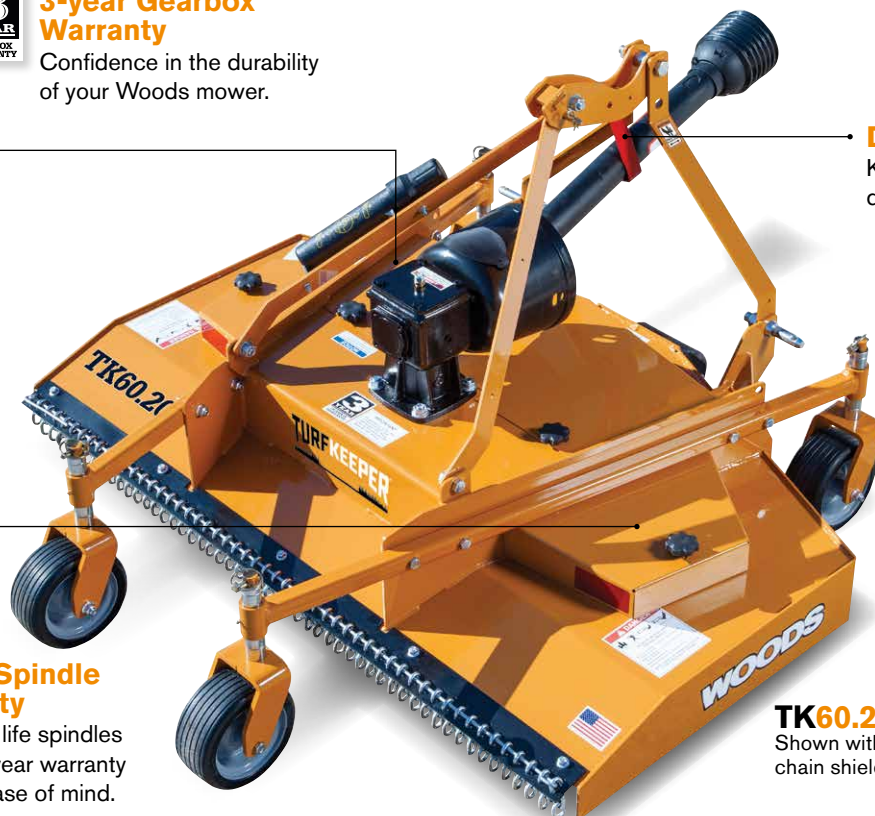

TK60.20

Shown with optional chain shielding

MODEL	TK60.20	TK72.20
Tractor PTO HP Range	15-35 hp	20-35 hp
Hitch / Quick-hitch Ready	Limited CAT 1 & CAT 1 / Yes	CAT 1 / yes
Cutting Width (inches)	60"	72"
Weight (lbs)	480	540
Adjustable Cutting Height (inches)	1.5 - 5"	
Overall Width (inches)	61"	73"
Deck Material Thickness	10 gauge	
Side skirt (inches)	7 gauge x 4.8" deep	
Gearbox HP Rating	35 hp	
Blade Tip Speed	17,900 fpm	18,000 fpm
Blade Overlap (inches)	1.25"	
Blade Spindles / Bearings	3 cast iron housings / greasable ball bearings	
Spindle Maintenance	Lubed-for-Life	
Tractor PTO Speed	540 rpm	
Driveline Size	CAT 2	
Belt	B-section Kevlar®	
Belt Adjustment	spring-loaded idler	
Cutting Area Shielding	chain shielding (optional)	
Mower Warranty	1 year residential or 90 days commercial	
Gearbox Warranty (limited)	3 year homeowners, 1 year commercial	

TRACTOR PTO HP RANGE: 15 - 35 HP

TK60.20 | 60-inch cutting width

TK72.20 | 72-inch cutting width

- High-lift blades for best in class lifting and cutting of green material for evenness of cut.
- Parallel frame deck sides spread material from edge to edge for even material distribution.
- High blade tip speeds enhance productivity with improved mowing at higher speeds for less time on the job.
- Hitch: Limited CAT 1 (TK60.20) and CAT 1 (TK60.20 & TK72.20).



*** NOTE:** All TurfKeeper™ finish mower models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

TURFKEEPER PRO™ REAR-MOUNT MOWERS



TIME TO GET EVEN LIKE A PRO

EVEN CUT. EVEN DISTRIBUTION. EVEN COSTS LESS TO OWN.




TurfKeeper Pro™ is packed with features including a deep high-grade steel deck, premium caster wheels, and heavy-duty construction to meet the demands of even the toughest commercial applications.

Re-designed under deck baffling, a floating lower hitch, high-lift blades, and parallel side frames create an extremely even cut and even distribution of cut material...even when mowing at higher speeds. For ease of attachment, TurfKeeper Pro comes with a convenient driveline holder and is quick-hitch ready from the factory, without the need for additional hardware.

Combine all these great features with our 6-year gearbox warranty and 3-year spindle warranty, and you'll have complete confidence that the TurfKeeper Pro is one of the most rugged, best performing, and easiest to use finish mowers available.



6-year Gearbox Warranty
Confidence in the durability of your Woods mower.



3-year Spindle Warranty
Ductile iron blade spindles with triple ball bearings and three-year warranty.




Driveline Holder
Keep the drive out of the dirt, even when attaching.




Easy Shield Removal
No tools needed to access belt sheaves, belt, spring-loaded idler.



Cast-iron Sheaves
Better belt grip for extended belt life.



Spring-loaded Belt Tensioner
Replaceable ball bearing pivot for smooth operation.



Optional Chain Shielding
Helps prevent discharge of foreign objects.



Optional Front Roller
Anti-scalp protection for uneven terrain.



Quick-hitch Ready
CAT 1 quick-hitch ready at purchase.

TURFKEEPER PRO™ REAR-MOUNT MOWERS

TRACTOR PTO HP RANGE: 15 - 50 HP

TKP60.40 | 60-inch cutting width

TKP72.40 | 72-inch cutting width

TKP84.40 | 84-inch cutting width

- Heavy duty construction provides maximum durability.
- Strong, 7 gauge steel deck and a powerful 60 hp gearbox.
- Uniquely designed for best-in-class cut quality.
- Floating lower hitch helps to follow ground contours for a smooth, even cut.
- Easy shield removal-no tools necessary.
- Deep deck and high blade tip speeds help you get the job done faster.
- Optional chain shielding attaches and detaches easily.
- Ideal for mowing large lawns, sports fields and parks.
- Superior baffle design distributes material more evenly.

Ease of Attachment

Quick-hitch ready from the factory for ease of attachment.



TKP72.40
Shown with optional chain shielding

Durability

Premium, solid rubber caster wheels for performance and durability.

TurfKeeper Pro delivers best-in-class cut quality at a lower cost of ownership.

It's time to get even with your grass - like a pro!

MODEL	TKP60.40	TKP72.40	TKP84.40
Tractor PTO HP	15-50	20-50	25-50
Product Weight (lbs)	617	686	790
Shipping Weight (lbs)	710	779	898
Hitch	CAT 1 & Ltd CAT 1	CAT 1	
Quick-hitch Ready	Yes		
Floating Lower Hitch	Yes		
Cut Width (in)	60	72	84
Overall Width (in)	61	73	85
Cut Height (in)	1.5 - 5.0		
Gearbox HP	60		
Driveline Category	CAT 3		
Spindle Housing	Ductile iron		
Spindle Bearings	Triple ball bearings		
Greasable Spindle	Yes		
Spindle Sheave Type	Cast-iron		
Belt	B-section Aramid		
Belt Adjustment	Spring-loaded w/ bearing pivot		
Blade Size (in)	1/4 x 2-1/2 x 21	1/4 x 2-1/2 x 25	5/16 x 2-1/2 x 29
Blade Overlap (in)	1.5		
Blade Tip Speed (fpm)	18,000	18,100	
Deck Thickness	7 ga		
Deck Depth (in)	5.38		
Caster Wheels (in)	4 x 10 solid		

SEEDING



The Woods Compact Super Seeder is everything you need in one compact cultivation and planting package. In one pass you can prepare the seed bed, precisely drop seeds at two different depths, then firm the bed for improved germination. Standard model has cool season seed box and spiked drive roller. Add options to improve productivity and versatility.

Widths 48 or 60 inches so you can maneuver into formerly unreachable areas.

Additional Features Standard on Both Models

- The calibration system includes seed charts, a calibration tray and crank for accurate seed rates. *WOODS Exclusive*
- Windowed seed cups and clear PVC tubes allow you to easily monitor the flow of seeds.
- A quick and easy disconnect – pull a pin and one or both seed boxes stop to make it a tilling tool for preparing the ground. Till your seed bed, then replace the pin and engage the seeding function for a final pass. *WOODS Exclusive*

Precision Metering

Precisely measure out seeds, reducing waste, plus enjoy the durability of metal (not plastic) seed meters.

Maneuverability

Easily weave into narrow spaces and make tight turns to plant areas that may not be accessible with a larger tractor and planter.

Versatility

Handle a wide range of seeds from Brown-eyed Susans to corn. See our planting guide.

Productivity

Simultaneously plant two seed types at two different depths in one pass.

Durability

Expect years of work from a rugged, Grade 80 steel frame.

COMPACT SUPER SEEDERS



CSS60

TRACTOR HP RANGE: 15 - 45 HP

CSS48 | 48-inch

CSS60 | 60-inch

- Three-point hitch:
CAT 1/Limited CAT 1
- Working width 48 - 60 inches

MODEL	CSS48	CSS60
Tractor Engine HP	15-35 hp	20-45 hp
Tractor Hitch	CAT 1/limited CAT 1	
Working Width (inches)	48	60
Drive Type	ground-driven spiked roller	
Number of Seed Boxes Available	1 or 2	
Seed Metering	6 seed cups	8 seed cups
Seed Box Ratio	5.1:1 or 14.4:1	5.1:1 or 14.4:1
Cool Season Seed Box with Agitator	standard	
Cool Season Seed Box Capacity (bushel)	1.00	1.25
Legume Seed Box	optional	
Legume Seed Box Capacity (bushel)	1.00	1.25
Front Tool Choices	6 - 16" notched disc blade or spiked roller	8 - 16" notched disc blade or spiked roller
Calibration Tray	standard	
Crank Handle	standard	
Spring-loaded Trailing Nylon Cultipacker	optional	
Speed Ranges	turf seed range 0-700 lbs/acre (cool season); food plot range 0-30 lbs/acre (legume)	
Options	fast/slow chain drive, Quick Hitch bushings, mud scrapers, seed stop plates, highway lights, tow kit	
ASABE Quick-hitch compatible	yes	

WHAT CAN THE WOODS COMPACT SUPER SEEDER PLANT? HERE IS A PARTIAL LIST...

Cool Season Grass and Cereal Grains

Annual Ryegrass
Barley
Buckwheat
Buffalo Grass
Chufa
Corn (small rounds)
Fescue
Hemp
Kentucky Bluegrass Blends
Kidney Beans
Lablab
Lima Beans
Oats
Orchardgrass
Peas
Perennial Ryegrass
Snow Peas
Sorghum
Soybeans
Sudan
Sugar Beets
Sunflower
Triticale
Wheat

Legume Box (small seeds)

Alfalfa
Bahai
Bermuda
Birdsfoot Trefoil
Black-eyed Susan
Brassica
Brown Top Millet
Carpet Grass
Centipede
Chicory
Clover
Fescue
Forbes
Green Sprangletop
Kale
Kentucky Bluegrass
Kleingrass
Plains Bristlegrass
Radish
Rape
Side Oats Grama
Sudan
Sugar Beets
Switchgrass
Timothy
Turnip
Zoyia

BACKHOES

Unmatched Performance


Combine an excavator-style curved boom, a construction grade Gannon® bucket, and Woods' unique easy-on/easy-off mounting system, and you've got the best built backhoe in the industry. Groundbreaker® backhoes are powerful diggers that are simple to service, require no tools to attach and detach, and offer greater bucket capacity than any other bucket in its class.

- Curved boom reaches farther over objects and under sidewalks and obstacles with less repositioning than a straight boom
- Variety of bucket choices ensures you have the right tool for your trenching and digging jobs
- Optional mechanical thumb allows you to easily pick up bulky materials such as tree limbs and concrete chunks

Superior Construction

Woods' reputation for premium quality products extends to our line of backhoes. Welded to American Welding Society standards and tested in rigorous real-life conditions, our backhoes are built to handle your most challenging digging and trenching jobs. And, you can dig with confidence, knowing your backhoe is in compliance with recommended industry safety standards.

- "Box section" design adds strength without weight, which increases lifting power
- Heavy-duty cylinders endure greater force and last longer
- Easy to service hoses and pins make maintenance a breeze
- Compatibility with most loaders and undermount mowers supports the versatility of your tractor
- An assortment of paint colors ensures a matching finish to your tractor

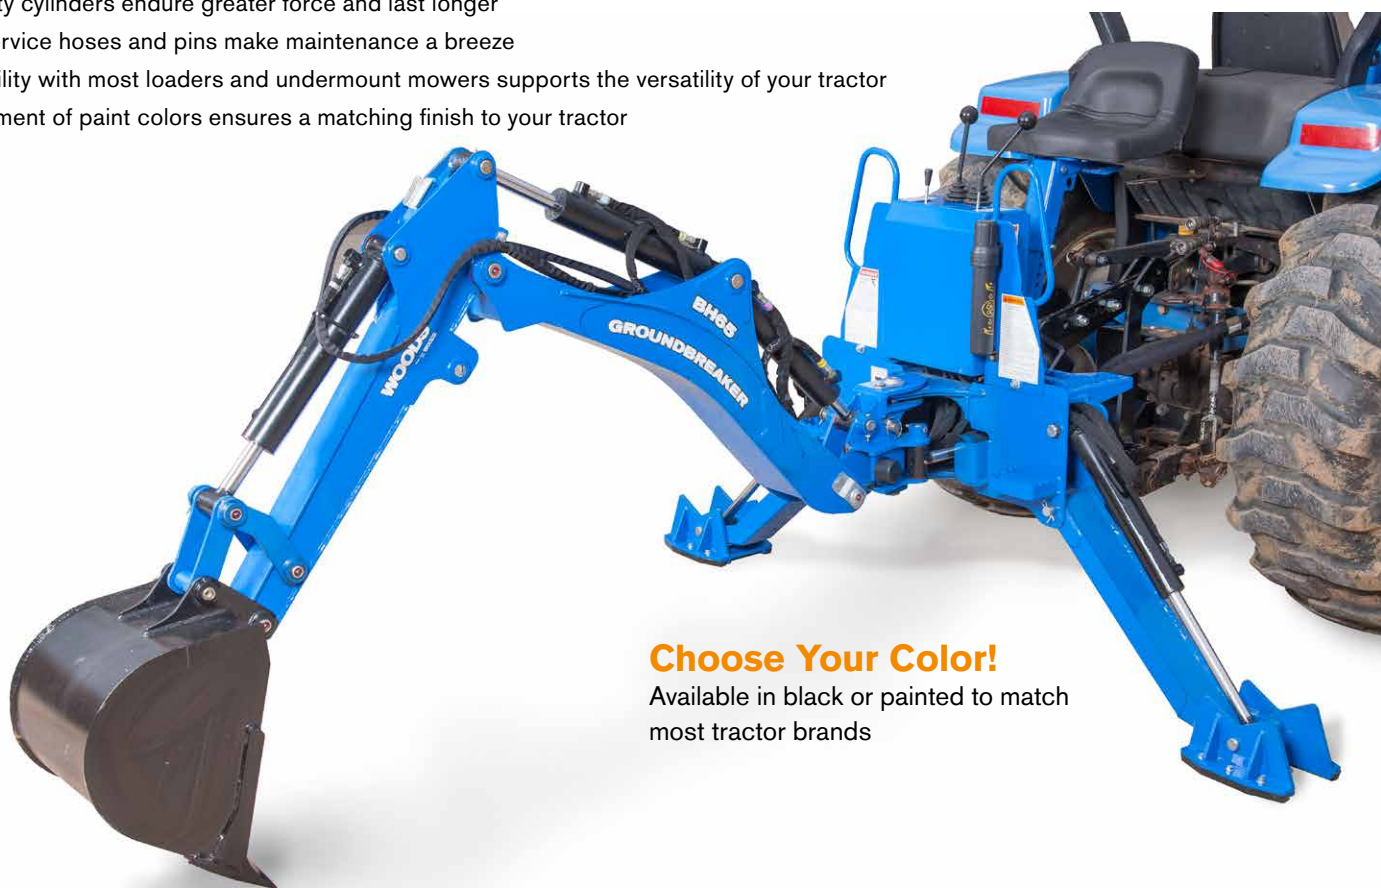

Choose Your Color!

Available in black or painted to match most tractor brands

GROUNDBREAKER® BACKHOES

TRACTOR PTO HP RANGE: 15 - 40 HP

BH65 | 6.5-foot

BH75 | 7.5-foot

- Curved boom offers better visibility and reaches over obstacles with little repositioning.
- Bolt-on bucket teeth are durable and easy to replace.
- Greasable end pins are simple to maintain and extend work life.
- High ramp angle and ground clearance make transporting easy.
- Sub-frame or 3-point hitch mounts are compatible with most loaders and undermount mowers.
- Optional mechanical thumb available.



Woods Groundbreaker® backhoes are rugged and affordable — ideal for trenching, excavating, and landscaping.

MODEL	BH65	BH75
Tractor PTO HP	15 - 30	20 - 40
Digging Depth - 2' Flat Bottom (inches)	78 (6.5 ft)	90 (7.5 ft)
Digging Depth - 8' Flat Bottom (inches)	52	70
Reach from Swing Pivot (inches)	102	119
Loading Height (inches)	60	73
Loading Reach (inches)	33.5	46
Transport Height (inches)	66.5	74
Transport Length (inches)	42	45
Approx. Weight - frame only (lbs)	695	842
Swing Arc (degrees)	150	180
Bucket Rotation (degrees)	180	
Stabilizer Spread - Up (transporting) (inches)	52	
Stabilizer Spread - Down (operating) (inches)	83	
Relief Pressure	2,030 psi	2,465 psi
Bucket Digging Force (lbs)	2,800	3,380
Dipperstick Digging Force (lbs)	1,590	2,230
Trenching Bucket Widths (inches)	9, 12, 16	9, 12, 16, 18, 24
Thumb	optional mechanical	
Flip-Over Stabilizer Pads	standard	
Stabilizer Street Pads	optional	
PTO Pump Kit	N.A.	optional
2-Cylinder Swing	-	yes
Warranty	2-year limited warranty includes your tractor	

TILLING

30- & 40-series Rotary Tillers

TRACTOR PTO HP RANGE: 12 - 50 HP

RT42.30/RTR42.30 | 41-inch

RT48.30/RTR48.30 | 47-inch

RT60.40/RTR60.40 | 59-inch

RT72.40/RTR72.40 | 71-inch

- Patented double-flange blade support.
- Gear-driven side drive – less maintenance than chain-driven units.
- 3-year warranty on input gearbox (includes seals).
- Rugged, heat-treated C-shaped tines for deep penetration in the toughest soils.
- Tapered tailgate removes furrow for a finished seedbed.
- Sturdy tubular integrated parking stand for easy storage and setup.



Woods' line of rotary tillers couples the best design features with outstanding performance for the discerning user. Our tillers will handle your landscaping and gardening projects with ease.

ROTARY TILLERS



Forward Rotation Tillers are ideal for moist, wet, rocky, sandy or loose soil conditions.

Reverse Rotation Tillers work best in non-rocky soil conditions. They deliver a smoother top layer of soil by allowing ground cover to travel over the rotor top first, then incorporating it back into the ground beneath a fresh new layer of dirt. More often than not, users can achieve an exceptional seed bed with fewer passes when using a reverse rotation tiller.

- 30 and 40 series models available as either forward or reverse rotation
- On initial pass reverse rotation tillers will often till deeper and faster than forward rotation models
- Slip clutch driveline protection is standard on all models
- Skid shoes standard

MODEL	RT42.30 RTR42.30	RT48.30/ RTR48.30	RT60.40/ RTR60.40	RT72.40/ RTR72.40
Tractor PTO HP Range	12 - 30 hp	15 - 35 hp	18 - 40 hp	20 - 50 hp
Tractor Hitch	Limited CAT 1 & CAT 1		CAT 1	
Working Width (inches)	41"	47"	59"	71"
Overall Width (inches)	51"	57"	69"	81"
Weight	478 / 484 lbs	502 / 508 lbs	570 / 578 lbs	621 / 630 lbs
Maximum Tilling Depth	7"			
Drive Type	gearbox			
Number of Tines / Number of Flanges	20 / 5	24 / 6	28 / 7	36 / 9
Number of Tines per Flange	4 C-type			
Rotor Speed	210 rpm			
Tractor PTO Speed	540 rpm			
PTO Driveline Protection	slip clutch			
Gearbox Housing	heavy-duty cast iron			
Gearbox Drain Plug	yes			
Quick-hitch Compatible	yes			



DISC HARROWS

There's nothing like the smell of fresh-turned dirt, especially when you're doing what you love... working the land.

Whether you're breaking new ground for a garden, or tilling an existing nursery, food plot, vineyard or farm, Woods has the right – the best – disc harrow for your land. You will get years of productive, reliable, dirt-turning work.

Built with high-strength U.S. steel, these rugged disc harrows carry Woods' reputation for durability and reliability. Plus, these new discs are easy to use due to innovative design features like individually adjustable disc gangs that reposition with a single pin.

TRACTOR HP RANGE: UP TO 85 HP

DHS48 | 48-inch

DHS64 | 64-inch

DHS80 | 80-inch

- Furrow fillers to reduce end ridges.*
- Rear drawbar for towing equipment.
- Mud scrapers that prevent clogging, increase productivity.
- Mud scrapers that prevent clogging, increase productivity.
- Furrow fillers (DHS64, DHS80).

* Does not apply to DHS48.



DHS64

MODEL	DHS48	DHS64	DHS80
Tractor Engine HP	15-35 hp	25-45 hp	35-55 hp
Tractor Hitch	CAT 1, Lim. CAT 1, CAT 0 optional	CAT 1	
Width (inches)	48"	64"	80"
Average Weight (lbs) - depending upon blade type	390	508	590
Disc Blade Type	notched	notched; or combination smooth and notched	
Average Weight Distribution per Blade (lbs)	33	36	33
Disc Diameter / Quantity	16" / 12	18" / 14 / 18" / 16	18" / 18 / 18" / 20
Disc Spacing	7.5" front and rear	9" front, 7.5" rear / 7.5" front, 7.5 rear	
Gang Axle Size (inches)	1" square		
Frame Construction	3" x 3" tube and angle		3" x 3" tube and channel
Quick-hitch Compatible	Yes		



MOVING DIRT & REMOVING SNOW

BOX SCRAPERS: Designed with exceptional strength and versatility to move large amounts of material.

GRADING SCRAPERS: Ideal for leveling dirt and gravel in driveways, lawns and fields.

REAR BLADES: Move dirt, grade driveways, and clear snow.

LANDSCAPE RAKES: Great for clean-up jobs and fine raking.

POST HOLE DIGGERS: Power through a variety of soil conditions and projects, like planting trees and shrubs or installing deck or fence posts.

SNOW BLOWERS: Move large amounts of snow in less time with this powerhouse rear mounted blower.

BOX SCRAPERS

When working the dirt it's best to have the implement cover your rear tire tracks, especially when working along edges. It leaves a smoother and more uniform appearance.



BSS72

TRACTOR HP RANGE: UP TO 45 HP

GBC48 | 48-inch

BSS54 | 54-inch

BSS60 | 60-inch

BSS65 | 65-inch

BSS72 | 72-inch

- Hardened scarifier teeth with replaceable tips.
- High-carbon reversible/replaceable cutting edges leaves a level finish.

MODEL	GBC48	BSS54	BSS60	BSS65	BSS72
Tractor Engine HP Range	15 - 25 hp	15 - 45 hp			
Tractor Hitch	CAT 0, Ltd 1 & 1	CAT 1			
Working Width (inches)	48"	54"	60"	65"	72"
Capacity (cubic feet)	6.8	10.3	11.5	12.5	13.8
Approximate Weight (lbs)	285	486	514	528	551
Scarifier Depth (inches)	0-1.5"	0", 1.5" or 3" adjustable			
Number of Scarifiers	4	4	5	5	6
Tailgate Type	fixed				
Cutting Edges	2				

GRADING SCRAPERS

TRACTOR HP RANGE: 15 - 45 HP

GSS54P | 53-inch

GSS60P | 59-inch

GSS72P | 71-inch

- Three-point hitch: Limited CAT 1 and 1.
- Fourteen- and sixteen-inch box heights.



GSS54P

Woods grading scrapers are ideal for leveling, whether you're filling potholes in gravel driveways or removing a soil berm after installing field tile.

- Heavy-duty mast plate creates more down force for smoother surface and virtually eliminates washboard effect.
- Adjustable skid shoes and scarifiers increase performance.
- Tall side frames hold more material for leveling.
- Approachable leading edges and structural reinforcements keep scraper stronger for longer.
- Reversible/replaceable high-carbon cutting edges.

MODEL	GSS54P	GSS60P	GSS72P
Tractor Engine HP Range	15-30 hp	20-45 hp	
Hitch Category	Limited CAT 1 & CAT 1	CAT 1	
Working Width (inches)	53"	59"	71"
Overall Width (inches)	58"	64"	76"
Overall Length (inches)	42"	46"	
Box Height (inches)	14"	16"	
Weight with Scarifiers (lbs)*	409	553	655
Number of Scarifiers*	4		5
Scarifier Adjustments*	-4.0, -2.5, -1.0, +1.0	-2.5, -1.0, +0.5, +2.5	
Reversible Cutting Edge (inches)	0.5" x 6"		
Skid Shoe Adjustment	-0.75 to +0.75	-1.0 to +0.5	
Lower Hitch Design	clevis		

REAR BLADES

TRACTOR HP RANGE: UP TO 45 HP

RBS54 | 53-inch **RBS60P** | 59-inch
RBS60 | 59-inch **RBS72P** | 71-inch
RBS72 | 71-inch **RBS84P** | 83-inch

- Formed moldboard made from high-strength steel provides exceptional rigidity and pivots 360°.
- Reversible, bolt-on cutting edge adds to product life and enables easy replacement.
- Tilt and offset functions for advanced grading applications (premium models).
- Fast, easy, and safe hook-ups with ASABE quick-hitch compatibility.
- Optional skid shoes for depth control, optional parking stand for easier attachment, and optional end plates (premium models) for moving more material.



Ideal for grading dirt or gravel, cleaning up construction sites and moving snow.

RBS72

MODEL	RBS54	RBS60	RBS72	RBS60P	RBS72P	RBS84P
Tractor Engine HP	up to 30 hp			20-45 hp		
Tractor Hitch	Limited CAT 1 & CAT 1			CAT 1		
Working Width	53"	59"	71"	59"	71"	83"
Moldboard Height	12"			15"		
Moldboard Thickness	0.182" (grade 80 steel)			0.250" (grade 80 steel)		
Weight	134 lbs	142 lbs	156 lbs	268 lbs	288 lbs	308 lbs
Double-beveled, Reversible Cutting Edge Dimensions	0.375" x 6"			0.5" x 6"		
Angle Adjustments	5 positions up to 30°					
Offset Adjustments	—	—	—	up to 12" left or right		
Tilt Adjustments	—	—	—	up to 15°		
End Plates	—	—	—	optional		
Skid Shoes	optional					
Parking Stand	optional					
ASABE Quick-hitch Compatible	yes					

LANDSCAPE RAKES



Woods landscape rakes are built with rugged durability for tough clean-up jobs, as well as fine raking features for light-duty lawn care and general maintenance.

TRACTOR HP RANGE: UP TO 45 HP

- LRS52

52-inch
- LRS60

60-inch
- LRS72

72-inch
- LRS72P

72-inch
- LRS84P

84-inch
- LRS96P

96-inch

- Heavy pivot components increase product longevity.
- Large, structural tine beam channel holds alloy spring steel tines firmly.
- Fast, easy and safe hook-ups with ASABE quick-hitch compatibility.
- Optional gauge wheels allow better depth control and optional parking stand for easier attachment.

MODEL	LRS52	LRS60	LRS72	LRS72P	LRS84P	LRS96P
Tractor Engine HP Range	up to 30 hp			20-45 hp		
Tractor Hitch	Limited CAT 1 & CAT 1			CAT 1		
Working Width (inches)	52"	60"	72"	72"	84"	96"
Approximate Weight (lbs)	156	168	186	264	288	311
Pivot Angle	forward - 5 @ 15°, reverse - 5 @ 15°					
Tines Dimensions (inches)	5/16" x 1"					
Tines Spacing (inches)	1"					
Gauge Wheels	optional					
ASABE Quick-hitch Compatible	yes					
Parking Stand	optional					

POST HOLE DIGGERS

Ideal for landscapers, farmers, and municipalities planting trees and shrubs or installing decks and fencing in all soil types and conditions.



**Three sizes in
three duty classes**

PD35.30

TRACTOR PTO HP RANGE: 14 - 95 HP

PD25.20

PD35.30

PD95.50

- Heavy-duty welded construction and shear pin increase product longevity.
- Rugged gearbox with tapered roller bearings withstands shock load to handle the toughest projects.
- Wide range of auger bits ensures the best tool for any application.
- Positioning handle standard for easy operating.
- PTO driveline holder for easier set up.
- Six-year gearbox warranty.

MODEL	PD25.20	PD35.30	PD95.50
Tractor PTO HP Range	14-25 hp	20-35 hp	35-95 hp
Tractor Hitch	CAT 0, Ltd 1, & 1	CAT 1	CAT 1 & 2
Approximate Weight (without auger)	177 lbs	178 lbs	245 lbs
Drive Type	gearbox		
Tractor PTO Speed	540 rpm		
Shear Pin	standard		
Positioning Handle	standard		
Parking Stand	standard		
Auger (Diameter x Length)	6", 9", 12" x 36"	6", 9", 12" x 48"	6", 9", 12", 18", 24" x 48"
Auger Extension	optional (12")		

SNOW BLOWERS

TRACTOR PTO HP RANGE: 15 - 60 HP

SB54S | Tractor PTO HP range: 15 – 25 hp

SB64S | Tractor PTO HP range: 15 – 35 hp

SB74C | Tractor PTO HP range: 30 – 50 hp

SB84C | Tractor PTO HP range: 35 – 60 hp

- Designed specifically for sub-compact and compact tractors.
- Move large amounts of snow in a short time with working widths from 54 to 84 inches.
- Get more throwing force with less horsepower than single-stage snow blowers with Woods' two-stage design.
- Reinforced steel side plates offer exceptional durability.
- Make quick and easy adjustments using the optional hydraulic or electric chute rotator.

MODEL	SB54S	SB64S	SB74C	SB84C
Tractor PTO Horsepower	15–25 hp	15–35 hp	30–50 hp	35–60 hp
Tractor PTO Speed	540 rpm			
Tractor Hitch	CAT 1		CAT 1 & 2	
Working Width (inches)	54"	64"	74"	84"
Transport Width (inches)	56"	66"	76"	86"
Working Height (inches)	24"		26"	
Approximate Weight (lbs)	415	436	592	632
Driveline	CAT 3			
Driveline Protection	shear bolt			
Drive Type – Fan	gearbox			
Drive Type – Auger	gearbox & chain			
Number of Feeder Augers	1			
Auger Flighting (inches)	.31" x 2"			
Chute Rotation	270°			
Hydraulic Chute Rotator	optional			
Fan Diameter (inches)	22"		24"	
Fan Depth (inches)	6"		8"	
Adjustable and Replaceable Skids	yes			
Bolt-on Cutting Edge	no			
Telescoping 3-point Hitch	no			



SB84C

WOOD CLEAN UP



TSG50

The Woods PTO-powered stump grinders are built to perform — reducing tree stumps to mulch in minutes and grinding below ground level.

TRACTOR PTO HP RANGE: 15 - 50 HP

TSG50 | 20-inch cutting wheel

- Grinds stumps 16 inches above and below.
- Twenty-four tough, carbide steel teeth cut bi-directionally for increased productivity.
- Hinged debris shield allows easier grinding below ground level.

MODEL	TSG50
Tractor PTO HP Range	15-50 hp
Tractor Hitch	CAT 1 & 2
Cutting Wheel Diameter (inches)	20"
Cutting Wheel Speed	1,037 rpm
Cutter Tip Speed	5,428 fpm
Hub Torque (lbs / ft)	76-250
Approximate Weight (lbs)	545
Max Stump Height (inches)	16"
Max Cutting Depth (inches)	16"

SKID STEER

SKID STEER PALLET FORKS

MODELS

PFW2242S

PFW4442S

PF4448S

PFW4448S

- Walk-thru frame and low step offer easy access and optimum visibility
- High back guard with moveable walk-thru cross bar – relocate to fit your prime mover and application

High back guard with movable walk-thru cross bar – relocate to fit your prime mover and application

Standard clevis for lifting from a single point on the frame. Lift capacity equals fork tine capacity



PFW2242S

Certified, forged steel fork tines (ISO Class 2A) for strength and long life

Robotically welded for consistent high quality. Compatible with Skid Steer (ISO 24410), John Deere®, and ISO 23206 Quick Attach Systems.

MODEL	PFW2242S	PFW4442S	PF4448S	PFW4448S
Frame Type	walk-thru with full frame option	full frame	full frame	walk-thru with full frame option
Coupler System Compatibility	skid steer			
Operating Weight (lbs)	275	360	390	370
Fork Capacity at 19.7" from Tine Face (lbs)	2,200	4,400		
Fork Tine Dimensions (L x W x H)	42" x 3.2" x 1.2"	48" x 3.9" x 1.4"		
Fork Tine Spread Range	12" - 45" outside to outside			
Fork Tine Type	double hook lock down (ISO Class 2A)			
Clevis	standard			

SKID STEER BALE SPEARS

Alitec™ Bale Spears

Woods' Alitec™ single, double, and triple bale spears let you efficiently move and stack large round and square bales.

BS3044 | Single Spear

BS6044 | Double Spear

BS4032 | Triple Spear

All models are available for skid steer and tractor attachment systems:

- Durable drop-forged spears and high-strength steel frame provide longer product life.
- High carry load ratings increase performance.
- Optional step kit enables easier access to skid steer cabs.
- Optional vertical backstops on the triple bale spear allow stacking while transporting.
- Skid steer, ISO, or John Deere® Quick Attach available.



BS3044

MODEL	BS3044	BS6044	BS4032
Number of Spears	1	2	3
Number of Stabilizer Spikes	2	n/a	
Usable Spear Length	44"		32"
Spear Diameter	45mm		36mm
Maximum Carry Load (lbs)	3,000	6,000	4,000
Spear Material	drop-forged steel		
Frame Material	high-strength steel plate		
Frame Dimensions (Width x Height)	45" x 21"		57.5" x 21"
Quick Attach Systems	SAE J2513 Skid Steer, ISO 23206 Euro, John Deere 300/400/500 series loaders		
Step Kit	optional		
Vertical Backstops	n/a		standard

ALITEC™

INNOVATION DOESN'T JUST HAPPEN. IT TAKES YOU.

Ben Faivre, Polo, Illinois
Farmer and Power Team member

The superior design, durability and style of our equipment doesn't just come from Woods® team members. It's inspired and driven by passionate conversations, opinions and ideas from people like you.

You work the land every day. And you probably come up with a better way to get things done.

Why not share those ideas?

Join our Power Team customer panel and you may see your ideas come to life on our next new product. We will ask for your input on product features, new product ideas, advertising and more. We'll connect with you through surveys, phone interviews, or focus groups, depending upon your preferences. You'll get advance notice on breaking news. We may even ask you to test a product before it goes to market.

Help us develop innovative products you will love to use.



**POWER
TEAM**

Got ideas?

Join our Power Team customer panel at
woodsequipment.com/contact/power-team/
You have the power...





WOODS®

2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

WOODS®
GET AFTER IT

Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2021 Woods Equipment Company. All rights reserved. WOODS and Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

B061901 Revised July 2021