

WOODS

PRODUCT GUIDE 2020

With Over 70 Models
for Subcompact and
Compact Tractors



SUPERIOR DESIGN SUPERIOR DURABILITY SUPERIOR STYLE



SUPERIOR DESIGN SUPERIOR DURABILITY SUPERIOR STYLE

OUR NEW BRAND ICON REPRESENTS OUR RISING GLOBAL PRESENCE AS GREEN FIELDS AND ROADSIDES CONVERGE UNDER THE ORANGE ARC OF THE EARTH.

As you travel the world, you'll see Woods equipment mowing roadsides, trimming pathways, and maintaining yards, pastures and waterways. You'll also spy our attachments on livestock operations, croplands, and market gardens. Wherever you find hardworking people digging, growing, moving, and mowing, you'll find Woods.

Genuine Woods Parts

Maintain the quality and performance of your equipment with Woods genuine replacement parts. Available from your authorized Woods dealer.

Find a Woods Dealer

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at woodsequipment.com or call 800-319-6637.

WOODS®



TOP 5 IMPLEMENTS EVERY FARM NEEDS

When choosing implements, you simply need to know:

- your tractor's engine and PTO horsepower
- your tractor's wheel width

Now, match it to the horsepower requirements and widths listed in our specification charts to ensure you have enough power to operate the implement and that it's wide enough to cover your wheel tracks.



Rotary Cutter

Rotary Cutters are a must for large areas of brush and overgrown grass. Not well-suited to finish mowing, however, because they do not adjust to changes in topography. If cutting too low it could scrape soil.



Loader

A loader tackles the toughest material handling jobs with ease, whether it's dirt, snow, bales, stones or wood. Look for features like self-leveling, a quick attach system, and a curved boom to improve performance and make it easier to use.



Rear Blade

Ideal for grading driveways, cleaning up debris or snow removal. Ensure your blade is as wide or wider than tractor tires. Price dictates features. For example, more expensive blades have vertical and horizontal axis rotation for tipping and tilting flexibility. More economical blades have minimal adjustability, if any.



Rotary Tiller

Whether you need to control weeds in your garden, get a field ready for planting, or prepare ground for a food plot, a rotary tiller makes fast work of dirt work. Matching the tiller to your tractor horsepower is key: As a general rule, every foot of width on a tiller requires at least eight horsepower from your tractor.



Post Hole Digger

Post hole diggers make jobs like fencing, planting trees, or building a deck much easier. The auger is often sold separately, offering a choice of sizes for various projects. They work well in most conditions. However, for extremely hard soil choose a heavy-duty model.



Implements for Subcompact and Compact Tractors

We offer over 70 models for your Subcompact and Compact Tractors. Look for this icon throughout this product guide to find the right implement for your next project.

WOODS Batwing® Rotary Cutters	 7
Compact/Utility Tractor-duty 12 foot Batwing® Rotary Cutters	8
15-foot Batwing Rotary Cutters	9
20-foot Batwing Rotary Cutters	14
Single-spindle Rotary Cutters	 17
RC-Series Single-spindle Rotary Cutters	17
BrushBull™ Single-spindle Rotary Cutters	19
Ditch Bank Rotary Cutters	26
Multi-spindle Rotary Cutters	 28
Dual-spindle Rotary Cutters	30
Offset Dual-spindle Rotary Cutters	31
Belt-Driven Dual-spindle Rotary Cutters	33
Finish Mowers	 35
Rear-mount, Rear Discharge	35
Estate Model Turf Batwing Rear Discharge Finish Mower	39
Commercial Model Turf Batwing Rear Discharge	40
Finish Mowers	40
Zero-turn Mowers	 43
FZ Series Front-mount Zero-turn Mowers	43
Accessories & Attachments	45
Flail Shredders	 46
Snow Blowers	 48
Landscape Equipment	 51
Quick Hitch	51
Box Scrapers	52
Grading Scrapers	54
Rear Blades	56
Landscape Rakes	58
Post Hole Diggers	59
Wood & Brush Equipment	 60
Log Splitter	60
Stump Grinder	61
Tillage Equipment	 63
Rotary Tillers	64
Disc Harrows	68
Seeders & Cultipackers	 71
Food Plot Seeder	72
Precision Super Seeder	73
Compact Super Seeder	74
Cultipackers	78
Groundbreaker® Backhoes	 80
6.5-foot Backhoe	84
7.5-foot Backhoe	84
8.5-foot Backhoe	86
10-foot Backhoe	87

Skid Steer Attachments	 89
Bale Spears	90
Toothbars	90
Pallet Forks	91
Root & Scrap Grapples	92
Augers	93
Tillers	95
Pavement Saws	96
Rock Wheels	97
Vibratory Rollers	98
Cold Planers	99
General and Multi-Purpose Buckets	100
Compact Excavator Buckets And Couplers	101
Join the Woods Power Team	 102

MEET OUR TEAM

We'd like to introduce you to the people who drive our product design and engineering – the people who innovate day in and day out to make sure your attachments not only perform well, but are easy to use, safe to operate, and simple to maintain. As if that's not enough, our product design team has a penchant for style and revel in making bent, welded, painted metal look clean, fresh, and rugged.

**Superior Design.
Superior Durability.
Superior Style.**

Kurt Summers, Engineering Manager	6
Jason Carlson, Product Design Engineer	16
Kyle Macklin, Product Design Engineer	18
Angela Larson, Vice President, Marketing	34
Rob Dewey, Vice President, Engineering	42
Cory Sarver, Engineering Manager	50
Mark McLane, Engineering Manager	62
Todd Wehler, Product Design Engineer	70
Ron Parkins, Engineering Manager	79
Nick Peterson, Engineering Manager	88
Steve Slater, Product Design Engineer	94

A man with short dark hair, wearing safety glasses and a plaid button-down shirt, stands in a dark industrial setting. He is looking directly at the camera with a neutral expression. The background shows large, dark metal machinery, likely part of a cutter or mill.

**WE'RE PROUD TO
DESIGN CUTTERS
THAT DELIVER THE
BEST CUT QUALITY
AND THE BEST
FIT AND FINISH**

Kurt Summers Engineering Manager

When we began to design our new 15-foot Batwing® cutters in 2017, we started with a clean slate. We wanted to be bold and create something that not only met our high standards for performance and durability, but also looked modern and tough. We're proud to design cutters that deliver the best cut quality and the best fit and finish.



SUPERIOR DESIGN • SUPERIOR DURABILITY • SUPERIOR STYLE

BATWING® ROTARY CUTTERS

The customer-designed 15-foot series Batwing from Woods. It's more reliable, more durable, easier-to-use, easier-to-maintain and built to perform better. It's the flexwing cutter you always wanted, you just needed a company to build it.

Proven Durability

We not only build the toughest Batwing®, we build the only Batwing. But, don't just choose us for our name, choose us for the hours of testing in extreme conditions, the rugged sub-structure, and the industry-leading welding and paint standards. Choose Batwing for the sheer ability to tame the most unruly waterways, pastures, and roadsides.

Unbeatable Performance

Higher torque capacities, deeper decks, and our innovative wing design ensure you'll mow more material in less time. Woods Batwing cutters set the standards for cut quality, distribution, and ease of use, whether you're cutting brush or shredding stalks.



BATWING®

THE BEST BATWING YOU EVER DESIGNED.

COMPACT/UTILITY TRACTOR BATWING® ROTARY CUTTERS

BW12
Shown with standard
chain shielding



BATWING®

SPECIFICATIONS

MODEL	BW12
Tractor PTO HP	35 hp min.
Tractor Hitch	swivel clevis
Cutting Width	12 ft
Cutting Height Range (inches)	2 - 12"
Cutting Capacity (inches)	1.5"
Gearbox HP	160 hp - splitter / 75 hp - center and wing
Blade Tip Speed	14,300 fpm center / 14,900 fpm wing
Deck Thickness	12 ga, high-strength steel
Side Frame Thickness (inches)	7 ga
Deck Side Depth	11"
Weight (tongue/total)	750 lbs / 2450 lbs
Blade Dimensions	.5" x 4"
Blade Overlap	6"
Flex Wing	90° up, 22° down
Tires	laminated; new Ag; foam filled
Suspension	spring on center section
PTP Driveline (main/wing)	CAT 4 / CAT 3
Cutting Area Shielding	standard chain shielding
Warranty (cutter/gearbox)	year / 6 year limited

TRACTOR PTO HP RANGE: MINIMUM 35 HP

Model

BW12 | 12-foot Dual-wing Cutter for compact/utility tractors

Requiring a minimum of 35 hp, the BW12 gives you Woods quality and performance in a sleek, round-front design and our industry-leading sloped deck.

- Total weight 2,450 lbs with 750 lb tongue weight, ideal for use on lower horsepower compact and utility tractors.
- Twelve gauge, high-strength steel and smooth, sloped deck provide durability for long life.
- Easy hook-up reduces preparation time and frustration.
- Fully baffled deck, ensures better distribution of cut material, and the performance you expect.
- Six-year gearbox warranty including seals, for confidence in your purchase decision.
- Standard chain shielding, for added safety and peace of mind.
- Retail financing available to qualified buyers.



* **NOTE:** All Batwing® models pass all applicable safety standards for thrown object without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that standard chain shielding be used for extra protection.



THE NEW CUSTOMER-DESIGNED 15-FOOT SERIES BATWING®

RC

TRACTOR PTO HP RANGE: 45 - 200 HP

Model

BW10.50 | 10.5-foot flex-wing rotary cutter

BW15.50 | 15-foot flex-wing rotary cutter

The BW15.50 is ideal for cutting tall grasses and saplings up to 2 ½ inches in diameter.

Here are just a few features exclusive to Woods that rotary cutter users like you told us were important in our 15-foot series.

- New patent-pending driveline lift assistance system makes it easy to hook up. Standard on all models.
- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Greasable Quick-Change blade pins are easy to remove.



BW15.50
Shown with standard
chain shielding

Designed with input from users like you, the BW15.50, BW15.60, BW15.70, and their one-winged models, set a new industry standard for durability, reliability, performance and ease. We think you'll agree that it's the best Batwing ever.

SPECIFICATIONS

MODEL	BW10.50* / BW15.50
Tractor PTO HP	45-200
Cutting Height	2" - 15"
Cut Capacity	2.5" dia
Cutting Width	126" / 180"
Blade Tip Speed	15,000 fpm at 540 rpm 16,000 fpm at 1000 rpm
Weight	4,040 lbs / 4,340 lbs
Tongue Weight	1,150 lbs / 1,200 lbs
Center Deck / Wing Deck	10 gauge
Side Skirt Thickness	.25"
Side Skirt Depth	13"
Transport Width	96"
Stump Jumper	Round
Flex	90° up 22° down
Driveline Rating	CAT 6 CV main CAT 4 wing
Splitter Gearbox Rating	210 hp
Wings Gearbox Rating	200 hp
Output Shaft Size	2" dia
Gearbox Warranty	6 years
Options	<ul style="list-style-type: none"> ▪ double row chain shielding ▪ dual wheels ▪ LED lights

*single wing

THE NEW CUSTOMER-DESIGNED 15-FOOT SERIES BATWING®



**TRACTOR PTO HP RANGE:
55 - 275 HP**

Models

BW10.60 | 10.5-foot flex-wing rotary cutter

BW15.60 | 15-foot flex-wing rotary cutter

The BW15.60 easily powers through tall brush and trees up to 4 inches in diameter.

**TRACTOR PTO HP RANGE:
65 - 300 HP**

Models

BW10.70 | 10.5-foot flex-wing rotary cutter

BW15.70 | 15-foot flex-wing rotary cutter

The rugged BW15.70 can tame the harshest conditions – heavy brush and trees up to 4.5 inches in diameter. Ideal for professional and contract cutting.

Sloped Deck

Smooth and sloped seven-gauge steel decks shed water and debris; deck design and baffling helps recut material, ensuring a finer shred and more even distribution.

Gearboxes

Massive, heavy-duty gearboxes deliver more cutting power and performance with a six-year limited warranty.



BW15.60

Shown with standard chain shielding

THE NEW CUSTOMER-DESIGNED 15-FOOT SERIES BATWING®

RC

SPECIFICATIONS		
MODEL	BW10.60* / BW15.60	BW10.70* / BW15.70
Tractor PTO HP	55-275	65-300
Cutting Height	2" - 15"	
Cut Capacity	4" dia	4.5" dia
Cutting Width	126" - 180"	
Blade Tip Speed	15,700 fpm at 540 rpm 16,000 fpm at 1,000 rpm	
Weight	4,400 lbs / 4,600 lbs	5,500 lbs / 5,290 lbs
Tongue Weight	1,350 lbs	1,490 lbs
Center Deck / Wing Deck	7 gauge	1/4"
Side Skirt Thickness	.25"	
Side Skirt Depth	13"	
Transport Width	96"	
Stump Jumper	Round	
Flex	90° up / 22° down	
Driveline Rating	CAT 6 CV main CAT 4 wing	CAT 6 CV main CAT 5 wing
Splitter Gearbox Rating	275 hp	
Wings Gearbox Rating	225 hp	
Output Shaft Size	3" dia	
Gearbox Warranty	6 years	
Options	<ul style="list-style-type: none"> ▪ double row chain shielding ▪ dual wheels ▪ LED lights ▪ shredding kit ▪ deck ring ▪ spring axle ▪ full walking tandem 	<ul style="list-style-type: none"> ▪ double row chain shielding ▪ dual wheels ▪ LED lights ▪ shredding kit ▪ deck ring ▪ spring axle ▪ full walking tandem

*single wing

- New patent-pending driveline lift assistance system makes it easy to hook up.
- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Greasable Quick-Change blade pins are easy to remove.

Plus,

- Beefy, heavy-duty skid shoes prevent gouging and protect the deck.
- Strategically placed, welded baffles cut and distribute debris evenly.
- Center and wing decks feature high-strength 7 gauge steel (.60) or .25 inch thick steel (.70) for added durability.
- The side skirt is 13 inches deep and made of .25 inch thick steel for greater material capacity and the strength to manage it.
- For added toughness in extreme conditions, the .60 and .70 models have a 3-inch gearbox output shaft and optional deck ring.
- Other options include LED lights, double row chain shielding, dual wheels, and for the .60 and .70 models, a shredding kit for added versatility.

Skid Shoes

Bolt-on, heavy-duty skid shoes with an "approachable" leading edge reduce sod damage when turning.



BW15.70
Shown with standard chain shielding

THE NEW CUSTOMER-DESIGNED 15-FOOT SERIES BATWING®

SUPERIOR DURABILITY

We not only build the toughest Batwing, we build the only Batwing. But, don't just choose us for our name, choose us for the hours of testing in extreme conditions, the rugged sub-structure, and the industry-leading welding and paint standard. Choose Batwing for the sheer ability to tame the most unruly fields, waterways, pastures and roadsides.

PTO Lift Assist

New patent-pending driveline lift assistance system makes it easy to hook up – and is standard on all models.

Sloped Deck


Smooth, sloped steel decks shed water and debris.

Integrated Chain Shielding

Chain shielding is integrated with the frame to prevent damage.

Rounded Wings & Curved Leading Edge

Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.

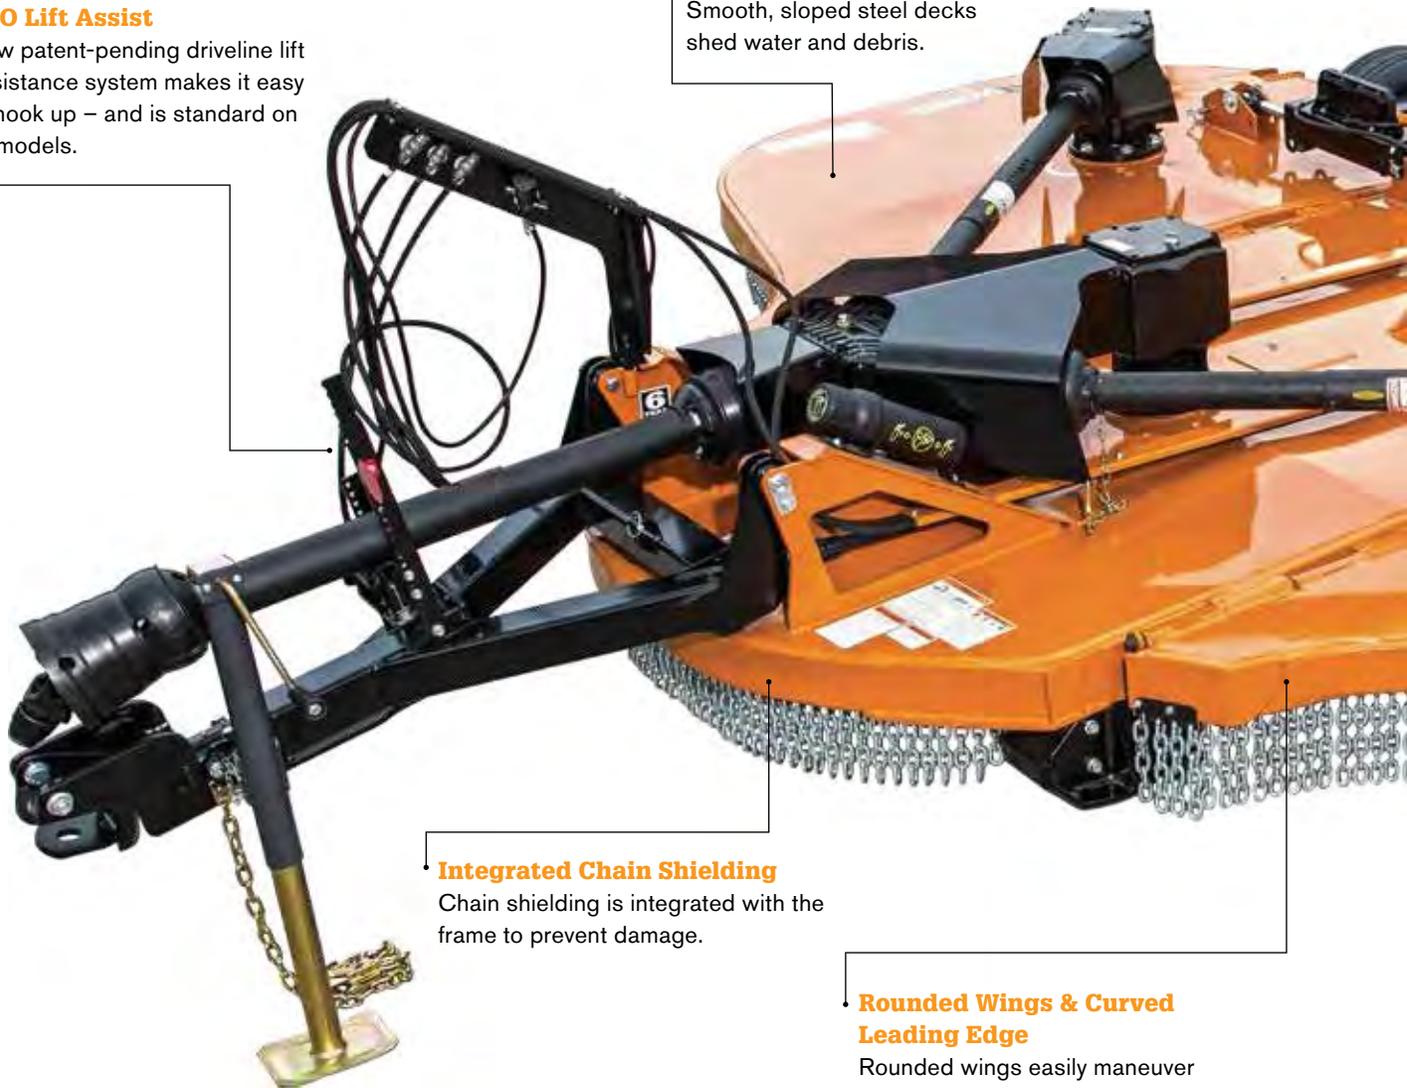

SUPERIOR DESIGN

The Batwing is designed with a high torque capacity, a deep deck with welded baffles, and our easy tractor hook-up so you will get to work quickly and mow more material in less time. Woods Batwing cutters set the standard for cut quality, distribution and ease of use, whether you're cutting brush or shredding stalks.

THE NEW CUSTOMER-DESIGNED 15-FOOT SERIES BATWING®

RC

SUPERIOR STYLE

Woods was the first to introduce a smooth, sloped deck that sheds debris. Raising components off the deck makes clean-up easy and covering hoses protects from wear and damage. Bolt-on, heavy-duty skid shoes with an 'approachable' leading edge reduce sod damage when turning and protect the deck from damage.



Easy Maintenance

Greasable Quick-Change blade pins are easy to remove.



Extremely Strong Structure


A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.

Heavy-duty Gearboxes

Massive, heavy-duty gearboxes deliver more cutting power and performance.



New, advanced gearbox seal technology, designed for hard conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.

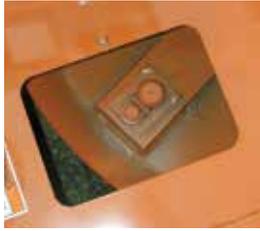


Quick-change Blade System

Woods' exclusive Quick-Change blade system allows for easy changing of blades from the top of the deck.

Greasable Pivot Pins

Greasable pivot points are located on turnbuckle and axle arms to increase durability and reduce wear.

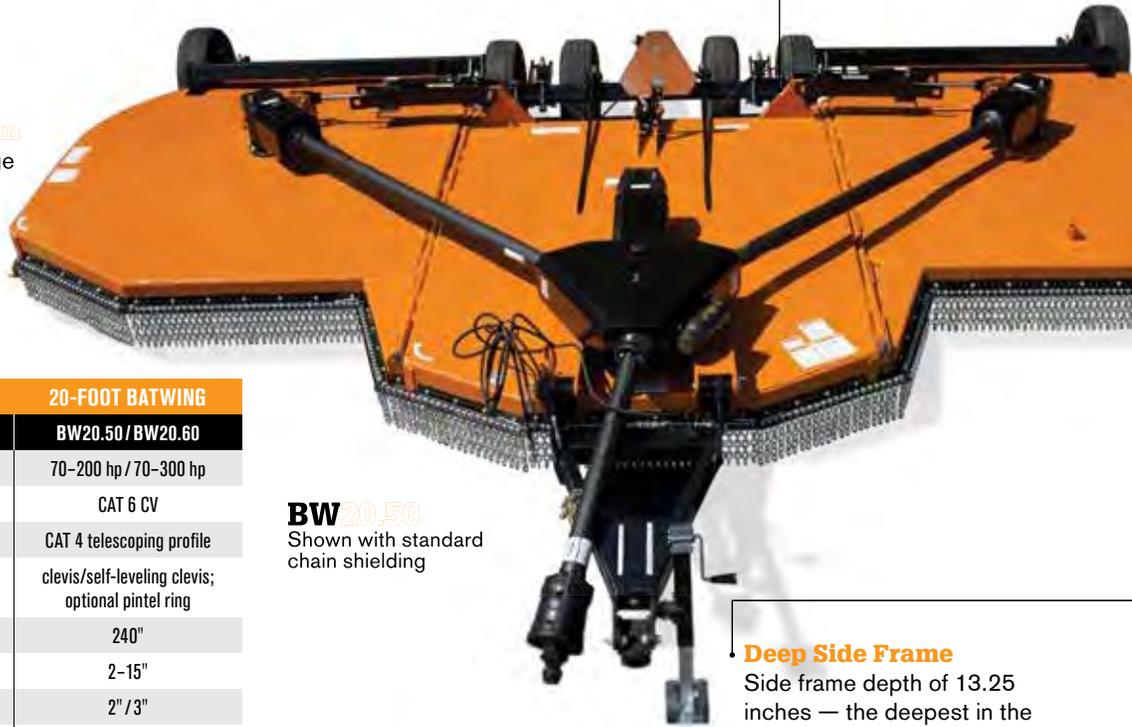

BW20.50

Shown with standard chain shielding

Deep Side Frame

Side frame depth of 13.25 inches — the deepest in the industry.

SPECIFICATIONS	20-FOOT BATWING
MODEL	BW20.50 / BW20.60
Tractor PTO HP Range	70–200 hp / 70–300 hp
Main Driveline	CAT 6 CV
Wing Driveline	CAT 4 telescoping profile
Tractor Hitch	clevis/self-leveling clevis; optional pintel ring
Cutting Swath (inches)	240"
Cutting Height (inches)	2–15"
Cutting Capacity Diameter (inches)	2" / 3"
Side Frame Depth (inches)	13.25"
Tractor PTO rpm	540 or 1,000
Transport Width (inches)	123"
Overall Width x Length (inches)	250" x 198"
Deck Type	smooth, sloped
Deck Thickness (inches)	.135"
Side Frame Thickness (inches)	.25"
Hinges / Hinge Rod Diameter	1"
Weight (lbs)	6,510 / 6,600
Number of Gearcases	4
Vertical Shaft Size (inches)	2" / 2.38"
Splitter/Wing HP	250 / 120 / 250 / 205 hp
Blade Thickness (inches)	.5"
Blade Width (inches)	4"
Blade Type	hi-lift, flat or shredder
Blade Overlap (inches)	6"
Blade Tip Speed at 540 rpm	15,450 fpm
Blade Tip Speed at 1,000 rpm	16,300 fpm
Material Flow System	standard baffles
Stump Jumper Type	standard round-welded
Hydraulics Wing Flex	90° up, 22° down
Suspension	standard spring suspension or tandem spring arms
Wheel Type	15" rims; 21" laminated; 24" new Ag; or 29" used aircraft
Cutting Area Shielding	single or double chain
Gearbox Warranty (limited)	6 years

TRACTOR PTO HP RANGE:
70 - 200 HP

Model

BW20.50 | 20-foot Dual-wing Cutter

- Main driveline: CAT 6 CV.
- Cuts brush up to 2 inches in diameter.
- Walking tandem axle available.


TRACTOR PTO HP RANGE:
70 - 300 HP

Model

BW20.60 | 20-foot Dual-wing Cutter

- Maintain driveline: CAT 6 CV.
- Cuts brush up to 3 inches in diameter.
- Side frame depth of 13.25 inches — the deepest in the industry.
- Optional shredding kit.

* **NOTE:** All Batwing® models pass all applicable safety standards for thrown object without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that chain shielding be used for extra protection.

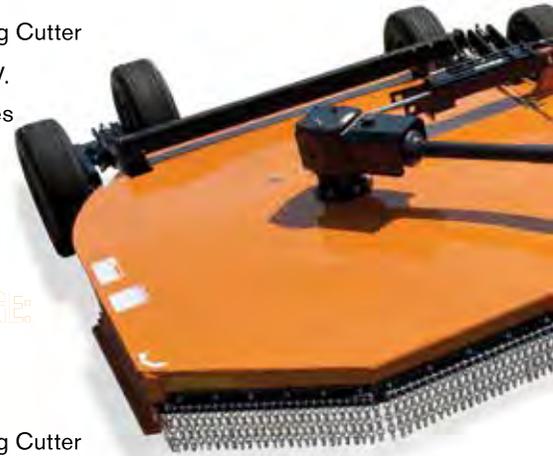

20-FOOT BATWING® ROTARY CUTTERS

RC

**TRACTOR PTO HP RANGE:
70 - 300 HP**

Models

BW13.70 | 13.5-foot Single-wing Cutter (162-inch cutting swath)

BW20.70 | 20-foot Dual-wing Cutter (240-inch cutting swath)

- Main driveline: CAT 6 CV.
- Deck plate has two layers of .135" plate.
- Cuts brush up to 4 inches in diameter.
- Side frame depth of 12.5 inches.
- Optional dual tires available for wings.
- Optional shredder kit or optional blade ring.
- Six-year gearbox limited warranty.

BW 20.60
Shown with standard
chain shielding



Features a double deck, built extra heavy to handle a host of rugged applications.

SPECIFICATIONS	20-FOOT BATWING	
	BW13.70*	BW20.70
Tractor PTO HP Range	70-300 hp	
Main Driveline	CAT 6 CV	
Wing Driveline	CAT 5	
Tractor Hitch	self-leveling swivel clevis; optional pintle ring	
Cutting Swath (inches)	162"	240"
Cutting Height (inches)	2-15"	
Cutting Capacity Diameter (inches)	4"	
Side Frame Depth (inches)	12.5"	
Tractor PTO rpm	540 or 1,000	
Transport Width (inches)	100"	123"
Overall Width x Length (inches)	171" x 198"	250" x 198"
Deck Type	smooth, sloped double-deck	
Deck Thickness (inches)	.135" / .135" upper / lower	
Side Frame Thickness (inches)	.25"	
Hinges / Hinge Rod Diameter	1" full length	
Weight (lbs)	8,500	7,740
Number of Gearcases	3	4
Vertical Shaft Size (inches)	2.38"	
Splitter Wing HP	250 / 210 hp	
Blade Thickness (inches)	.5"	
Blade Width (inches)	4"	
Blade Type	hi-lift, flat	hi-lift, flat or shredder kit
Blade Overlap (inches)	6"	
Blade Tip Speed at 540 rpm	15,450 fpm	
Blade Tip Speed at 1,000 rpm	16,650 fpm	
Material Flow System	standard baffles	
Stump Jumper Type	standard round-welded	
Hydraulics Wing Flex	left or right wing - 90° up, 22° down	90° up, 22° down
Suspension	standard spring suspension or optional tandem spring arms	
Wheel Type	15" rims; 21" laminated; 24" new Ag; or 29" used aircraft	
Cutting Area Shielding	single or double chain	
Gearbox Warranty (limited)	6 years	

*Single-wing

A man with glasses and a checkered shirt stands in a factory setting, smiling. He is positioned next to a large, curved metal component, likely a rotary cutter blade. The background is dark and industrial.

SOME OF OUR BEST SOLUTIONS WERE BORN FROM CUSTOMERS' FRUSTRATIONS

Jason Carlson Product Design Engineer

Our customers told us that changing blades is a frustrating, time-consuming job in maintaining their rotary cutters. The design team started thinking about what it would take to remove blade pins more quickly. We tested a few ideas and in collaborating with manufacturing, we discovered we could machine a groove in the crossbar and drill a hole into our patented Quick-Change pin. Together, the system distributes lubricant every time a customer greases the pin during routine maintenance.



SUPERIOR DESIGN ■ SUPERIOR DURABILITY ■ SUPERIOR STYLE

RC-SERIES SINGLE-SPINDLE ROTARY CUTTERS

Woods' RC-Series Single-spindle is ideal for getting the most from your compact or subcompact tractor. Built with high-strength steel, Woods confidently stands behind this product with our three-year gearbox warranty.

**TRACTOR PTO HP RANGE:
15 - 50 HP**

Models

RC42.20 | 42-inch **RC48.20** | 48-inch
RC60.20 | 60-inch **RC72.20** | 72-inch

- Four cutting widths to fit the size of your job and paint colors to match your tractor.
- Unique smooth, sloped decks are easy to clean and reduce build-up of water and debris.
- Stump jumpers are standard on all models for added driveline protection.
- High-strength steel and quality parts provide dependable service year-after-year.
- Three-year gearbox warranty is one of the best in the industry.



**RC42.20 /
RC48.20**



RC72.20
Shown with optional
chain shielding

SPECIFICATIONS		SINGLE-SPINDLE ROTARY CUTTERS			
MODEL	RC42.20	RC48.20	RC60.20	RC72.20	
Tractor PTO HP	15-40 hp		20-50 hp		
Hitch Category / Type	CAT 1 cantilevered				
Cutting Width (inches)	42"	48"	60"	72"	
Cutting Height Range (inches)	2"-9"				
Cutting Capacity (inches)	1"				
Gearbox Horsepower	50 hp				
Blade Tip Speed	11,460 fpm	13,100 fpm	13,620 fpm	14,340 fpm	
Side Frame Depth (inches)	7"				
Approximate Weight (lbs)	360	410	494	575	
Blade Dimensions (inches)	.5" x 3"				
Blade Carrier	oval stump jumper				
Tail Wheel	4" x 16" laminated				
Driveline Protection	shear-bolt or slip-clutch				
Driveline Holder	yes, on deck				
Tractor PTO Speed (rpm)	540				
Quick-hitch Ready	yes				
Cutting Area Shielding	belt standard; chain shielding optional				
Warranty (cutter/gearbox)	1 year / 3 years				



**WE WANT TO
CREATE PRODUCTS
WITH THE SET OF
FEATURES OUR
CUSTOMERS VALUE**

Kyle Macklin Manufacturing Engineer

We use a disciplined development process driven by what customers value. We look at each individual feature and spec of a product and make sure that every element is something that's going to be beneficial to the customer. We want to make products that are going to have the right features at a price point that the customer's willing to pay for, and thus create the best value.



BRUSHBULL™ SINGLE-SPINDLE ROTARY CUTTERS

Put our products to the test in your own back yard. Rugged, dependable and productive — Woods rotary cutters are designed for the extremes of real world use.

Start at the Beginning

Since 1946, Woods has grown to become the undisputed cutter expert. This legacy began with development of the first tractor-mounted rotary cutter and continues today with unmatched product innovations such as greasable Quick-change blade pins and a smooth, sloped deck that sheds debris.

And yet, we still go back to customers like you before redesigning a product. Erasing preconceptions, we listen — really listen — to what you need and value. Then, Woods Engineers go to work creating a product that you will love to use.

Finally, we make it just a bit more durable, kick up the performance and add style, because that's what people expect from Woods.

Newly redesigned, the top-selling Woods BrushBull™ is easy to use and maintain, delivers superior cut quality and performance, and looks good doing it. Year after year after year.



BRUSHBULL SINGLE-SPINDLE ROTARY CUTTERS

Our most popular models are ideal for clearing brush along fence rows, maintaining miles of interstate highways, and cutting overgrown grass, weeds and brush wherever you need to tame the land.

TRACTOR PTO HP RANGE: 15 - 90 HP

Models

BB48.30 | 48-inch

BB60.30 | 60-inch

BB72.30 | 72-inch

- Three-point hitch: CAT 1.
- Cuts brush up to two inches in diameter and nine inches tall.
- Six-year limited gearbox warranty includes the seals.
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.



TRACTOR PTO HP RANGE: 35 - 90 HP

Models

BB84.40 | 84-inch

- Three-point hitch: CAT 1 & 2.
- Cuts brush up to two inches in diameter and twelve inches tall.
- Six-year limited gearbox warranty includes the seals.
- Eleven-inch deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Choose an optional dual tailwheel or check chain, for adjusting the mowing height.



BB48.30

Shown with optional
chain shielding

BRUSHBULL SINGLE-SPINDLE ROTARY CUTTERS

RC



SPECIFICATIONS		BRUSHBULL™ SINGLE-SPINDLES			
MODEL	BB48.30	BB60.30	BB72.30	BB84.40	
Tractor PTO HP	15-50 hp	25-50 hp	30-75 hp	35-90 hp	
Hitch Category/Type	CAT 1 clevis			CAT 1 & 2 clevis	
Cutting Width (inches)	48"	60"	72"	84"	
Total Weight (lbs)	590	672	811	1,041	
Cutting Capacity Diameter (inches)	2"	2"	2"	2"	
Cutting Height (inches)	1" - 9"			2" - 12"	
Transport Width (inches)	55"	67"	79"	91"	
Overall Length (inches)	86"	99"	111"	124"	
Tractor PTO Speed (rpm)	540			540	
Quick-hitch Compatible	yes			yes	
Rear Bumper	Z-channel			Z-channel	
Frame & Deck Support	3" x 3" tube			3" x 3" tube	
Deck Construction	smooth top, sloped			smooth top, sloped	
Skid Shoes	full-length, replaceable			full-length, replaceable	
Deck Thickness	12 ga (.105")		11 ga (.120")	11 ga (.120")	
Side Frame Thickness (inches)	10 ga (.135")			10 ga (.135")	
Side Frame Depth (inches)	10.5"			11.6"	
Gearbox Warranty	6-year limited			6-year limited	
Gearbox HP	65 hp	65 hp	75 hp	90 hp	
Output Shaft Diameter (inches)	1.57"			2"	
Blade Tip Speed	13,000 fpm	14,335 fpm	14,963 fpm	15,086 fpm	
Blade Dimensions (inches)	.50" x 4"			.50" x 4"	
Blade Pin Diameter (inches)	1.50"			1.50"	
Blade Carrier	oval stump jumper			oval stump jumper	
Driveline Protection	slip-clutch			slip-clutch	
Options	check chain			check chain, dual tailwheel	



BB72.30
Shown with optional chain shielding

BRUSHBULL SINGLE-SPINDLE ROTARY CUTTERS

SUPERIOR DESIGN

Customers like you told us what's important in a single-spindle cutter. Then, we redesigned our premium BrushBull cutter to meet – and exceed – your needs. An adjustable drive lift hanger and Quick-hitch compatibility make it easy to attach. A large access window on top of the deck and our exclusive, greasable Quick-change blade pins make blade changes easy, even in the field. But, you're not sacrificing performance for ease. A deep deck, large half-inch by four-inch blade and welded baffle work together, creating a strong suction that lifts, then evenly cuts and distributes large amounts of material.

SUPERIOR DURABILITY

Choose a BrushBull for the hours of testing in extreme conditions, and a Z-shaped, high-strength steel bumper that's twice as thick as competitive models, for added durability when backing over tough brush. Or, choose Woods for the advanced gearbox seal technology that's so good our 6-year limited warranty includes the seals. That's worry-free reliability.

SUPERIOR STYLE

Woods was the first to introduce a smooth, sloped deck that sheds debris. And, raising components off the deck makes clean-up easy. Front corners angle back to give operators more room between the tractor tire and cutter.



SUPERIOR DESIGN
SUPERIOR DURABILITY
SUPERIOR STYLE

Adjustable driveline hanger makes it easier to attach, and is standard on all models.

Corners angle back to give operators more room between the tractor tire and cutter.

Full-length, bolt-on skid shoes protect the deck and are easy to change. Adjust the height on heavy-duty models.

Smooth, sloped deck sheds debris and is easy to clean.



BRUSHBULL SINGLE-SPINDLE ROTARY CUTTERS

RC



New, advanced gearbox seal technology is designed for hard conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.

Greasable Quick-change blade pins are easy to maintain and remove.



A large blade access hole makes it easy to reach our exclusive Quick-change pins and quickly change the blade from the top of the deck.



BB60.30
Shown with optional chain shielding

High-strength steel bumper is 2-times thicker than competitive models, with a Z-channel frame for added durability when backing over tough brush.

SUPERIOR DESIGN, DURABILITY AND STYLE UNDER THE DECK, TOO!



Rear baffle, standard on all models, concentrates the airflow and ensures cut material is distributed evenly.

The large 1/2-inch by 4-inch blades and extra deep deck precisely cut large amounts of material.

A beefier, heavy-duty crossbar and 1/4-inch steel stump jumper protect the undercarriage from extreme conditions.

The frame is built with full-length 3-inch by 3-inch tubes and channels for extra durability.

BRUSHBULL SINGLE-SPINDLE ROTARY CUTTERS

TRACTOR PTO HP RANGE: 30 - 120 HP

Models

BB60.50 | 60-inch

BB72.50 | 72-inch

BB84.50 | 84-inch

- Three-point hitch: CAT 1 & 2, CAT 2 & 3.
- Cuts brush up to three inches in diameter and twelve inches tall.
- Six-year limited gearbox warranty includes the seals.
- High-strength 10 gauge steel deck manufactured for tough conditions.
- A deep deck, with half-inch by four-inch blades and rear baffling work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Options include round stump jumper, check chains for height adjustments, and dual tail wheel on model BB84.50.

SPECIFICATIONS	BRUSHBULL™ SINGLE-SPINDLES		
	BB60.50	BB72.50	BB84.50
Tractor PTO HP	30-150 hp		40-150 hp
Hitch Category/Type	CAT 1 & 2 clevis		CAT 2 & 3 clevis
Cutting Width (inches)	60"	72"	84"
Total Weight (lbs)	975	1125	1335
Cutting Capacity Diameter (inches)	3"		
Cutting Height (inches)	2" - 12"		
Transport Width (inches)	67.3"	79.3"	91.3"
Overall Length (inches)	100v	112"	124"
Tractor PTO Speed (rpm)	540		
Quick-hitch Compatible	yes		
Rear Bumper	Z-channel		
Frame & Deck Support	3" x 3" tube		
Deck Construction	smooth top, sloped		
Skid Shoes	full-length, replaceable		
Deck Thickness	10 ga (.135")		
Side Frame Thickness (inches)	0.25"		
Side Frame Depth (inches)	12.7"		
Gearbox Warranty	6-year limited		
Gearbox HP	150 hp		
Output Shaft Diameter (inches)	2"		
Blade Tip Speed	15,525 fpm	15,900 fpm	16,000 fpm
Blade Dimensions (inches)	.50" x 4"		
Blade Pin Diameter (inches)	1.5"		
Blade Carrier	diamond stump jumper, optional round		
Driveline Protection	slip-clutch		
Options	check chains, round stump jumper	check chains, round stump jumper, dual tailwheel	

Count on the integrity of the BrushBull frame

- Stress points are tied to full-length 3-inch by 3-inch tubes, not on the deck plate, for added stability.
- A full frame design means strength and durability are built into every BrushBull from the frame out.
- The rear bumper is a Z-shaped channel that's two-times thicker than competitive models, adding structural integrity when backing over brush.



BB72.50
BrushBull frame

BRUSHBULL SINGLE-SPINDLE ROTARY CUTTERS

RC

TRACTOR PTO HP RANGE: 40 - 200 HP

Models

BB60.60 | 60-inch

BB72.60 | 72-inch

BB84.60 | 84-inch

- Three-point hitch: CAT 1 & 2, CAT 2 & 3.
- Cuts brush and saplings up to four inches in diameter and twelve inches tall.
- Six-year limited gearbox warranty includes the seals.
- High-strength 10 gauge steel deck is made for extreme conditions.
- Deck is 12.7 inches deep, with half-inch by four-inch blades, and rear baffling that work together to evenly cut and distribute large amounts of material, for a superior cut quality.
- Options include round stump jumper, check chains for height adjustments, and dual tail wheel on model BB84.60.

SPECIFICATIONS	BRUSHBULL™ SINGLE-SPINDLES		
	MODEL	BB60.60	BB72.60
Tractor PTO HP	40-150 hp	50-210 hp	65-210 hp
Hitch Category/Type	CAT 1 & 2 clevis		CAT 2 & 3 clevis
Cutting Width (inches)	60"	72"	84"
Total Weight (lbs)	1045"	1210"	1440"
Cutting Capacity Diameter (inches)	4"		
Cutting Height (inches)	2" - 12"		
Transport Width (inches)	67.3"	79.3"	91.3"
Overall Length (inches)	100"	112"	124"
Tractor PTO Speed (rpm)	540		
Quick-hitch Compatible	yes		
Rear Bumper	Z-channel		
Frame & Deck Support	3" x 3" tube		
Deck Construction	smooth top, sloped		
Skid Shoes	adjustable height full-length, replaceable		
Deck Thickness	10 ga (.135")		
Side Frame Thickness (inches)	0.25"		
Side Frame Depth (inches)	12.7"		
Gearbox Warranty	6-year limited		
Gearbox HP	210 hp		
Output Shaft Diameter (inches)	3"		
Blade Tip Speed	13,570 fpm	13,945 fpm	14,250 fpm
Blade Dimensions (inches)	.50" x 4"		
Blade Pin Diameter (inches)	1.5"		
Blade Carrier	diamond stump jumper, optional round		
Driveline Protection	slip-clutch		
Options	check chains, round stump jumper	check chains, round stump jumper, dual tailwheel	



BB72.60
Shown with standard chain shielding

DITCH BANK ROTARY CUTTERS



DBH6.31
Shown with standard
chain shielding

The hydraulic-drive Woods Ditch Bank Rotary Cutter is a rugged and versatile tool, precision-engineered for maintaining ditches, roadways, ponds and waterways.

**TRACTOR PTO HP RANGE:
60 - 150 HP**

Models

DBH5.31 | 60-inch **DBH6.31** | 72-inch

- Highest-rated cutting horsepower in its class – full 40 hp at cutting head.
- Only 6-foot model on the market – Choose 5' or 6' model.
- Narrow 119" transport width – no frame overhang, even on 6' units.
- Fixed counter weight position does not extend beyond width of road lane.
- Cuts at almost any angle with +/- 90° flex (90° up, 90° down).
- Optional hydraulic cooling system for extreme conditions.
- Cuts vegetation up to 2" in diameter.
- Quick-change blade system allows easy blade changes from top of the deck.
- Quick-hitch ready.

SPECIFICATIONS		HYDRAULIC DITCH BANK CUTTERS	
MODEL	DBH5.31	DBH6.31	
Tractor PTO HP Range	60 - 150 hp		
Tractor PTO speed (RPM)	540 / 1,000		
Cutting Width	60"	72"	
Cutting Capacity Diameter	2"		
Cutting Height	2" - 10"		
Transport Width	119"		
Side Shift	30"		
Reach: Tractor Center to Outside of Cutter	158"	168"	
Overall Length	72"	84"	
Flex Range Angles	90° up, 90° down		
Approximate Weight (without hyd oil)	2,000 lbs	2,300 lbs	
Tractor Weight Min.	6,000 lbs		
3-point Hitch Lift Capacity Min.	2,500 lbs		
Max HP at Cutting Head	40		
Hitch	CAT 2/3, CAT 2 & 3 QH		
Blades (in.)	1/2" x 4"		
Blade Tip Speed at 540 RPM	15,800 fpm	18,900 fpm	
Blade Tip Speed at 1000 RPM	16,000 fpm	17,700 fpm	
Cutter Deck Thickness	0.135" (10 gauge)		
Deck Side Depth	9.4"	9.5"	
Side Frame Thickness	0.135"		
Shielding	Chain Standard		
Gauge Wheels	optional		
Tail Wheel	optional - frame mounted		
Cooler	optional		
Hydraulic Tank Capacity	35-Gallon		



MULTI-SPINDLE ROTARY CUTTERS

Durable and easy-to-use cutters for both brush cutting and crop shredding.



MULTI-SPINDLE ROTARY CUTTERS

RC

Easy to Use

The proven leader in the cutter business delivers a full line of durable easy-to-use rotary cutters. Choose our 30-, 40-, 50- or 60-series model loaded with features that help you work efficiently and effectively – whatever you're cutting or shredding.

- A floating hitch allows the cutter to follow the terrain. Cross steep inclines and ditches with ease.
- Changing cutting blades is a snap with the exclusive Woods Quick-Change blade pin system, standard on all gear-driven dual-spindle cutters. 50-Series models also feature a large blade access window in the deck.
- The 50-series offers variable wheel spacing so you can adjust the wheels for row crops.

Hard to Break

You'll rely on your Woods rotary cutter for years because we still manufacture them with the same dependable quality that we've built in since 1946.

- Woods gearboxes feature heat-treated, alloy steel gears that stand up to the demands of rotary cutting.
- Sloped-top decks shed water and debris to prevent rust and corrosion and wrap around a heavy steel superstructure.¹
- Spring cushion axles reduce stress spikes to keep your Woods rotary cutter delivering high-performance cutting.²
- Factory balanced stump jumpers are standard. Avoid hazards and save your blades from wear and tear.¹

1) N/A on belt-driven models

2) N/A on DS8.30 and DS10.40




DS10.40
shown with chain
shielding

CV Drive •
Less maintenance,
smoother operation

RC MULTI-SPINDLE ROTARY CUTTERS

Durable and easy-to-use cutters for both brush cutting and crop shredding.

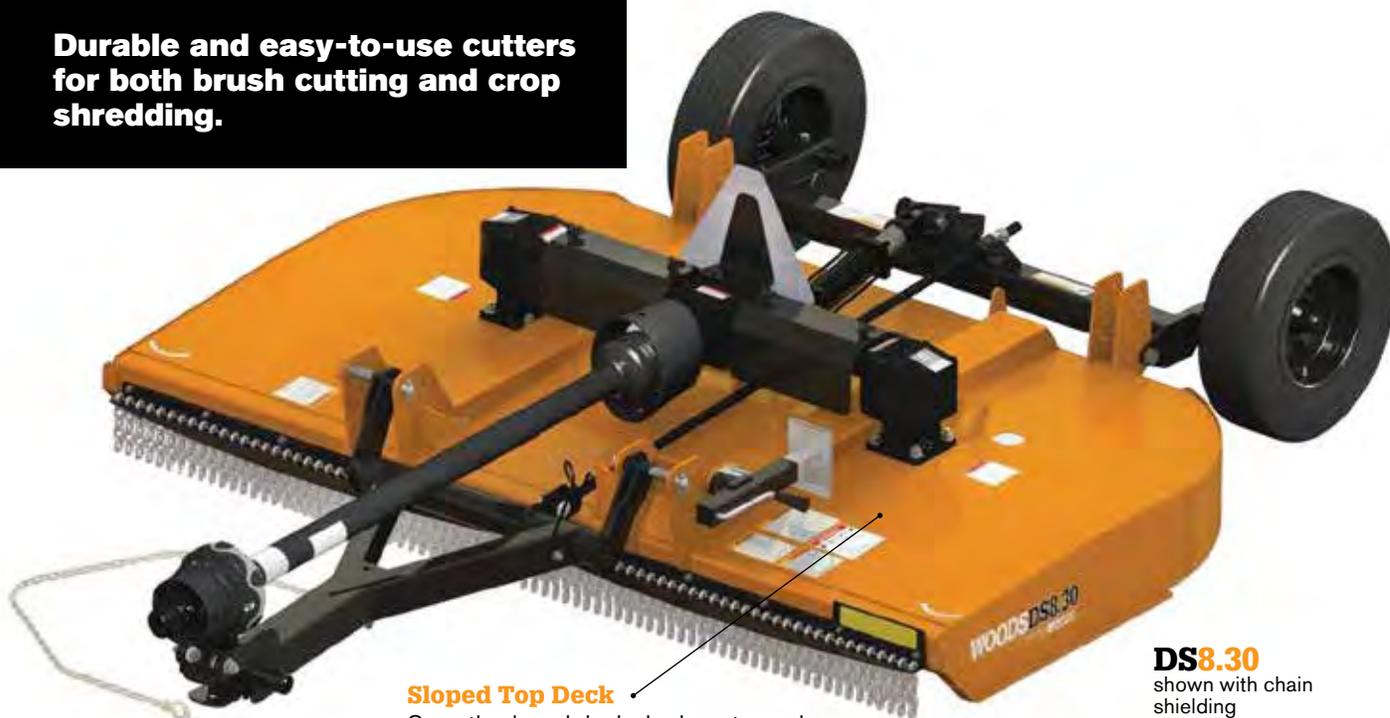

Sloped Top Deck
Smooth, sloped deck sheds water and debris to prevent rust and corrosion.

DS8.30
shown with chain shielding

30- and 40-Series Dual-Spindle Models

**TRACTOR PTO HP RANGE:
35 - 75 HP**

DS8.30 | 96-inch, pull-type

**TRACTOR PTO HP RANGE:
40 - 120 HP**

DS10.40 | 120-inch, pull-type

**TRACTOR PTO HP RANGE:
35 - 120 HP**

MDS8.30 | 96-inch, 3-point mounted

MDS10.40 | 120-inch, 3-point mounted

- Cuts light brush up to 1.5 inches (30-Series) to 2 inches (40-Series) in diameter.
- Six-year limited gearbox warranty.

SPECIFICATIONS		MULTI-SPINDLE ROTARY CUTTERS	
MODEL	DS8.30 (PULL-TYPE) MDS8.30 (3-POINT MOUNTED)	DS10.40 (PULL-TYPE) MDS10.40 (3-POINT MOUNTED)	
Minimum Tractor PTO HP	35 hp pull-type 45 hp mounted	40 hp pull-type 60 hp mounted	
Hitch Category / Type	pull-type: pivoting clevis mounted: CAT 1 or 2 / clevis	pull-type: pivoting clevis mounted: CAT 2 or 3 / clevis	
Cutting Width (inches)	96"	120"	
Cutting Height Range (inches)	2-12"		
Cutting Capacity (inches)	1.5"	2"	
Gearbox HP Rating	100 hp center, 75 hp spindle	120 hp center, 90 hp spindle	
Blade Tip Speed	15,200 fpm	16,700 fpm	
Deck Side Depth (inches)	10"		
Deck Thickness	10 ga. (135")		
Overall Width (inches)	100"	124"	
Overall Length (inches)	pull-type: 142" (25" tires) mounted: 96"	pull-type: 155" (25" tires) mounted: 110"	
Approximate Weight	pull-type: 1,467 lbs mounted: 1,213 lbs	pull-type: 1,847 lbs mounted: 1,576 lbs	
Blade Dimensions (inches)	.5" x 4"		
Wheel Selection	laminated, severe duty new ag, foam filled new ag, 15" rims		
Optional Dual Wheels - Pull-Type	no		
Quick-hitch Ready	yes		
Gearbox Warranty	6 years		

MULTI-SPINDLE ROTARY CUTTERS

RC

**TRACTOR PTO HP RANGE:
50 - 200 HP**

50-Series Offset Dual-spindles Models

DSO8.50 | 96-inch, semi-mounted

DSO10.50 | 120-inch, semi-mounted

Woods' rugged and powerful 50-Series offset models are ideal for orchards, tree-lined fields and any setting with overhangs.

- Cuts brush up to 3 inches in diameter.
- Variable wheel spacing.
- DSO8.50 Hydraulic variable offset 21 inches to the right or 5 inches left.
- DSO10.50 Hydraulic variable offset 27 inches to the right or 5 inches left.
- New, advanced gearbox seal technology, designed for harsh conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty – which includes the seals.

Hydraulic Variable Offset



RC MULTI-SPINDLE ROTARY CUTTERS



DSO8.50
Shown with
chain shielding

Woods' offset models reach far under canopies on either side of the tractor.



▶ VIDEO

SPECIFICATIONS	OFFSET, SEMI-MOUNTED	
MODEL	DSO8.50	DSO10.50
Minimum Tractor PTO HP	semi-mounted: 40 hp	semi-mounted: 50 hp
Hitch Category / Type	CAT 2 or 3 / clevis	
Hydraulic Variable Offset	21 inches to the right, 5 inches to the left	27 inches to the right, 5 inches to the left
Cutting Width (inches)	96"	120"
Cutting Height Range (inches)	2-12"	
Cutting Capacity (inches)	3"	
Gearbox HP Rating	205 hp center, 160 hp blade spindle	205 hp splitter; 160 hp blade spindle
Gearbox Warranty	6 years	
Blade Tip Speed	540 rpm / 14,886 fpm;	540 rpm / 15,974 fpm;
Deck Side Depth (inches)	13"	
Deck Thickness	10 ga. (.135")	
Overall Width	103"	127"
Overall Length	122"	128"
Approximate Weight	2,335 lbs	2,510 lbs
Blade Dimensions	.5" x 4"	
Wheel Selection	21" laminated	

MULTI-SPINDLE ROTARY CUTTERS

RC

Quick-Change Blade Pins

Easy to replace Quick-Change blade pins under the deck reduce down time.

Hydraulically Adjustable Tail Wheel

Hydraulic tail wheel offers a variable cutting range.

Tubular Front Frame

Greater strength and rigidity for towing.



MDS8.50
mounted
shown with chain shielding

**TRACTOR PTO HP RANGE:
40 - 200 HP**

50-Series Dual-spindles Models

DS8.50 | 96-inch, pull-type

MDS8.50 | 96-inch, 3-point mounted

DS10.50 | 120-inch, pull-type

MDS10.50 | 120-inch, 3-point mounted

- Cuts brush up to 3 inches in diameter.
- Variable wheel spacing.
- New, advanced gearbox seal technology, designed for harsh conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty – which includes the seals.

SPECIFICATIONS	MULTI-SPINDLE ROTARY CUTTERS	
	DS8.50 (PULL-TYPE) MDS8.50 (3-POINT MOUNTED)	DS10.50 (PULL-TYPE) MDS10.50 (3-POINT MOUNTED)
MODEL	DS8.50 (PULL-TYPE) MDS8.50 (3-POINT MOUNTED)	DS10.50 (PULL-TYPE) MDS10.50 (3-POINT MOUNTED)
Minimum Tractor PTO HP	40 hp pull-type 55 hp mounted	50 hp pull, semi-mounted 65 hp mounted
Hitch Category / Type	pull-type: pivoting clevis mounted: CAT 2 or 3 / clevis	
Cutting Width (inches)	96"	120"
Cutting Height Range (inches)	2-12"	
Cutting Capacity (inches)	3"	
Gearbox HP Rating	205 hp center, 160 hp spindle	205 hp splitter, 160 hp spindle
Blade Tip Speed	540 rpm / 14,886 fpm	540 rpm / 15,974 fpm, 1,000 rpm / 16,232 fpm (MDS only)
Deck Side Depth (inches)	13"	
Deck Thickness	10 ga. (135")	
Overall Width (inches)	103"	127"
Overall Length (inches)	pull-type: 150" (25" tires) mounted: 99"	pull-type: 162" mounted: 111"
Approximate Weight	pull-type: 2,238 lbs mounted: 2,069 lbs	pull-type: 2,537 lbs mounted: 2,373 lbs
Blade Dimensions (inches)	.5" x 4"	
Wheel Selection	laminated, severe duty new ag, foam filled new ag, 15" rims, used aircraft	
Optional Dual Wheels - Pull-Type	yes	
Quick-hitch Ready	yes	
Gearbox Warranty	6 years	



**FIELD RESEARCH
IS “THE SCIENCE OF
MARKETING” AND IT
GENERATES
INCREDIBLE
CUSTOMER-DRIVEN
INNOVATIONS**

Angela Larson Vice President, Marketing

No matter how much you scan the internet, watch videos, or talk with colleagues, you simply can't substitute the experience of visiting customers to talk to them face-to-face and watch them operate their equipment. Many of our new product ideas start or are validated by those customer visits. Since 2012, we've been practicing a disciplined research methodology called Voice of the Customer (VOC). In essence, VOC is “the science of marketing” and it has proven to generate incredible customer-driven innovations.



REAR DISCHARGE & TURF BATWING® FINISH MOWERS

Every rear-mount model in the Woods line-up offers the best features within our full line of finish mowers

- Designed for 15 – 75 horsepower tractors.
- High performance gearboxes require less maintenance.
- Floating lower hitch points allow the mower to follow uneven terrain.
- Industrial quality, reinforced blade spindle is designed for years of service.
- Available in a range of cutting widths from 4.5 to 7.5 feet.

Designed for Speed

Woods finish mowers help you maintain a beautiful lawn in less time. You'll look forward to using and maintaining your equipment with features that focus on your drive to get more done.

- Unique to the industry, our rounded front, tapered-side rear discharge deck allows you to mow with better maneuverability — reducing your trim time and increasing your productivity.
- Spring-loaded idler arms automatically maintain the correct tension on our strong custom-made belts, providing optimum run time.

Precision and Quality

For those who demand a professionally groomed lawn, Woods high-performance finish mowers ensure a clean, crisp, manicured appearance year after year.

- The combination of a deep deck, baffling and unique rear discharge design ensures exceptional material distribution and gives you the premium results that make the Woods name synonymous with “cut quality.”
- Manufactured exclusively to Woods' superior standards — heat-treated, alloy steel blades — provide maximum performance and precision cutting in applications such as large lawns, parks and sporting fields.
- Cast-iron belt sheaves with taper lock bushings and tapered roller bearings in the spindles offer exceptional strength and performance; standard on RD990X, PRD and TBW models.



TBW180
shown with standard
chain shielding

REAR DISCHARGE FINISH MOWERS

**TRACTOR PTO HP RANGE:
15 - 35 HP**

Models

RDC54 | 54-inch cutting width

RD60 | 60-inch cutting width

RD72 | 72-inch cutting width

- Hitch: Limited CAT 1 (RDC54) and CAT 1 (RD60 & RD72)



Deep Deck

4.6-inch deck depth, along with baffling and rear discharge design, ensure exceptional material distribution and a higher quality of cut.



Tubular Caster Arms

Tubular caster arms and heavy, tall deck rail supports (4.5 inches) increase strength and product life.

RDC54

Shown with optional chain shielding

Tapered Deck Design

Rounded front corners and tapered deck sides improve maneuverability and grass discharge while box-style construction offers superior deck strength.

SPECIFICATIONS			
MODEL	RDC54	RD60	RD72
Tractor PTO HP Range	15-25 hp	15-35 hp	20-35 hp
Hitch / Quick-hitch Compatible	Limited CAT 1 / no	CAT 1 / yes	
Cutting Width (inches)	54"	60"	72"
Weight (lbs)	401	503	603
Cutting Height Range (inches)	1-4.5"		
Overall Width (inches)	55"	61"	73"
Deck Material Thickness	10 gauge	8 gauge	
Side skirt (inches)	10 gauge x 4.6" deep	8 gauge x 4.6" deep	
Gearbox HP Rating	25 hp	35 hp	
Blade Tip Speed	16,200 fpm	18,030 fpm	18,000 fpm
Blade Overlap (inches)	1"	1.5"	
Blade Spindles / Bearings	3 cast iron housings / greasable ball bearings		
Tractor PTO Speed	540 rpm		
Driveline Size	CAT 3		
Belt	B-section Kevlar®		
Belt Adjustment	spring-loaded idler		
Cutting Area Shielding	chain shielding		
Mower Warranty	1 year residential or 90 days commercial		
Gearbox Warranty (limited)	3 year homeowners, 1 year commercial		

*** NOTE:** All RD-Series finish mower models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

REAR DISCHARGE FINISH MOWERS

FM

**TRACTOR PTO HP RANGE:
15 - 40 HP**

Models

PRD6000 | 60-inch cutting width

PRD8400 | 84-inch cutting width

PRD7200 | 72-inch cutting width


- Three-point hitch: CAT 1.
- Blade tip speeds: 18,100, 18,000 and 17,900 fpm.
- Ideal for mowing large lawns, sports fields, and parks.
- Features a strong, eight gauge steel deck and a powerful 60 hp gearbox.
- Kevlar® belt with clutching cover protects parts and increases lifespan.

- Anti-shimmy caster wheel springs reduce shock loads — tubular caster wheel arms add strength.
- Floating top link helps prevent scalping.
- Superior baffle design distributes material more evenly.



Offset Caster Arms

Caster arms can be adjusted inboard for more maneuverability and improved performance on rough ground (not available on PRD8400).

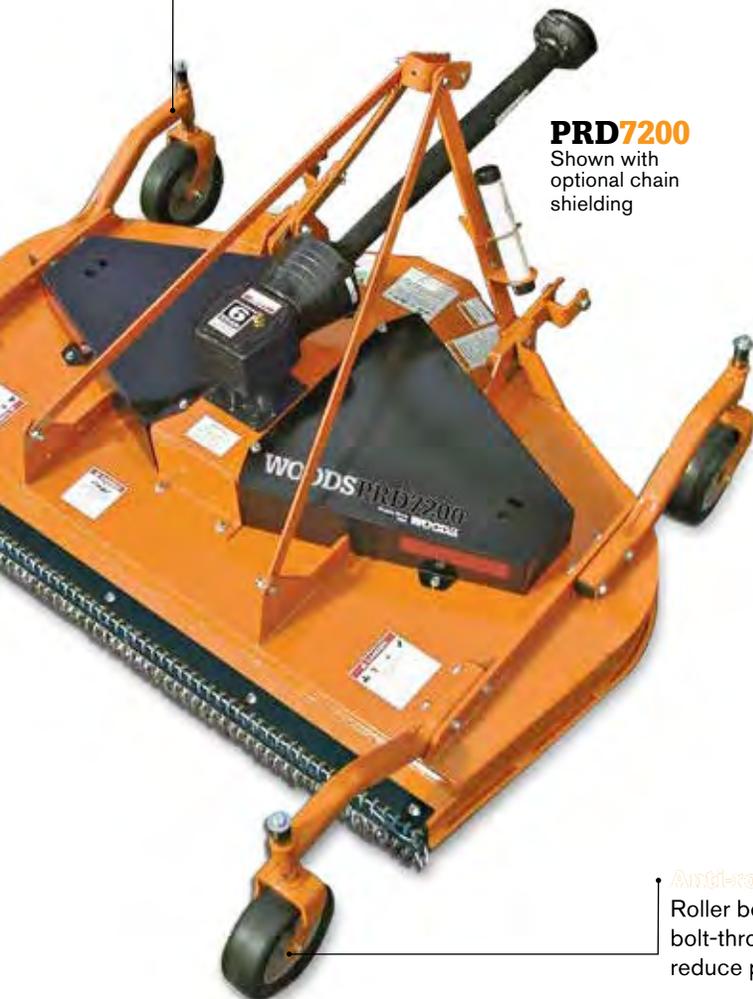

PRD7200
Shown with optional chain shielding

SPECIFICATIONS	REAR DISCHARGE MOWERS		
MODEL	PRD6000	PRD7200	PRD8400
Tractor PTO HP Range	15-40 hp	20-40 hp	25-40 hp
Hitch / Quick-Hitch Compatible	CAT 1 / yes		
Cutting Width (inches)	60"	72"	84"
Weight (lbs)	653	719	830
Cutting Height Range (inches)	1-5.5"		1-4.25"
Overall Width (inches)	62"	74"	86"
Deck Material Thickness	8 gauge		
Side Skirt (inches)	8 gauge x 5.375" with .563" diameter skid rod bumper		
Gearbox HP Rating	60 hp		
Blade Tip Speed	18,100 fpm	18,000 fpm	17,900 fpm
Blade Overlap (inches)	1.5"		2"
Blade Spindles / Bearings	3 cast iron housing / greasable, tapered roller bearing		
Tractor PTO Speed	540 rpm		
Driveline Size	CAT 3		
Belt	B-section Kevlar® with clutching cover		
Belt Adjustment	spring-loaded idler		
Cutting Area Shielding	chain shielding		
Mulching Kit	optional		
Mower Warranty	1 year		
Gearbox Warranty (limited)	6 years		
Spindle Warranty (limited)	3 years		

Anti-roll-off Casters

Roller bearing design and bolt-through solid rubber tires reduce possibility of roll-off.

FM REAR DISCHARGE FINISH MOWERS


Six-year Gearbox Warranty

With twice the oil capacity of many competitors and an improved breather system that maintains oil lubrication of gears, RD990X gearboxes carry a 6-year limited warranty to ensure years of worry-free performance.

Tapered Roller Bearings

Tapered roller bearings in caster wheels provide superior performance and longevity in rough conditions.

RD990X
shown with standard
chain shielding

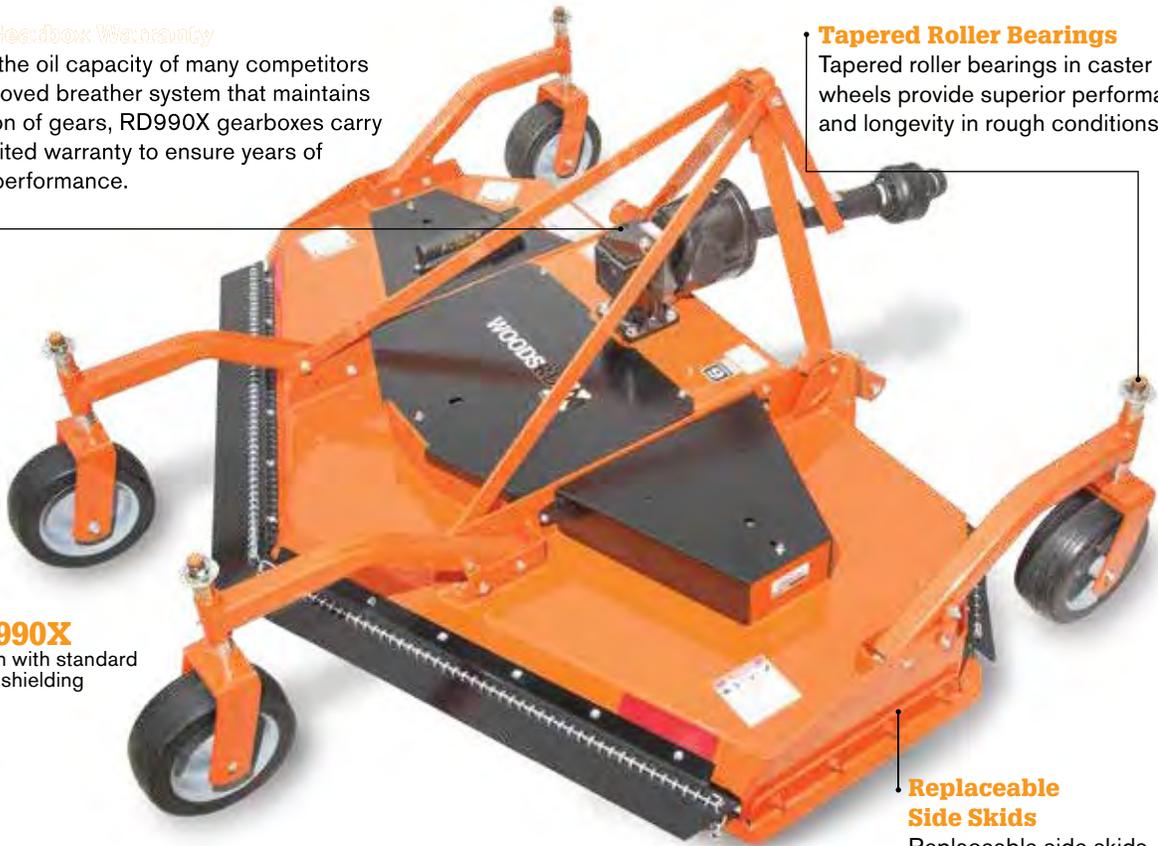

Replaceable Side Skids

Replaceable side skids attach to heavy side frames for durability and long life.

SPECIFICATIONS	
MODEL	RD990X
Tractor PTO HP Range	45-75 hp
Hitch / Quick Hitch Compatible	CAT 1 & 2 / yes
Cutting Width (inches)	90"
Weight	1,333 lbs
Cutting Height Range (inches)	1.5-7"
Overall Width (inches)	97"
Deck Material Thickness	7 gauge
Side Skirt (inches)	.31 x 8.5" with skid shoes
Gearbox HP Rating	75 hp
Blade Tip Speed	17,000 fpm
Blade Overlap (inches)	2"
Blade Spindles / Bearings	3 cast iron housings / greasable tapered roller bearings
Tractor PTO Speed	540 rpm
Driveline Size	CAT 4
Belt	Powerband w/double B-section
Belt Adjustment	spring-loaded idler
Cutting Area Shielding	chain shielding
Mulching Kit	-
Mower Warranty	1 year
Gearbox Warranty (limited)	6 years
Spindle Warranty (limited)	3 years

TRACTOR PTO HP RANGE: 45 - 75 HP

Model

RD990X | 90-inch cutting width

The Woods RD990X rear discharge finish mower is tough yet versatile enough to move from rough, weedy farmland to commercial lawns and landscapes.

- Three-point hitch: CAT 1 and 2.
- Blade tip speed: 17,000 fpm.
- Takes down grass and light weeds, and leaves a high grade finish cut behind.
- Features a Quick-Change blade system, an extra strong double B-section belt, and anti-wrap bars that prevent damage caused by material wrapped around lower spindle.
- Deep deck and stump jumper blade carrier with free-swinging blades ideal for rough grass.
- Floating lower hitch points allow the mower to follow uneven terrain.
- Chain shielding standard.



▶ VIDEO

Our flexible wing finish mowers deliver Woods' proven cutting deck in a three-gang configuration mounted to a heavy-duty trailer.

- Carrier bearing on the input driveline provides support, making it easier to attach to the tractor and allowing tighter turns (not available on TBW150C).
- Superior cutting capabilities are combined with contoured wing decks to let you quickly cut large, uneven areas of turf without sacrificing cut quality.
- Rounded front, tapered rear deck design allows mowing close to objects without damage.
- Round skid rod glides deck bottom over roots and uneven turf—adding strength to the deck skirt.
- Standard six-year gearbox limited warranty and three-year spindle warranty (not available on TBW150C).

TRACTOR PTO HP RANGE: MINIMUM 25 HP

Estate Model

TBW150C | 12.5-foot cutting width

This 12.5-foot mower provides a beautifully finished cut making short work of large lawns. Based on testimonials, the TBW150C could reduce two days of mowing into as little as four-and-a-half hours.

- Blade tip speed: 16,200 fpm.
- Three decks mounted to heavy-duty trailer from triple cut capacity; mow up to seven acres per hour at five miles per hour.



Floating Hitch

Floating hitch design flexes to allow the mower to follow the terrain with less stress and wear on the tractor drawbar. Adjustable to allow better fit on multiple tractor drawbar heights. Standard on the TBW144, TBW180 and TBW204.

TURF BATWING® FINISH MOWERS

**TRACTOR PTO HP RANGE:
30 - 80 HP**

Models

TBW144 | 12-foot cutting width

TBW180 | 15-foot cutting width

TBW204 | 17-foot cutting width

- Blade tip speeds: 18,000 fpm.
- Tapered roller bearings in wheels and blade spindles.
- Options include mulching kits on TBW180 and TBW204, highway light kit and anti-scalp roller kits on all three models.

Woods commercial Turf Batwing® finish mowers are designed for outstanding cut quality and built for a long, durable life.



TBW180
Shown with standard
chain shielding

TURF BATWING® FINISH MOWERS

FM



TBW180
shown with standard
chain shielding

SPECIFICATIONS				
MODEL	ESTATE MODEL	COMMERCIAL MODELS		
	TBW150C	TBW144	TBW180	TBW204
Tractor PTO HP Range	25-60 hp	30-80 hp	35-80 hp	40-80 hp
Input Driveline	CAT 3 (constant velocity)	CAT 4 (constant velocity)		
Wing Drivelines	CAT 3			
Cutting Width (feet)	12.5'	12'	15'	17'
Cutting Height Range (inches)	1-4.5"	1-5"	1-5"	1-5"
Wing Deck Cutting Width (inches)	54"	48.5"	60"	72"
Deck Overlap	6.15"	6.5"	6"	6"
Overall Width (inches)	151"	146"	182"	206"
Transport Width (inches)	93"	96"	100"	114"
Maximum Overall Length (inches)	135"	173"	183"	
Transport Length (inches)	126"	158"	161"	
Splitter Gearbox HP	100 hp			
Blade Tip Speed	16,200 fpm	18,000 fpm		
Drive Type	gearbox over v-belt			
Transport Tires	(2) 20" x 8"	(2) 20.5" x 8-10		
Caster Wheel Bearings	power metal bushing	tapered roller bearings		
Caster Wheels	(10) 4 x 10 solid	(10) 15 x 6-6 pneumatic	(10) 18 x 9.5-8 solid	
Deck Thickness	10 gauge steel plate	8 gauge		
Wing Deck Lift Cylinders	3" x 10" single acting	3.5" x 10" single acting		
Center Deck Lift Cylinders	3" x 8" single acting			
Trailer Frame Construction (inches)	.25" wall tubing			
Hitch Adjustment	floating clevis, multi-position			
Blade Spindles Bearings	greasable ball bearings	greasable tapered roller		
Blade Dimensions (inches)	(9) .25" x 2.5"	(9) .25" x 2.5"		
Blade Spindles	(9) cast iron	(9) cast iron		
Cutting Height Adjustment	spacer on caster			
Belts	B-section, Kevlar®			
Belt Adjustment	spring-loaded idler			
Chain Shielding	optional	standard		




Folds For Storage

With a folded transport width of only 93 inches the TBW150C can fit into a standard 8-foot garage door.

Transport Latching System

The transport latching system automatically engages when the decks are raised into transport position. Simply pull the release rope or engage the optional hydraulic latch release to lower the decks into the operating position with minimum effort.

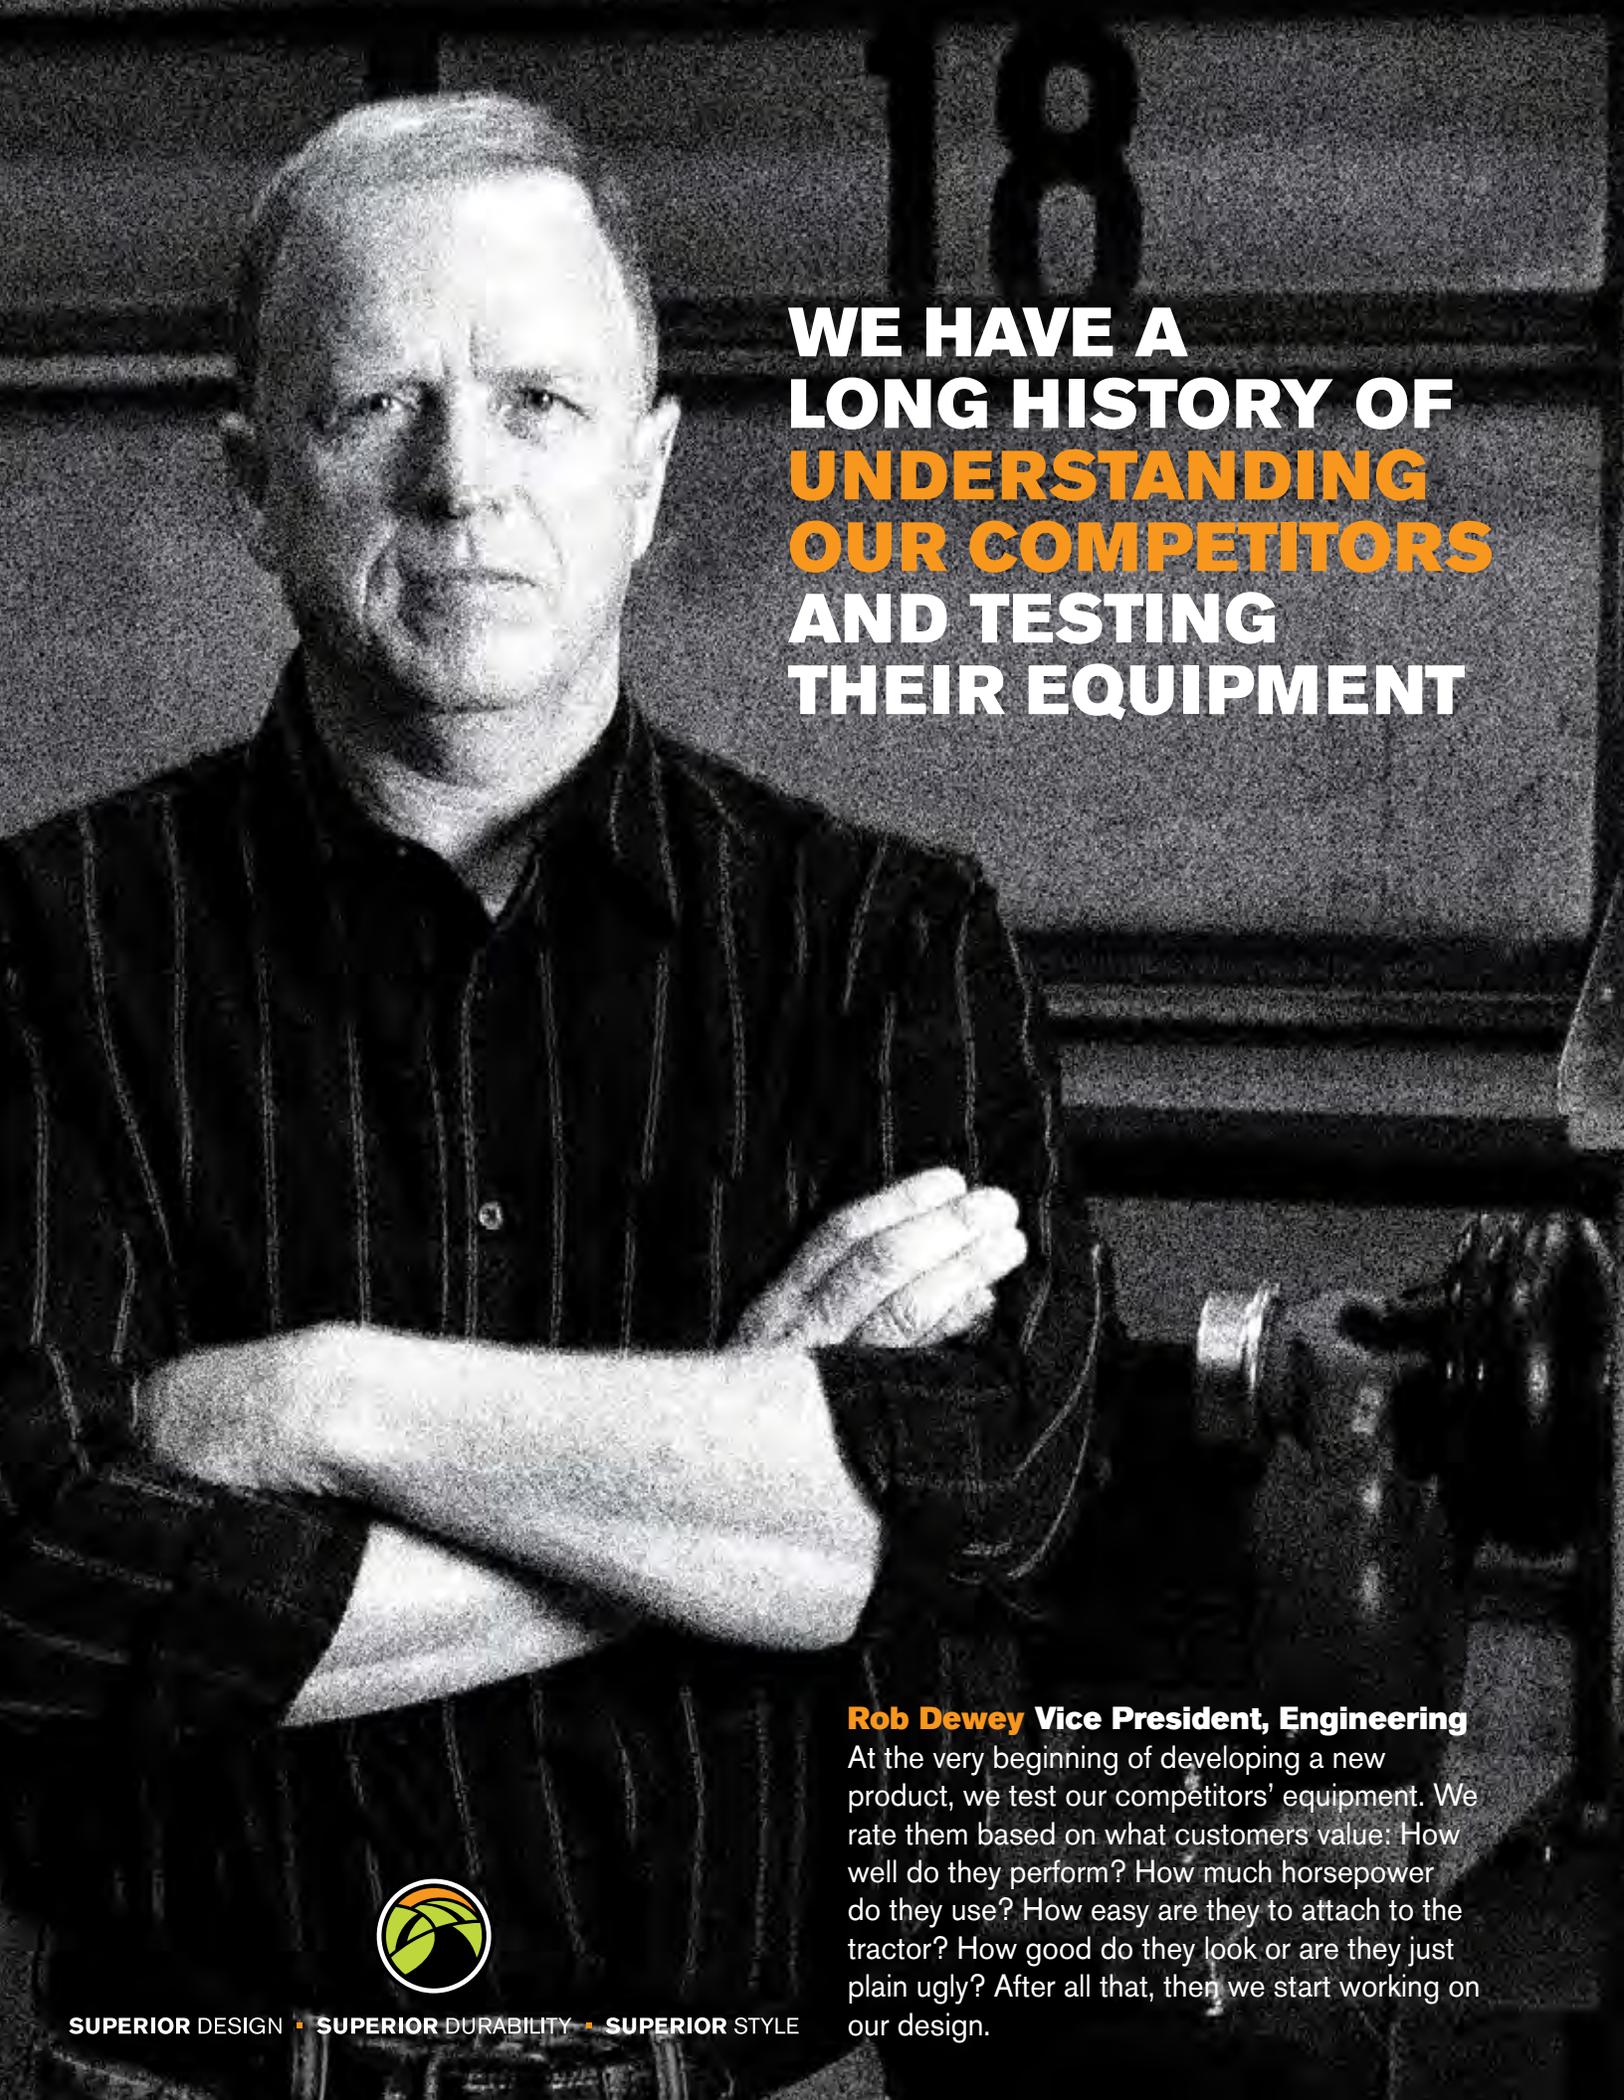A black and white photograph of a man with his arms crossed, standing in what appears to be a workshop or factory. The background shows industrial equipment and a large number '18' on a wall. The man is wearing a dark, short-sleeved button-down shirt.

**WE HAVE A
LONG HISTORY OF
UNDERSTANDING
OUR COMPETITORS
AND TESTING
THEIR EQUIPMENT**

Rob Dewey Vice President, Engineering

At the very beginning of developing a new product, we test our competitors' equipment. We rate them based on what customers value: How well do they perform? How much horsepower do they use? How easy are they to attach to the tractor? How good do they look or are they just plain ugly? After all that, then we start working on our design.



ZERO-TURN RADIUS MOWERS

FZ Front-Mount Series

Ideal for long periods of mowing when maximum productivity and comfort are important. Snow thrower, winter enclosure, and broom attachment deliver year-round versatility.

Models

FZ22-2 | 22 hp gas **FZ27** | 27 hp gas
FZ25D | 25 hp diesel

Options

- 15-cubic-foot grass collection system
- Mulching kit



▶ VIDEO

Woods Zero-Turn Radius Mowers

If you're looking for top-of-the-industry performance, you'll be glad you chose a Woods zero-turn mower. Woods was one of the early entries into the zero-turn market, offering ZT's for 30+ years. Our zero-turn mowers are built to full commercial standards and feature Woods' legendary quality, making them as tough as they come.

Woods FZ-Series front-mount mowers have cutting decks mounted in front of the tractor and operator. With a long wheelbase, they distribute weight more evenly, improving the comfort of your ride compared to other commercial mowers. And, your fatigue is greatly reduced with the full suspension seat—a standard feature. The long wheelbase also makes it easier for you to drive on long straights. Plus, with the deck out in front, your visibility is better and it is easy to trim around and cut under low growing trees and foliage.

Think of your Woods FZ-Series as more than a mower — think of it as a compact power unit that can help you do more than cut grass. Your investment in a front-mount zero turn gives you the option to add attachments such as a grass and leaf collection system, dozer blade, snow thrower, and broom. For those wintery chores, add an enclosure and your machine works year-round.





MX V-Baffle

MX V-Baffle creates strong suction, lifting grass for a precision cut and keeping dust under the deck.

Accessories

Sunshade

Stay cooler with this hard plastic shade.

Headlight Kit

Improve visibility when working at dusk or after dark.

Winter Enclosure

Stay warm while moving snow, includes manual wiper (headlights and power wiper optional).



TrueFloat Decks

Full float, side-discharge mowing decks; decks “float” both up and down and side-to-side to follow contour of ground for better cut; anti-scalp roller standard.

Extended Footrest

Ride with even greater comfort (will not work with winter enclosure, blade or broom).

Mulching Kit

Designed to leave behind finely shredded clippings of grass and leaves.

SPECIFICATIONS			
MODEL	FZ22-2	FZ27	FZ25D
Horsepower	22 gas	27 gas	25 diesel
Engine	Kawasaki V-Twin OHV	Kohler V-Twin OHV	Kubota 3-cylinder Liquid-cooled
Lubrication	Full pressure with spin-on filter		
Air Filter System	Dual-clean / pleated with foam pre-cleaner	Heavy-duty canister style – dual element	
Fuel Capacity	8.5 gallons		11 gallons
Speed (forward)	9 mph	10 mph	12 mph
Drive System	Hydro-gear transaxle, model ZT3400, spin-on automotive style oil filter	Twin hydrostatic pumps and separate wheel motors; spin-on automotive style oil filter – uses 20W50 weight oil	
Drive Tires (inches)	23" x 10.5" – 12 turf, or 23 x 10.5-12 Chevron		
Decks Available (inches)	MX – 54", 61"		
Deck Design	Fabricated 5" deep deck w/welded bumper, patented V-Baffle system, TrueFloat deck suspension, 3-bearing greasable spindles		
Cutting Height (inches)	1" – 5"		
Blade Tip Speed	16,500 fpm for 54"; 17,800 fpm for 61"	17,800 fpm for 54"; 18,400 fpm for 61"	
Deck Tilt / Height Adjust	Patented PowerTilt option on MX deck with power height adjustment		
Est. Weight with 61" Deck	1,508 lbs	1,704 lbs	1,751 lbs
Features	Fully adjustable suspension seat, cup holder, storage compartment, hour meter, flexible ShrubSaver, discharge chute, tilt seat (FZ22-2 only)		
Options Available	Mulching kits, blower-driven grass collection system and snow thrower 50", dozer blade 60", sweeper 60", cab (excludes FZ22-2), headlights, tire chains		
Warranty (limited)	2 years / 2,000 hours		

View all available accessories and attachments at woodsequipment.com or visit your local Woods Dealer.

Attachments



Brooms, 60-inch

FSW6000F Fixed-angle model; angles 30 degrees to the right.

FSW6000T Adjustable-angle model; angles 25 degrees to left or right; includes electrical lift.



Snow Thrower

Single stage 50-inch swath; manual discharge chute turns 180 degrees; adjust angle from seat (no cab for FZ22-2).



Dozer Blade, 60-inch

With 25 degree angle, right or left.

PowerTilt Deck

Powered tilt allows deck to be raised for cleaning and maintenance. Includes powered deck height adjustment. Controls are conveniently located on tractor console.



Tire Options

Turf Tread Tires

Turf tread tires with low ground pressure provide traction to protect your lawn.


Chevron Tread Tires

Chevron tread pattern offers high traction on slopes and rough terrain.



CENTER DRIVE FLAIL SHREDDER

**TRACTOR PTO HP RANGE:
MINIMUM 90 - 240 HP**



**Tri-lateral Hood
Allows Quadruple
Shredding Action**

The first cut occurs at the cutting level, the second at the front panel, the third at the top of the shredder, and the fourth cut occurs at the back of the shredder.

Standard L Knife

Heat-treated, 6mm reversible for long life.


HD-Cotton L Knife

Heat-treated, Duraface®, 8mm reversible for longer life and durability in severe conditions.



Cupped Knives

Create vacuum action to lift foliage off the ground and up into the shredder; can be used in combination with L knives.

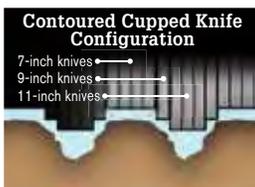

Contour Cupped Knives

Three different length cup knives; great for defoliating potato vines or other root crops grown on ridges.

Center Drive Models

S15CD | Cutting width: 183 inches

S22CD | Cutting width: 271 inches

S27CD | Cutting width: 327 inches

S20CD | Cutting width: 247 inches

S25CD | Cutting width: 303 inches

S30CD | Cutting width: 363 inches

- High capacity gearbox with large oil volume reduces heat buildup, extending bearing and gear life.
- Specially designed oil seal protectors prevent vines from encasing and damaging gearbox oil seals.
- 12.75-inch diameter flail tubes with spiral mounted knives feature increased rigidity, resulting in smoother operation.

SPECIFICATIONS	CENTER DRIVE FLAIL SHREDDERS					
	S15CD	S20CD	S22CD	S25CD	S27CD	S30CD
Minimum Tractor PTO HP	90 hp	120 hp	132 hp	150 hp	162 hp	240 hp
Tractor PTO	1,000 rpm					
Cutting Height (inches)	2"-14"					
Cutting Width (inches)	183"	247"	271"	303"	327"	363"
Overall Width (inches)	190"	254"	278"	310"	334"	380"
Approximate Weight (lbs)	4,248	5,038	5,308	5,838	6,138	6,958
Number of L Knives	168	232	256	288	312	352
Lift HP Required	90	120	135	150	165	190
Pull HP Required	90	120	135	150	165	N / A
Gearbox HP Rating	300 hp					
Gearbox Warranty (limited)	5 year					
Driveline 2 Point & 3 Point	CAT 6					
Pull-type	CAT 6 CV					
Hood Type	smooth, trilateral shape					
Hood Thickness (inches)	.18" (optional wearliner available)					
End Plate Thickness (inches)	.25"					
Flail Tube Diameter (inches)	12.75"					
Flail Tube End Bearing (inches)	2.18" (2-3/16")					
Shielding	rubber belting or steel flaps					
Wheel Size (inches)	9.5L" x 15"					
Knife Retention	bolt-on (no D-rings)					
Knife Pattern	spiral					
Knife Types	double-edged L (6mm), double-edged HD-cotton Duraface® (8mm) L; cup or contour cup					
Wheel Arm Types	rigid strut or caster					caster
Optional Friction Clutch	24,000 lbs inch rating					n/a
Automatic Clutch	30,000 lbs inch rating (1.75" 20 PTO only)					standard
Optional Hitches	2-point, 3-point (quick-hitch compatible) pull					3-point mounted



▶ VIDEO

Discharge Chute

Superior discharge chute design resists plugging.

Augers

Augers with optimized feed paddles and excellent feeding ability.

SB84

SNOW BLOWERS

- Tractor HP range: 15–175 hp
- Available in six working widths from 54 to 108 inches
- Two-stage design gives you more throwing force with less horsepower

TRACTOR PTO HP RANGE: 15 - 60 HP

Models

SB54S | Tractor PTO HP range: 15–25 hp

SB64S | Tractor PTO HP range: 15–35 hp

SB74C | Tractor PTO HP range: 30–50 hp

SB84C | Tractor PTO HP range: 35–60 hp

- Designed specifically for subcompact and compact tractors.
- Move large amounts of snow in a short time with working widths from 54 to 84 inches.
- Get more throwing force with less horsepower than single-stage snow blowers with Woods' two-stage design.
- Reinforced steel side plates offer exceptional durability.
- Make quick and easy adjustments using the optional hydraulic or electric chute rotator.

4-Blade Fan

More efficient 4-blade fan design moves snow faster.



TRACTOR PTO HP RANGE: 60 - 175 HP

Models

SS84-2 | Tractor PTO HP range: 60–80 hp

SS96-2 | Tractor PTO HP range: 80–150 hp

SS108-2 | Tractor PTO HP range: 125–175 hp

- These heavy-duty snow blowers have plenty of room to tackle the big storms with working widths from 84 to 108 inches, and up to a 38-inch working height.
- Adjustments are a breeze with the 200-degree hydraulic chute rotation — standard on every SS model.
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch compatibility.
- Double your snow throwing power with two feeder augers on the SS96-2 and SS108-2 models.

SPECIFICATIONS								SNOW BLOWERS							
MODEL	SB54S	SB64S	SB74C	SB84C	SS84-2	SS96-2	SS108-2	SB54S	SB64S	SB74C	SB84C	SS84-2	SS96-2	SS108-2	
Tractor PTO Horsepower	15-25 hp	15-35 hp	30-50 hp	35-60 hp	60-80 hp	80-150 hp	125-175 hp	15-25 hp	15-35 hp	30-50 hp	35-60 hp	60-80 hp	80-150 hp	125-175 hp	
Tractor PTO Speed	540 rpm						540 / 1,000 rpm		540 rpm						
Tractor Hitch	CAT 1			CAT 1 & 2			CAT 2 & 3			CAT 2 & 3					
Working Width (inches)	54"	64"	74"	84"	84"	96"	108"	54"	64"	74"	84"	84"	96"	108"	
Transport Width (inches)	56"	66"	76"	86"	88"	100"	112"	56"	66"	76"	86"	88"	100"	112"	
Working Height (inches)	24"			26"			38"			38"					
Approximate Weight (lbs)	415	436	592	632	1,210	1,420	1,741	415	436	592	632	1,210	1,420	1,741	
Driveline	CAT 3						CAT 4		CAT 3						
Driveline Protection	shear bolt						shear bolt / clutch		shear bolt						
Drive Type - Fan	gearbox						gearbox		gearbox						
Drive Type - Auger	gearbox & chain						gearbox & chain		gearbox & chain						
Number of Feeder Augers	1						1, 2 optional		1						
Auger Flighting (inches)	.31" x 2"						.31" x 3"		.31" x 2"						
Chute Rotation	270°						200°, hydraulic		270°						
Hydraulic Chute Rotator	optional						standard		optional						
Fan Diameter (inches)	22"			24"			33"			22"					
Fan Depth (inches)	6"			8"			9"			6"					
Adjustable and Replaceable Skids	yes						yes		yes						
Bolt-on Cutting Edge	no						yes		no						
Telescoping 3-point Hitch	no						yes		no						



**TO INNOVATE,
IT HELPS TO
STEP BACK AND
WALK AWAY FROM
THE PROBLEM
WE'RE TRYING
TO SOLVE**

Cory Sarver Engineering Manager

When we were working on the idea for interchangeable tools on our seeders, we had to get outside of “project management mode” and visit customers to focus on how seeders and planters were being used in the field and who was using them. To innovate, it helps to step back and walk away from the problem we’re trying to solve.



SUPERIOR DESIGN ■ **SUPERIOR DURABILITY** ■ **SUPERIOR STYLE**

LANDSCAPE EQUIPMENT

Whether your landscape projects are contained in your own backyard or the way you make your living, you want equipment that's easy to use, easy to maintain, and built to last. That's what Woods delivers.

We build a full line of tools to tackle a variety of projects, such as putting in a new garden, reshaping a driveway, or cleaning up. We'll help you get the most out of the investment you've made in your tractor. And, at the end of the day, we'll help you feel good about all the chores you checked off your list.

Pull it all together and you've got Woods Power — power to be more productive.

Box Scrapers: Our Woods® and Gannon® brands, are designed with exceptional strength and versatility to move large amounts of material.

Grading Scrapers: Ideal for leveling dirt and gravel in driveways, lawns and fields.

Rear Blades: Move dirt, grade driveways, and clear snow.

Landscape Rakes: Great for clean-up jobs and fine raking.

Post Hole Diggers: Power through a variety of soil conditions and projects, like planting trees and shrubs or installing deck or fence posts.

Quick Hitch

Woods TQH1 quick hitch makes easy work of changing from one 3-point attachment to another. When hooking up to many implements, you never have to leave the tractor because lower hooks automatically lock implement into place.

- Heavy-duty steel construction with adjustable top link bracket.
- Seven-eighths-inch mounting pins and adapter bushings.
- Lower arms lock automatically.
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch compatibility.



TQH1



SPECIFICATIONS	TQH1	TQH2
Tractor Hitch	CAT 1	CAT 2
Width (inches)	27.25"	27.25"
Approximate Weight (lbs)	75 lbs	75 lbs
Mounting Pin Diameter (inches)	.875"	.875"
Adapter Bushing Diameter (inches)	1.125"	1.125"



WOODS

**TRACTOR HP RANGE:
UP TO 45 HP**

GBC48 | 48-inch **BSS54** | 54-inch
BSS60 | 60-inch **BSS65** | 65-inch
BSS72 | 72-inch

- Hardened scarifier teeth with replaceable tips.
- High-carbon reversible/replaceable cutting edges leaves a level finish.



**GBC48 / BSS54 / BSS60 /
BSS65 / BSS72**

SPECIFICATIONS		WOODS BOX SCRAPERS					
MODEL	GBC48	BSS54	BSS60	BSS65	BSS72	BSM72	BSM84
Tractor Engine HP Range	up to 25 hp	up to 45 hp				40-65 hp	
Tractor Hitch	CAT 0, ltd 1 & 1	CAT 1				CAT 1 & 2	
Working Width (inches)	48"	54"	60"	65"	72"	72"	84"
Capacity (cubic feet)	6.8	10.3	11.5	12.5	13.8	13.8	16.2
Approximate Weight (lbs)	285	486	514	528	551	680	750
Scarifier Depth (inches)	0-1.5"	0", 1.5" or 3" adjustable					
Number of Scarifiers	4	4	5	5	6	6	7
Tailgate Type	fixed				fixed, floating optional		
Cutting Edges					2		



**TRACTOR HP RANGE:
40 - 65 HP**

BSM72 | 72-inch **BSM84** | 84-inch

- Offers optional floating, hinged tailgate to provide maximum down force on cutting edge.
- End plates: .5-inch – 33% heavier end plates than our BSS models.
- One-quarter-inch plate welded inside of end plates to increase life.

SPECIFICATIONS		GANNON INDUSTRIAL 4X4 BOX SCRAPERS									
MODEL	REPLACEABLE WEAR PLATE						SOLID END PLATE				
	72HSD	76HSD	80HSD	84HSD	88HSD	92HSD	80HXD	84HXD	88HXD	92HXD	96HXD
Tractor Engine HP Requirement	40-90 hp						40-100 hp				
Tractor Hitch Class							CAT 2				
Working Width (inches)	72"	76"	80"	84"	88"	92"	80"	84"	88"	92"	96"
Height (inches)							24.5"				
Operating Weight (lbs)	1,230	1,247	1,263	1,280	1,297	1,310	1,236	1,280	1,297	1,310	1,327
Depth (inches)							40.19"				
Heaped Capacity (cubic feet)	25.7	27.0	28.6	30.0	31.6	32.9	28.6	30.0	31.6	32.9	34.3
End Plate Thickness (inches)							.5"				
Replacement End Plate Wear Bits	yes						no				
Number of Cutting Edges							2				
Cutting Edge Size (inches)							.5" x 6"				
Number of Shanks							8				
Tailgate Type	fixed						fixed				

WOODS AND GANNON BOX SCRAPERS

Tackle the toughest spreading and grading jobs with Woods® and Gannon® brand box scrapers. From the reinforced steel A-frame to the tough, reversible cutting edge and replaceable scarifiers, our box scrapers deliver exceptional durability and versatility.

- Easily carve into sod and dirt with full-length, high-strength, double beveled cutting edges.
- Widths from 48 to 96 inches to match a variety of jobs.
- Tackle the most rugged jobs with high-strength moldboards.
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch compatibility.



**TRACTOR HP RANGE:
40 - 80 HP**

Take advantage of the Gannon name recognized throughout the construction industry as having superior durability, quality and strength.

Gannon® Industrial 4 x 2 and 4 x 4 Models

- Ideal for landscapers, farmers, contractors, and municipalities.
- Scarify, level, grade and backfill.
- Ensure fast, easy and safe hook-ups with ASABE quick-hitch compatibility.
- Large capacity box—no gussets or bars to obstruct material boiling.
- Unique maxi-load shape moldboard minimizes tractor drag.
- Replaceable, heat-treated scarifier teeth and replaceable side-wear plates available (on some models).
- Reversible/replaceable high-carbon cutting edges.



SPECIFICATIONS

MODEL	65LB	65HB	72LB	72HB	76LB	76HB	80LB	80HB	84HB
Tractor Engine HP Range	40-80 hp								
Tractor Hitch Class	CAT 1 & 2								
Working Width (inches)	65"		72"		76"		80"		84"
Height (inches)	19.31"	24.5"	19.31"	24.5"	19.31"	24.5"	19.31"	24.5"	
Operating Weight (lbs)	925	1,020	1,002	1,100	1,040	1,140	1,075	1,170	1,200
Depth (inches)	39.5"								
Heaped Capacity (cubic feet)	20.8	23.2	23.0	25.7	24.3	27.3	25.7	28.6	30.0
End Plate Thickness (inches)	.5"								
Replacement End Plate Wear Bits	no								
Number of Cutting Edges	2								
Cutting Edge Size (inches)	.5" x 6"								
Number of Shanks	6			8					
Tailgate	yes								

GRADING SCRAPERS

Woods grading scrapers are ideal for leveling, whether you're filling potholes in gravel driveways or removing a soil berm after installing field tile.

- Heavy-duty mast plate creates more down force for smoother surface and virtually eliminates washboard effect.
- Adjustable skid shoes and scarifiers increase performance.
- Tall side frames hold more material for leveling.
- Approachable leading edges and structural reinforcements keep scraper stronger for longer.
- Reversible/replaceable high-carbon cutting edges.



GSS72P

TRACTOR HP RANGE:
15 - 45 HP

Models

GSS54/GSS54P | 53-inch

GSS60/GSS60P | 59-inch

GSS72/GSS72P | 71-inch

- Three-point hitch: Limited CAT 1 and 1.
- Fourteen- and sixteen-inch box heights.



All models available without scarifiers when deep tillage is unnecessary. Grading scrapers without scarifiers have no shank pockets.

TRACTOR HP RANGE: 30 - 65 HP

Models

GSM84/GSM84P | 83-inch

GSM96/GSM96P | 95-inch

- Three-point hitch: CAT 1 and 2.
- Sixteen-inch box height — one of the tallest in the industry.



GSM96P

SPECIFICATIONS	GRADING SCRAPERS				
	GSS54 / GSS54P	GSS60 / GSS60P	GSS72 / GSS72P	GSM84 / GSM84P	GSM96 / GSM96P
Tractor Engine HP Range	15-30 hp	20-45 hp		30-65 hp	
Hitch Category	Limited CAT 1 & CAT 1	CAT 1		CAT 1 & CAT 2	
Working Width (inches)	53"	59"	71"	83"	95"
Overall Width (inches)	58"	64"	76"	88"	100"
Overall Length (inches)	42"			46"	
Box Height (inches)	14"			16"	
Weight without Scarifiers (lbs)	349	493	580	664	712
Weight with Scarifiers (lbs)*	409	553	655	754	802
Number of Scarifiers*	4		5	6	
Scarifier Adjustments*	-4.0, -2.5, -1.0, +1.0		-2.5, -1.0, +0.5, +2.5		
Reversible Cutting Edge (inches)				0.5" x 6"	
Skid Shoe Adjustment	-0.75 to +0.75		-1.0 to +0.5		
Lower Hitch Design	clevis				

* Premium models only: GSS54P, GSS60P, GSS72P, GSM84P, GSM96P

TRACTOR HP RANGE: UP TO 45 HP

Models

RBS54 | 53-inch **RBS60P** | 59-inch
RBS60 | 59-inch **RBS72P** | 71-inch
RBS72 | 71-inch **RBS84P** | 83-inch

- Formed moldboard made from high-strength steel provides exceptional rigidity and pivots 360°.
- Reversible, bolt-on cutting edge adds to product life and enables easy replacement.
- Tilt and offset functions for advanced grading applications (premium models).
- Fast, easy, and safe hook-ups with ASABE Quick Hitch compatibility.
- Optional skid shoes for depth control, optional parking stand for easier attachment, and optional end plates (premium models) for moving more material.



RBS72
Rear Blade

Ideal for grading dirt or gravel, cleaning up construction sites and moving snow.

SPECIFICATIONS

MODEL	RBS54	RBS60	RBS72	RBS60P	RBS72P	RBS84P
Tractor Engine HP	up to 30 hp			20-45 hp		
Tractor Hitch	Limited CAT 1 & 1			CAT 1		
Working Width	53"	59"	71"	59"	71"	83"
Moldboard Height	12"			15"		
Moldboard Thickness	0.182" (grade 80 steel)			0.250" (grade 80 steel)		
Weight	134 lbs	142 lbs	156 lbs	268 lbs	288 lbs	308 lbs
Double-beveled, Reversible Cutting Edge Dimensions	0.375" x 6"			0.5" x 6"		
Angle Adjustments	5 positions up to 30°					
Offset Adjustments	–	–	–	up to 12" left or right		
Tilt Adjustments	–	–	–	up to 15°		
End Plates	–	–	–	optional		
Skid Shoes	optional					
Tailwheel	–	–	–	–	–	–
Parking Stand	optional					
ASABE Quick-hitch Compatible	yes					



RB72.50

TRACTOR HP RANGE: 30 - 65 HP

Models

RB72.50 | 71-inch
RB84.5 | 83-inch
RB96.50 | 95-inch

- Seventeen-inch high, 1/4-inch thick moldboard.
- Double-beveled, reversible, and hardened cutting edge for long life.
- Fully manual offers angle, offset, and tilt adjustments.
- Optional end plates, skid shoes, and hydraulic angle kit (includes relief valve).
- Convenient parking stand is standard.

TRACTOR HP RANGE: 40 - 85 HP

Models

RB84.60 | 83-inch
RB96.60 | 95-inch

- Seventeen and 1/2 inch high, 5/16-inch thick moldboard.
- Double-beveled, reversible, and hardened cutting edge for long life.
- Choose manual or hydraulic, featuring angle, offset, and tilt adjustments.
- Optional end plates, skid shoes, tailwheel, and selector valve.
- Convenient parking stand is standard.

TRACTOR HP RANGE: 50 - 150 HP

Models

RB750 | 83-inch
RB850 | 95-inch
RB990 | 107-inch
RB1010 | 119-inch

- Three-point hitch: CAT 2 and 3.
- Available as fully hydraulic, fully manual or combination cylinder options.
- Fully hydraulic models allow precise blade and material control (angle, tilt, and offset).
- Tough, dozer-type full box construction.

SPECIFICATIONS									
MODEL	RB72.50	RB84.50	RB96.50	RB84.60	RB96.60	RB750	RB850	RB990	RB1010
Tractor Engine HP	30-65 hp			40-85 hp		50-100 hp		80-150 hp	
Tractor Hitch	CAT 1 & 2			CAT 1 & 2		CAT 2		CAT 2 & 3	
Working Width	71"	83"	95"	83"	95"	83"	95"	107"	119"
Moldboard Height	17"			17.5"		17"		18"	
Moldboard Thickness	0.25" (grade 80 steel)			0.313" (grade 80 steel)		0.313"		0.25"	
Weight	455 lbs	475 lbs	495 lbs	705 lbs	730 lbs	1,193 lbs	1,233 lbs	1,483 lbs	1,535 lbs
Double-beveled, Reversible Cutting Edge Dimensions	0.5" x 6"								
Angle Adjustments	7 positions up to 45° (mech or hyd)			up to 45° (mech or hyd)		9 forward up to 60°; 5 reverse up to 30° (mech or hyd)		up to 60° (hyd)	
Offset Adjustments	6", 12", 18" left or right			up to 20" (mech or hyd)		up to 24" (mech or hyd)		up to 33" (mech or hyd)	
Tilt Adjustments	5 positions up to 23°			up to 23° (mech or hyd)		up to 30° (mech or hyd)		up to 28° (mech or hyd)	
End Plates				optional				-	
Skid Shoes				optional				-	
Tailwheel	-					optional			
Parking Stand						standard			
ASABE Quick-hitch Compatible						yes			



Woods landscape rakes are built with rugged durability for tough clean-up jobs, as well as fine raking features for light-duty lawn care and general maintenance.

TRACTOR HP RANGE: UP TO 45 HP

Models

LRS52 52-inch	LRS72P 72-inch
LRS60 60-inch	LRS84P 84-inch
LRS72 72-inch	LRS96P 96-inch

- Heavy pivot components increase product longevity.
- Large, structural tine beam channel holds alloy spring steel tines firmly.
- Fast, easy and safe hook-ups with ASABE quick-hitch compatibility.
- Optional gauge wheels allow better depth control and optional parking stand for easier attachment.



SPECIFICATIONS	LANDSCAPE RAKES					
	LRS52	LRS60	LRS72	LRS72P	LRS84P	LRS96P
Tractor Engine HP Range	up to 30 hp			20-45 hp		
Tractor Hitch	Limited CAT 1 & CAT 1			CAT 1		
Working Width (inches)	52"	60"	72"	72"	84"	96"
Approximate Weight (lbs)	156	168	186	264	288	311
Pivot Angle	forward - 5 @ 15°, reverse - 5 @ 15°					
Tines Dimensions(inches)	5/16" x 1"					
Tines Spacing(inches)	1"					
Gauge Wheels	optional					
ASABE Quick-hitch Compatible	yes					
Parking Stand	optional					



Four sizes in three duty classes

TPD95

TRACTOR PTO HP RANGE: 14 - 95 HP

Models

TPD25 | Tractor PTO HP range: 14 – 25 hp

TPD35 | Tractor PTO HP range: 20 – 35 hp

- Three-point hitch: CAT 0, Ltd 1 and 1.
- Auger bits available in 6-, 9-, and 12-inch by 36-inch sizes.

Model

TPD65 | Tractor PTO HP range: 25 – 65 hp

- Three-point hitch: CAT 1 and 2.
- Auger bits available in nine different sizes.

Model

TPD95 | Tractor PTO HP range: 35 – 95 hp

- Three-point hitch: CAT 1 and 2.
- Auger bits available in six different sizes.



Ideal for landscapers, farmers, and municipalities planting trees and shrubs or installing decks and fencing in all soil types and conditions.

SPECIFICATIONS	POST HOLE DIGGERS			
	TPD25	TPD35	TPD65	TPD95
Tractor PTO HP Range	14-25 hp	20-35 hp	25-65 hp	35-95 hp
Tractor Hitch	CAT 0, Ltd 1, & 1	CAT 1	CAT 1 & 2	
Approximate Weight (without auger)	140 lbs	146 lbs	194 lbs	238 lbs
Drive Type	gearbox			
Tractor PTO Speed	540 rpm			
Shear Pin	standard			
Positioning Handle	standard			
Hydraulic Downforce Kit	optional			
Parking Stand	optional			
Auger (Diameter x Length)	6", 9", 12" x 36"	6", 9", 12", 18" x 48"	6", 9", 12", 18", 24", 30" x 48"	
Auger Extension	optional (12")			

- Heavy-duty welded construction and shear pin increase product longevity.
- Rugged gearbox with tapered roller bearings withstands shock load to handle the toughest projects.
- Wide range of auger bits ensures the best tool for any application.
- Positioning handle standard for easy operating.
- Optional hydraulic downforce kit and parking stand.
- Six-year gearbox warranty.

WOOD & BRUSH EQUIPMENT

At Woods, performance starts with research and design. Like a kinetic log splitter designed after months of feedback from professionals – so popular with our testers that they wouldn't give it back.

We think you'll feel the same about your Woods equipment ... for years and years.

3-POINT LOG SPLITTER

Model

HLS3

- Fits CAT 1 and CAT 2 tractors.
- Attaches inline to tractor, offering a large operator work area.
- Beam manufactured in the USA from high-strength US steel, reinforced in high-stress areas.
- Log Cradle patented design is integrated with foot plate for added strength and durability.
- Precision-engineered 8" wedge cleanly splits even the most difficult wood, such as wet, stringy elm.
- Operates in horizontal or vertical position.

SPECIFICATIONS	
MODEL	HLS3
Hitch Type	3-point
Hitch Category	CAT 1 & 2
Cylinder	4" dia. x 24" stroke
Valve	auto-return
Maximum Splitting Force**	20 tons
Operation	horizontal and vertical
Log Capacity	24.5" length (61 cm)
Cycle Time**	13 seconds
Dimensions	working height 25" (63.5 cm); length 82.5"; width 48.2"

** Tonnage and cycle times may vary depending upon mechanical and environmental conditions.



The Woods 3-point log splitter fits CAT 1 and CAT 2 tractors, and is easy to move without the hassle of trailering.



Accessories

Work more easily and efficiently with our exclusive Log Catcher and 4-Way Wedge attachments, sold separately.



Log Catcher



4-Way Wedge

KINETIC LOG SPLITTER

Kinetic energy is released in a burst that drives the log forward into a 6-inch hardened wedge, splitting the wood in 2 or 3 seconds – 6x faster than hydraulic splitters. This tremendous increase in splitting speed significantly increases productivity, even on large, tough, gnarled wood. Our innovative features were developed and tested with professional firewood producers, resulting in a superior, commercial-grade splitter.

Model

KLS

- 2- to 3-second cycle time.
- No hydraulic fluid or parts – easy to maintain.
- Precision, heat-treated steel alloy rack and pinion gear system made in the USA.
- Uses less fuel than hydraulic splitters, which saves money.
- Two-handed operation from either side.
- Patent-pending handle design, with torsion springs virtually eliminates kickback – work for hours without tiring.
- Retractable tongue and welded-on table hands make it easy to move.



KLS



VIDEO

The Woods PTO-powered stump grinder is built to perform.



**TRACTOR PTO HP RANGE:
15 - 50 HP**

Model

TSG50 | 20-inch cutting wheel

- Grind stumps 16 inches above and below.
- Twenty-four tough, carbide steel teeth cut bi-directionally for increased productivity.
- Hinged debris shield allows easier grinding below ground level.



VIDEO



SPECIFICATIONS	STUMP GRINDERS
MODEL	TSG50
Tractor PTO HP Range	15-50 hp
Tractor Hitch	CAT 1 & 2
Cutting Wheel Diameter(inches)	20"
Cutting Wheel Speed	1,037 rpm
Cutter Tip Speed	5,428 fpm
Hub Torque (lbs / ft)	76-250
Approximate Weight (lbs)	545
Max Stump Height (inches)	16"
Max Cutting Depth (inches)	16"

**A CREATIVE MINDSET
REQUIRES PUTTING
YOURSELF IN THE
CUSTOMER'S SHOES,
AND GETTING
YOUR HANDS ON
THE PRODUCT**

Mark McLane Engineering Manager
and Inventor of Woods' Driveline
Lift Assist

Developing the driveline lift assist was actually based on customer requests – to make it easier to hook up to a tractor. At the time I thought, how hard could it actually be? But, then I took a hands-on approach and tried to hook up a rotary cutter. That made all the difference. A creative mindset requires putting yourself in the customer's shoes and getting your hands on the product.



SUPERIOR DESIGN • SUPERIOR DURABILITY • SUPERIOR STYLE

TILLAGE EQUIPMENT

When you're ready to dig in and work the soil, turn to Woods. We bring a well-earned reputation for durability, reliability and innovation to our line of tillage equipment. Woods rotary tillers and disc harrows are designed for a wide range of projects on homes, small farms, orchards or nurseries, and for anyone living the country life. Choose from a large selection of widths, depending upon your tasks.



Since 1946, Woods has been making equipment that helps you get your job done right. Because having the right tool for the job makes work seem... well, less like work. For everyone who loves to work in the dirt, we offer versatile, easy to use disc harrows and rotary tillers in a range of sizes and abilities to fit your job.

What's your soil type? Are you cutting into an established lawn or simply turning over the ground after harvest? Woods tillage equipment has innovative design features that make them easy to use, durable and highly productive. In fact, our 30- and 40-series rotary tillers received the 2017 ASABE award for Outstanding Innovations in Product or Systems Technology.

When you're ready to dig in and work the soil, turn to Woods.



▶ VIDEO

See our Skid Steer Tiller on page 95

Woods' line of rotary tillers couples the best design features with outstanding performance for the discerning user. Our tillers will handle your landscaping and gardening projects with ease.



- 30, 40 and TC series models available as either forward or reverse rotation.
- On initial pass reverse rotation tillers will often till deeper and faster than forward rotation models.
- Slip clutch driveline protection is standard on all models.
- Skid shoes standard.

TRACTOR PTO HP RANGE: 12 - 35 HP

30 - Series Rotary Tillers Models

RT42.30/RTR42.30 | 41-inch
RT48.30/RTR48.30 | 47-inch

- Innovative double-flange blade support.
- Gear-driven side drive – less maintenance than chain-driven units.
- Rugged, heat-treated C-shaped tines for deep penetration in the toughest soils.
- Tapered tailgate removes furrow for a finished seedbed.
- Sturdy tubular integrated parking stand for easy storage and setup.
- 3-year warranty on input gearbox (includes seals).



TRACTOR PTO HP RANGE: 18 - 50 HP

40 - Series Rotary Tillers Models

RT60.40/RTR60.40 | 59-inch
RT72.40/RTR72.40 | 71-inch

- Innovative double-flange blade support.
- Gear-driven side drive – less maintenance than chain-driven units.
- 3-year warranty on input gearbox (includes seals).
- Rugged, heat-treated C-shaped tines for deep penetration in the toughest soils.
- Tapered tailgate removes furrow for a finished seedbed.
- Sturdy tubular integrated parking stand for easy storage and setup.





Superior design, durability and style

are built into every Woods tiller – especially our 30- and 40-series. The double-flange blade support design and efficient, low-maintenance gear drive are just two innovations that earned our 30- and 40-series rotary tillers the 2017 ASABE Award for outstanding innovations in product and systems technology.



Woods' innovative double flange design strengthens blade support and simplifies maintenance.

Robust gear-driven side drive provides years of reliable service and requires far less maintenance than chain-driven units.



Heat-treated, C-shaped tines penetrate deep, even in thick residue and loose, compacted or rocky soil.

Woods 3-year input gearbox warranty includes seals.

Fixed offset tiller width covers tire tracks with each pass.

Tapered tailgate removes furrow for a finished seedbed.

Adjustable skid shoes provide easy depth control.



Sturdy tubular integrated parking stand ensures easy storage and hook-up.



**TRACTOR PTO HP RANGE:
20 - 45 HP**

Models

TC60/TCR60 | 60-inch

TC68/TCR68 | 68-inch

TC74/TCR74 | 74-inch

- Three-point hitch: CAT 1.
- Specifically designed for compact tractors.
- Sturdy rear tailgate evenly distributes dirt — leaves a smooth, flat seed bed.
- Strong, cast-iron gearbox withstands rugged use.



SPECIFICATIONS		ROTARY TILLERS						
MODEL	RT42.30 RTR42.30	RT48.30/ RTR48.30	RT60.40/ RTR60.40	RT72.40/ RTR72.40	TC60/TCR60	TC68/TCR68	TC74/TCR74	
Tractor PTO HP Range	12 - 30 hp	15 - 35 hp	18 - 40 hp	20 - 50 hp	20 - 45 hp			
Tractor Hitch	Limited CAT 1 & CAT 1			CAT 1		Limited CAT 1 & CAT 1		
Working Width (inches)	41"	47"	59"	71"	60"	68"	74"	
Overall Width (inches)	51"	57"	69"	81"	67"	75"	81"	
Weight	478 / 484 lbs	502 / 508 lbs	570 / 578 lbs	621 / 630 lbs	597 / 604 lbs	634 / 641 lbs	665 / 672 lbs	
Maximum Tilling Depth	7"				7.5"			
Drive Type	gearbox				#80 chain			
Number of Tines / Number of Flanges	20 / 5	24 / 6	28 / 7	36 / 9	42 / 7	48 / 8	54 / 9	
Number of Tines per Flange	4 C-type (6 optional)				6 C-type			
Rotor Speed	210 rpm				240 rpm			
Tractor PTO Speed					540 rpm			
PTO Driveline Protection					slip clutch			
Gearbox Housing					heavy-duty cast iron			
Gearbox Drain Plug					yes			
Convertible Side Shift (right)	n/a				15.5"	19.5"	22.5"	
Quick-hitch Compatible					yes			

Woods offers tillers in forward or reverse rotation in 41" — 74" widths.



Forward rotation tillers are ideal for moist, wet, rocky, sandy or loose soil conditions.

Reverse rotation tillers work best in non-rocky soil conditions. They deliver a smoother top layer of soil by allowing ground cover to travel over the rotor top first, then incorporating it back into the ground beneath a fresh new layer of dirt. More often than not, users can achieve an exceptional seed bed with fewer passes when using a reverse rotation tiller.



DISC HARROWS

There's nothing like the smell of fresh-turned dirt, especially when you're doing what you love... working the land.

Whether you're breaking new ground for a garden, or tilling an existing nursery, food plot, vineyard or farm, Woods has the right – the best – disc harrow for your land. You will get years of productive, reliable, dirt-turning work.

Built with high-strength U.S. steel, these rugged disc harrows carry Woods' reputation for durability and reliability. Plus, these new discs are easy to use due to innovative design features like individually adjustable disc gangs that reposition with a single pin.



shown with optional mud scrapers

TRACTOR HP RANGE: UP TO 55 HP Models

DHS48 | 48-inch **DHS64** | 64-inch
DHS80 | 80-inch

- Mud scrapers that prevent clogging, increase productivity.
- Furrow fillers (DHS64, DHS80).



Tapered frame design balances individual disc gangs for easy adjustments



shown with optional drawbar, furrow fillers and mud scrapers

TRACTOR HP RANGE: 45 - 85 HP Models

DHM80 | 80-inch **DHM96** | 96-inch

- Furrow fillers to reduce end ridges.
- Rear drawbar for towing equipment.
- Mud scrapers that prevent clogging, increase productivity.

SPECIFICATIONS	DISC HARROWS				
MODEL	DHS48	DHS64	DHS80	DHM80	DHM96
Tractor Engine HP	up to 35 hp	25-45 hp	35-55 hp	45-75 hp	55-85 hp
Tractor Hitch	CAT 1, Lim. CAT 1, CAT 0 optional	CAT 1		CAT 1 and 2	
Width (inches)	48"	64"	80"	80"	96"
Average Weight (lbs) - depending upon blade type	390	508	590	845	960
Disc Blade Type	notched	notched; or combination smooth and notched			
Average Weight Distribution per Blade (lbs)	33	36	33	47	44
Disc Diameter / Quantity	16" / 12	18" / 14	18" / 18	20" / 18	20" / 22
Disc Spacing	7.5" front and rear		9" front, 7.5" rear		
Gang Axle Size (inches)	1" square			1 1/8" square	
Frame Construction	3" x 3" tube and angle		3" x 3" tube and channel		3" x 3" tube
Quick-hitch Compatible	Yes				



▶ VIDEO

Woods' Advantages

- Individual disc gangs adjust easily with one pin.
- Rugged, high-strength steel frame and gangs mean years of worry-free performance.
- Independent disc gangs angle from 0 to 21 degrees to match your soil type and tilling job.
- Heavy down force makes each blade dig deeper, work harder in one pass.



shown with optional drawbar, furrow fillers and mud scrapers

**TRACTOR HP RANGE:
50 - 110 HP**

Models

DHH108T | 108-inch **DHH126T** | 126-inch
DHH144T | 144-inch

Additional features and options:

- Advanced offset/tandem blade gangs leave an even finish across entire width – no center ridge.
- Extended tongue design allows tight turns without hitting tractor tires.
- Simple ratchet jack levels unit from front to back.
- Optional rear drawbar for towing equipment.
- Optional mud scrapers and furrow fillers to increase productivity.

SPECIFICATIONS		DISC HARROWS		
MODEL	DHH108T	DHH126T	DHH144T	
Tractor Engine HP	50-75 hp	60-100 hp	70-110 hp	
Tractor Hitch	Pull-type, 1.25" pin			
Width (inches)	108"	126"	144"	
Average Weight (lbs) - depending upon blade type	2,525	2,690	2,860	
Disc Blade Type	notched; smooth; or combination			
Average Weight per Blade (lbs)	105	96	90	
Disc Diameter / Quantity	20" or 22" / 24	20" or 22" / 28	20" or 22" / 32	
Disc Spacing	9" front and rear			
Gang Axle Diameter (inches)	1 1/8" square			
Frame Construction	4" x 3" tube			
Quick-hitch Compatible	N/A			

WORKING AS AN INNOVATOR IS JUST TAKING TWO DIFFERENT IDEAS AND BRINGING THEM TOGETHER

Todd Wehler Product Design Engineer

When we started working on the new seeder, we talked to more than 40 dealers and customers about how their current seeder was or wasn't meeting their needs and what we could do differently. In solving their problems, we invented three patented features, but most of all, we created a versatile, cost-effective seeder that our customers love.



SUPERIOR DESIGN ▪ **SUPERIOR DURABILITY** ▪ **SUPERIOR STYLE**

SEEDERS AND CULTIPACKERS

Woods' seeders give you the flexibility to handle primary seeding, over-seeding, and can even plant up to three types of seed in one pass. You choose the combination of seed boxes that fits your application. That means efficient, one-pass planting that maximizes efficiency and productivity.

Woods cultipackers are a high quality seed bed tool backed by our reputation for durability and reliability. Choose this rugged, easy-to-use implement to crush dirt clods and eliminate air pockets prior to planting. After broadcast-seeding, use the cultipacker to lightly firm the soil around seeds.

What can Woods seeders plant? Here is a partial list...

Cool Season Grass and Cereal Grains (large seeds)

Annual Ryegrass
Barley
Buckwheat
Buffalo Grass
Chufa
Corn (small rounds)
Fescue
Kentucky Bluegrass Blends
Kidney Beans
Lablab
Lima Beans
Oats
Orchardgrass
Peas
Perennial Ryegrass
Snow Peas
Sorghum
Soybeans
Sudan
Sugar Beets
Sunflower
Triticale
Wheat

Legume Box (small seeds)

Alfalfa
Bahai
Bermuda
Birdsfoot Trefoil
Black-eyed Susan
Brassica
Brown Top Millet
Carpet Grass
Centipede
Chicory
Clover
Fescue
Forbes
Green SprangletopKale
Kentucky Bluegrass
Kleingrass
Plains Bristlegrass
Radish
Rape
Side Oats Grama
Sudan
Sugar Beets
Switchgrass
Timothy
Turnip
Zoysia

Native Warm Season Grass Box (fluffy, light-weight seeds)*

Big Bluestem
Brome
Canadian Wild Rye
Indian Grass
Little Bluestem
Sideoats Grama

*Precision Super Seeder only

FOOD PLOT SEEDERS

Plant up to three types of seed in one pass. Ideal for hunters and small acreage farmers seeding legumes and larger seeds.

- Three seed box choices — one cool season and two legume — can plant a variety of seeds like alfalfa, clover, corn, sorghum, soybeans, turnips and wheat.
- A trailing cultipacker firms the seed bed for perfect seed-to-soil contact that's ready to trap moisture for germination.
- Plant cool season seeds, in rows, at a deeper depth while evenly broadcasting up to two types of legume seeds at a shallow depth — all in one pass.



FPS72
shown with optional mud scrapers, legume seed boxes and cultipacker

TRACTOR HP RANGE: 25 - 65 HP

Models

FPS48 | 49-inch

FPS60 | 60-inch

- Three-point hitch: CAT 1 & 2.
- Working widths from 48–60 inches.

TRACTOR HP RANGE: 35 - 125 HP

Models

FPS72 | 72-inch

FPS84 | 84-inch

- Three-point hitch: CAT 1 & 2.
- Working widths from 72–84 inches.

SPECIFICATIONS		FOOD PLOT SEEDERS			
MODEL	FPS48	FPS60	FPS72	FPS84	
Tractor Engine HP Range	25-45 hp	30-65 hp	35-85 hp	40-125 hp	
Tractor Hitch	CAT 1 & 2			CAT 2	
Working Width (inches)	49"	60"	72"	84"	
Weight – Standard Configuration* (lbs)	821	899	1,196	1,320	
Weight – Fully Configured** (lbs)	1,084	1,222	1,578	1,762	
Drive Type	ground				
Number of Seed Boxes Available	3				
Seed Box Ratio	1-speed				
Seed Cups (7" spacing)	7	8	10	12	
Row Units	standard				
Cool Season Seed Box Capacity (bushel)	4.00	5.00	6.00	7.00	
Legume Seed Box Capacity (bushel)	1.00	1.25	1.50	1.75	
Disc Blades	(8) 16" notched		(10) 18" notched		
Cast Iron or Nylon Trailing Cultipacker	optional (9.5" diameter cast iron or 11" diameter nylon)				
Calibration Tray & Crank Handle	standard				
Mud Scrapers & Frame Platform	optional				
ASABE Quick-hitch Compatible	yes				

* Includes spiked drive roller, disc blades, cool season seed box, and row units.

** Includes cultipacker drive roller, disc blades, cool season seed box, row units, 1st and 2nd legume seed boxes, and nylon trailing cultipacker.



PSS84
shown with optional
seed boxes and cultipacker

The Precision Super Seeder gives you the flexibility to handle primary seeding, over-seeding, and applications such as native grasses and food plots. It's the most versatile seed box combination on the market.

- Three seed box options — cool season, warm season, and legume — let you plant anything from rye and oats to prairie grasses, wild flowers, radishes and soybeans.
- Efficient, one-pass planting of up to two seed types at one depth and legume seeds at a different depth — with models equipped with three seed boxes.
- All seed boxes can be engaged and disengaged independently with a single lynch pin — no tools required.

TRACTOR HP RANGE: 25 - 65 HP

Models

PSS48 | 49-inch

PSS60 | 60-inch

- Three-point hitch: CAT 1 & 2.
- Working widths from 48–60 inches.

TRACTOR HP RANGE: 35 - 125 HP

Models

PSS72 | 72-inch

PSS84 | 84-inch

- Three-point hitch: CAT 1 & 2.
- Working widths from 72–84 inches.

SPECIFICATIONS	PRECISION SUPER SEEDERS			
	PSS48	PSS60	PSS72	PSS84
MODEL				
Tractor Engine HP Range	25-45 hp	30-65 hp	35-85 hp	40-125 hp
Tractor Hitch	CAT 1 & 2			CAT 2
Working Width (inches)	49"	60"	72"	84"
Weight – Standard Configuration* (lbs)	779	861	1,132	1,249
Weight – Hunting Edition Configuration** (lbs)	1,044	1,222	1,565	1,761
Drive Type	ground			
Number of Seed Boxes Available	3			
Seed Metering	fluted and picker wheel			
Seed Cups (7" spacing)	7	8	10	12
Cool Season Seed Box Capacity (bushel)	4.00	5.00	6.00	7.00
Native Warm Season Seed Box Capacity (bushel)	5.00	6.25	7.50	8.75
Legume Seed Box Capacity (bushel)	1.00	1.25	1.50	1.75
Front Roller Spikes	(128) .5" x 1.75" carbide steel	(160) .5" x 1.75" carbide steel	(192) .5" x 1.75" carbide steel	(224) .5" x 1.75" carbide steel
ASABE Quick-hitch Compatible	yes			

* Standard configuration consists of frame with spiked drive roller, adjustable front spiked rollers and cool season seed box

** Hunting Edition configuration consists of frame with spiked, ground drive roller, adjustable front disc blades, cool season seed box, legume seed box and cast iron cultipacker

COMPACT SUPER SEEDER

The Woods Compact Super Seeder is everything you need in one compact cultivation and planting package. In one pass you can prepare the seed bed, precisely drop seeds at two different depths, then firm the bed for improved germination.



▶ VIDEO

Tractors

CSS48: 15 HP - 35 HP

CSS60: 20 HP - 45 HP

ATVs and UTVs (4WH)

CSS48: minimum 350cc

CSS60: minimum 400cc



Choose the Features that Fit Your Project

Every model starts with a spiked drive roller and a cool season seed box. Then, choose the front tool that will prepare your seed bed.



Add one, or all, of these options to improve your productivity and versatility:

1.



Spiked roller with adjustable angles that will penetrate thatch and aerate lawns. Or, angle it to break up the surface and remove stands of turf.

2.



Adjustable disc blades that will cut into and work the soil. Easily adjust the blade angles to till more aggressively depending upon soil conditions.

3.

Add a legume seed box and now you can plant two seeds at different depths in one pass.

4.

A rear cultipacker that increases seed-to-soil contact, firms the seed bed, and creates furrows to trap and channel water which improves germination rates.

5.

Mud scrapers which help keep blades free from dirt clods, mud and clay.

6.

An electric tow kit for ATVs and UTVs and hydraulic tow kit for tractors that make it easy to transport.

Plus, a fast/slow chain drive, road lights, seed stop plates – the options offer you nearly endless ways to customize your Woods Compact Super Seeder.



TRACTOR HP RANGE: 15 - 35 HP

Models

CSS48 | 48-inch

- Three-point hitch:
CAT 1/Limited CAT 1
- Working width 48 inches
- ATV/UTV minimum 350cc

TRACTOR HP RANGE: 20 - 45 HP

Models

CSS60 | 60-inch

- Three-point hitch:
CAT 1/Limited CAT 1
- Working width 60 inches
- ATV/UTV minimum 400cc



▶ VIDEO

SPECIFICATIONS		COMPACT SUPER SEEDERS	
MODEL	CSS48	CSS60	
Tractor Engine HP	15-35 hp	20-45 hp	
Tractor Hitch	CAT 1/Limited CAT 1		
ATV/UTV Engine Size	minimum 350cc	minimum 400cc	
Working Width (inches)	48	60	
Overall Width	57	69	
Weight with Seed, Depending upon Configuration (lbs)	395-679	487-810	
Drive Type	ground-driven spiked roller		
Number of Seed Boxes Available	1 or 2		
Seed Metering	6 seed cups	8 seed cups	
Seed Box Ratio	5.1:1 or 14.4:1	5.1:1 or 14.4:1	
Cool Season Seed Box with Agitator	standard		
Cool Season Seed Box Capacity (bushel)	1	1.25	
Legume Seed Box	optional		
Legume Seed Box Capacity (bushel)	1	1.25	
Front Tool Choices	6 - 16" notched disc blade or spiked roller	8 - 16" notched disc blade or spiked roller	
Calibration Tray	standard		
Crank Handle	standard		
Spring-loaded Trailing Cultipacker	optional		
Speed Ranges	turf seed range 0-700 lbs/acre (cool season); food plot range 0-30 lbs/acre (legume)		
Options	fast/slow chain drive, Quick Hitch bushings, mud scrapers, seed stop plates, highway lights, tow kit		
ASABE Quick Hitch	add hitch pin bushings to make CAT 1 quick-hitch compatible		

**GOOD THINGS...
PRECISION METERING,
MANEUVERABILITY,
VERSATILITY,
PRODUCTIVITY,
DURABILITY...
COME IN COMPACT
PACKAGES
FROM WOODS.**

Ideal for small-scale planting, such as food plots, lawns, gardens, wildflower meadows, waterways and roadways. Widths 48 or 60 inches and lighter weight so you can maneuver into formerly unreachable areas.

Additional Features Standard on Both Models


- The calibration system includes seed charts, a calibration tray and crank for accurate seed rates. 

- Windowed seed cups and clear PVC tubes allow you to easily monitor the flow of seeds.

- A quick and easy disconnect – pull a pin and one or both seed boxes stop to make it a tilling tool for preparing the ground. Till your seed bed, then replace the pin and engage the seeding function for a final pass. 

Precision Metering –

Precisely measure out seeds, reducing waste, plus enjoy the durability of metal (not plastic) meters.

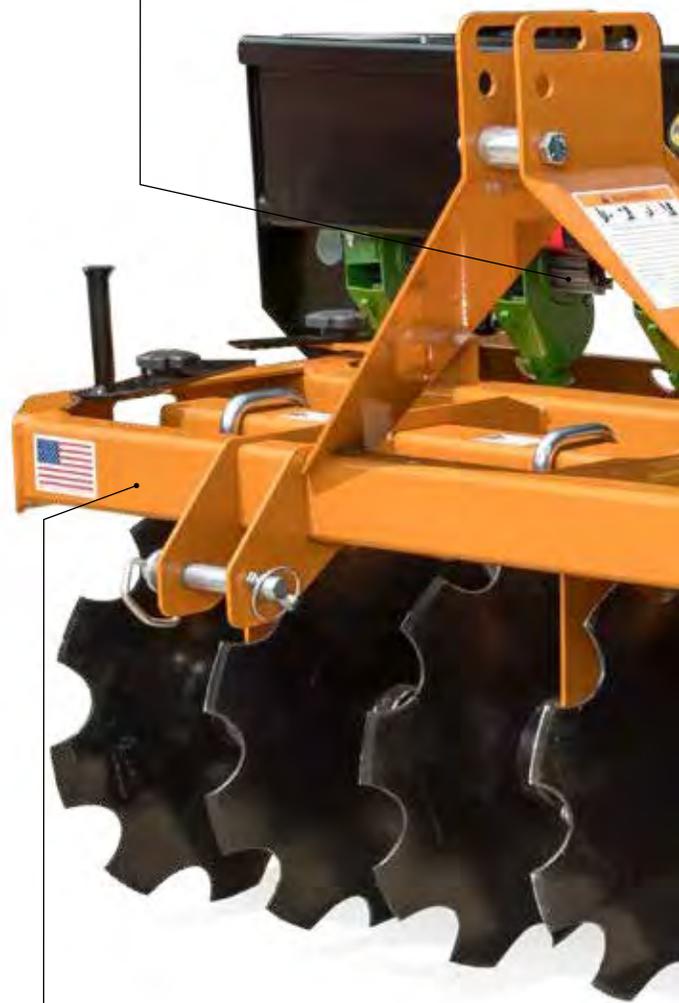

- **Maneuverability** – Easily weave into narrow spaces and make tight turns to plant areas that may not be accessible with a larger tractor and planter.

COMPACT SUPER SEEDER

CS



• **Versatility** – Handle a wide range of seeds from Black-eyed Susans to corn. See our planting guide.

• **Productivity** – Simultaneously plant two seed types at two different depths in one pass.

*WOODS
Exclusive*

• **Durability** – Expect years of work from a rugged, Grade 80 steel body.

**TRACTOR HP RANGE:
UP TO 75 HP**

Models

C48T | 48-inch

C72 | 72-inch

C84 | 84-inch


- Attaches to ATVs, UTVs and tractors up to 75 hp.
- Notched, cast-iron cultipacker wheels provide the perfect seed-to-soil contact to trap moisture for higher germination rates.
- Flip-over hitch easily changes from towing to working the dirt.
- Rugged frame and axle are designed for durability.
- Greasable, triple-sealed bearings are easy to maintain and extend work life.
- Tow tires and weight rack are standard on C48T model.
- Parking stand is standard on C72 and C84 models. Add optional tow kit and mud scrapers for greater versatility and productivity.



VIDEO



SPECIFICATIONS		CULTIPACKERS		
MODEL	C48T	C72	C84	
Tractor Engine HP	up to 30 hp	20-75 hp		
Hitch Type	pull-type	3-pt		
Hitch Category	2" ball	CAT 1 & 2		
Working Width (inches)	48"	72"	84"	
Overall Width (inches)	67"	82"	94"	
Length	58" (with tongue)	15.75" (3-pt hitch); 91.5" (with tongue)		
Weight / Shipping Weight	275 lbs / 289 lbs	371 lbs / 390 lbs	420 lbs / 439 lbs	
Axle Size	1.75"			
Cultipacker Wheel Diameter	9.5"			
Cultipacker Wheel Quantity	21	32	37	
Greasable, Triple-sealed Bearings	Yes			
Pneumatic Transport Tires	standard (10" x 3.25")	optional (10" x 3.25")		
Weight Rack	standard	n/a		
Parking Stand	n/a	standard		
Mud Scrapers	n/a	optional		

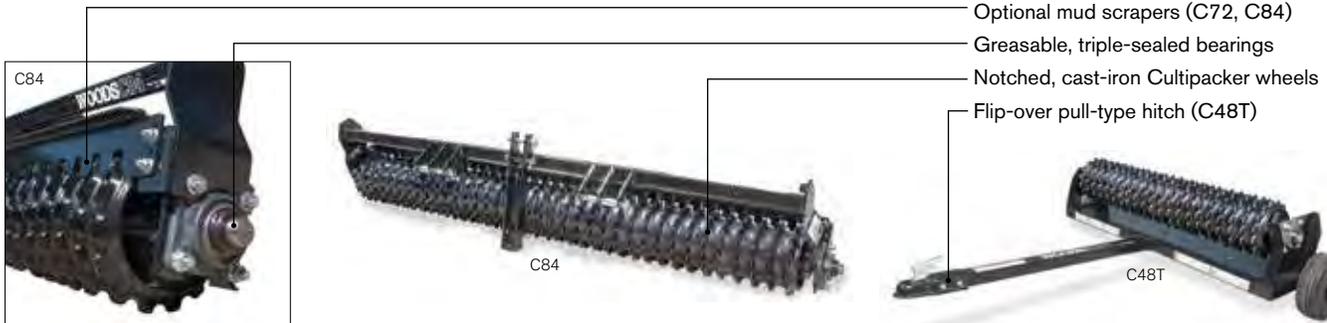

**WHEN YOU
MARRY 35 YEARS
OF KNOW-HOW
WITH WHAT
CUSTOMERS WANT,
YOU CAN'T HELP
BUT DEVELOP A
SUPERIOR PRODUCT**

Ron Parkins Engineering Manager

Our newest backhoe is the culmination of 35 years of experience in designing compact backhoes. That's what allows us to create a big, powerful backhoe relative to the size of utility and compact tractors. When you marry 35 years of know-how with extensive research on what customers want, you can't help but develop a superior product.



SUPERIOR DESIGN ■ SUPERIOR DURABILITY ■ SUPERIOR STYLE



GROUNDBREAKER BACKHOES

We believe in heavily researching what customers think about the equipment they use and what they need – really need – before we ever start designing. And, given the depth and breadth of experience at Woods, we agree with Ron that a superior product is simply inevitable.

Industry experts agree. The Groundbreaker® BH100 backhoe won the 2020 ASABE award for outstanding innovation in engineering and technology.



Unmatched Performance

Combine an excavator - style curved boom (first offered by Woods on a residential model) with other Woods innovations like a unique easy-on/easy-off mounting system, serrated edges, and construction-grade buckets, and you've got the best built backhoe in the industry.

Groundbreaker® backhoes are powerful diggers that are simple to service, require no tools to attach and detach, and offer greater bucket capacity than any other bucket in its class.

Durable Construction

Woods' reputation for premium quality products extends to our line of backhoes. Welded to American Welding Society standards and tested in rigorous real-life conditions, our backhoes are built to handle your most challenging jobs.

- Heavy-duty cylinders endure greater force and last longer.
- Easy to service hoses and pins make maintenance a breeze.
- Greasable end pins are simple to maintain and extend the work life.

Choose Your Color!

Available in black or painted to match most tractor brands



Backhoes Made So Well the Warranty Covers Your Tractor

Woods stands behind its backhoes, loaders and mounts with a 2-year limited warranty that includes the tractor. If your tractor manufacturer threatens to void its warranty as a result of installing one of our attachments, we'll cover the warranty if our product damages or compromises your tractor's frame integrity. We're that confident.

Compare our loader and backhoe warranty to others and you'll find that Woods stands behind its attachments like no one else.





SUPERIOR DESIGN
SUPERIOR DURABILITY
SUPERIOR STYLE



WOODS Exclusive

→ **2-year Limited Warranty**
 includes tractor.

→ **Operator's Station**

Comfortably work with the adjustable seat and roomy, non-slip, walk-through platform.

Innovation

Woods was the first to offer a curved boom on a residential backhoe for greater visibility and control.

→ **Swing Cushioning**

Swing Cushioning provides smooth, superior control – even at the ends of the swing arc.



→ **3-point Saf-T-Lok® hitch**

No tools needed to attach or detach. (sub-frame shown)

SUPERIOR DESIGN


Reach farther and move more material with the extra-long reach, plus save time on repositioning your tractor. Saw-tooth edges on the thumb, dipper and bucket allow you to grip and rip through material.

SUPERIOR DURABILITY

Groundbreaker® – The name says it all. The newly designed BH85 and BH100 offer 4,600 lbs of powerful bucket digging force to break through hard, rocky, root-filled ground with ease. Tested in real-world conditions, the entire Groundbreaker line offers an excavator-style boom, rugged construction, and unique easy-on/easy-off mounting system to give you the best built backhoe in the industry.

SUPERIOR STYLE

Work comfortably for hours with the adjustable seat and the roomy, walk-through, non-slip operator's platform. Steps on the mounts and grab rails on the valve console make it easy to climb up and get to work. The curved, box-section boom provides excellent visibility into the trench.

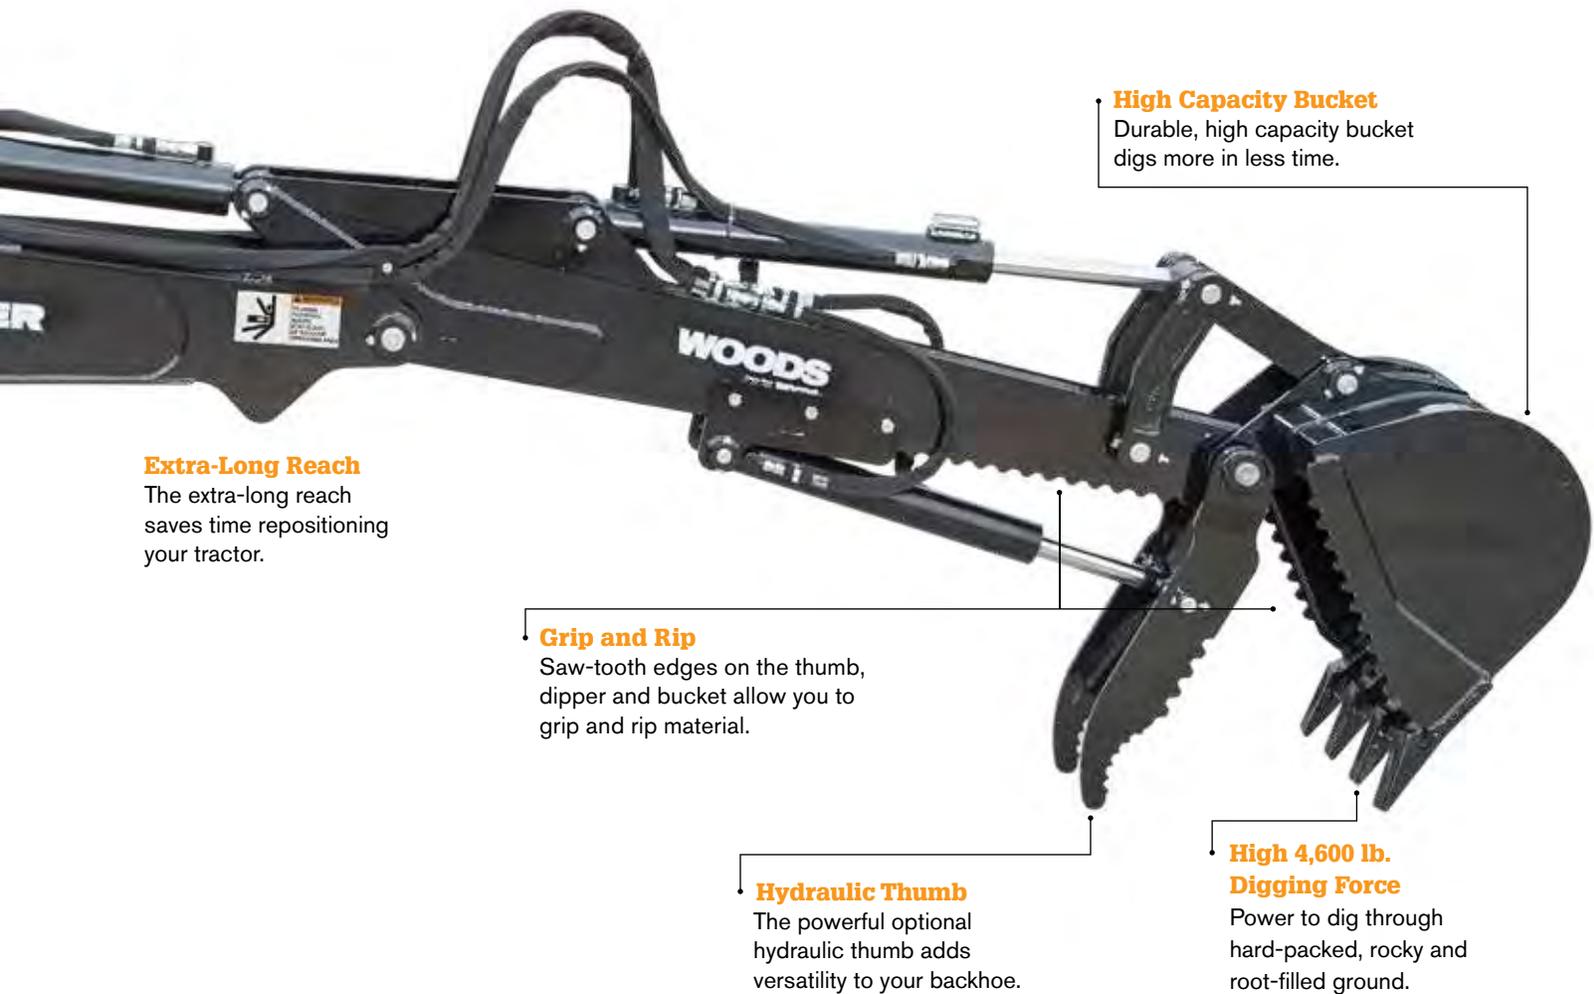

Extra-Long Reach

The extra-long reach saves time repositioning your tractor.

High Capacity Bucket

Durable, high capacity bucket digs more in less time.

Grip and Rip

Saw-tooth edges on the thumb, dipper and bucket allow you to grip and rip material.

Hydraulic Thumb

The powerful optional hydraulic thumb adds versatility to your backhoe.

High 4,600 lb. Digging Force

Power to dig through hard-packed, rocky and root-filled ground.

GB BH65 GROUNDBREAKER® BACKHOE

The latest Woods Groundbreaker® backhoes are rugged and affordable —ideal for trenching, excavating, and landscaping.



▶ VIDEO



TRACTOR PTO HP RANGE:
15 - 30 HP

Model

BH65 | 6.5-foot

- Curved boom offers better visibility and reaches over obstacles with little repositioning.
- Bolt-on bucket teeth are durable and easy to replace.
- Greasable end pins are simple to maintain and extend work life.
- High ramp angle and ground clearance make transporting easy.
- Sub-frame or 3-point hitch mounts are compatible with most loaders and undermount mowers.
- Optional mechanical thumb available.

TRACTOR PTO HP RANGE:
20 - 40 HP

Model

BH75 | 7.5-foot

- Curved boom offers better visibility and reaches over obstacles with little repositioning.
- Bolt-on bucket teeth are durable and easy to replace.
- Greasable end pins are simple to maintain and extend work life.
- High ramp angle and ground clearance make transporting easy.
- Sub-frame or 3-point hitch mounts are compatible with most loaders and undermount mowers.
- Optional mechanical thumb available.

BH75 GROUNDBREAKER® BACKHOE

GB

SPECIFICATIONS	GROUNDBREAKER BACKHOES	
	BH65	BH75
Tractor PTO HP	15 - 30	20 - 40
Digging Depth - 2' Flat Bottom (inches)	78 (6.5 ft)	90 (7.5 ft)
Digging Depth - 8' Flat Bottom (inches)	52	70
Reach from Swing Pivot (inches)	102	119
Loading Height (inches)	60	73
Loading Reach (inches)	33.5	46
Transport Height (inches)	66.5	74
Transport Length (inches)	42	45
Approx. Weight - frame only (lbs)	695	842
Swing Arc (degrees)	150	180
Bucket Rotation (degrees)		180
Stabilizer Spread - Up (transporting) (inches)		52
Stabilizer Spread - Down (operating) (inches)		83
Relief Pressure	2,030 psi	2,465 psi
Bucket Digging Force (lbs)	2,800	3,380 lbs
Dipperstick Digging Force (lbs)	1,590	2,230
Trenching Bucket Widths (inches)	9, 12, 16	9, 12, 16, 18, 24
Thumb		optional mechanical
Flip-Over Stabilizer Pads		standard
Stabilizer Street Pads		optional
PTO Pump Kit	N.A.	optional
Cemetery / Bellhole Bucket		N.A.
Ditching Bucket		N.A.
2-Cylinder Swing	-	yes

Don't just dig...

pull, pick up and move heavy objects with the optional thumb that adjusts easily with a single pin.



GB BH85 GROUNDBREAKER® BACKHOE



Woods' BH85 and BH100 Groundbreaker® backhoes are the culmination of 35 years of experience designing compact backhoes, including the first curved boom on a residential model. Add that to months of research uncovering what customers really want and the result is a superior product. **It's inevitable.**

**TRACTOR PTO HP RANGE:
30 - 100 HP**

Model

BH85 | 102-inch

BH100 | 120-inch



VIDEO

Designed after months of research with backhoe operators to ensure a rugged, versatile, powerful and comfortable backhoe.

- Maximum digging depths of 8.5 feet and 10 feet.
- Heavy-duty, high capacity bucket widths from 12 to 36 inches.
- Extra-long reach and digging depths saves time repositioning.
- 4,600 lb digging force powers through hard, rocky, root-fill ground.
- Saw-tooth edges on thumb, dipper and bucket can grip and rip.
- Adjustable seat and roomy operator area offer hours of comfortable digging.
- Sub-frame or 3-point hitch mounts are compatible with most loaders and undermount mowers.
- Bolt-on bucket teeth are durable and easy to replace.
- Greasable end pins are simple to maintain and extend work life.
- High ramp angle and ground clearance make transporting easy.
- Optional mechanical or hydraulic thumb add versatility.
- Two-year limited warranty covers your tractor.

BH100 GROUNDBREAKER® BACKHOE

GB




Woods BH100 backhoe received the 2020 ASABE award for outstanding innovation in engineering and technology.

BH85/BH100 are ideal for:

- Tractors up to 100 hp.
- Construction and demolition.
- Trenching, drainage and excavation work.
- Removing trees, stumps, or shrubs.
- Precisely pick-and-place rocks, concrete chunks, logs and landscape timbers.
- Digging efficiently in a wide variety of soil conditions.
- Repositioning odd-shaped, over-sized materials.

SPECIFICATIONS		GROUNDBREAKER BACKHOES	
MODEL	BH85	BH100	
Tractor PTO HP	30 - 100	40 - 100	
Digging Depth - 2' Flat Bottom (inches)	102 (8.5-ft)	120 (10-ft)	
Digging Depth - 8' Flat Bottom (inches)	82	102	
Reach from Swing Pivot (inches)	141	161	
Loading Height (inches)	83	100	
Loading Reach (inches)	61	70	
Transport Height (inches)	94	104	
Transport Length (inches)	55	55	
Approx. Weight - frame only (lbs)	1,275	1,320	
Swing Arc (degrees)	180		
Bucket Rotation (degrees)	180		
Stabilizer Spread - Up (transporting) (inches)	71		
Stabilizer Spread - Down (operating) (inches)	102		
Relief Pressure	2,465 psi		
Bucket Digging Force (lbs)	4,600		
Dipperstick Digging Force (lbs)	2,940	2,720	
Trenching Bucket Widths (inches)	12, 15, 18, 24		
Thumb	optional mechanical or hydraulic		
Flip-Over Stabilizer Pads	standard		
Stabilizer Street Pads	optional		
PTO Pump Kit	optional		
Cemetery / Bellhole Bucket	36		
Ditching Bucket	36		
2-Cylinder Swing	yes		

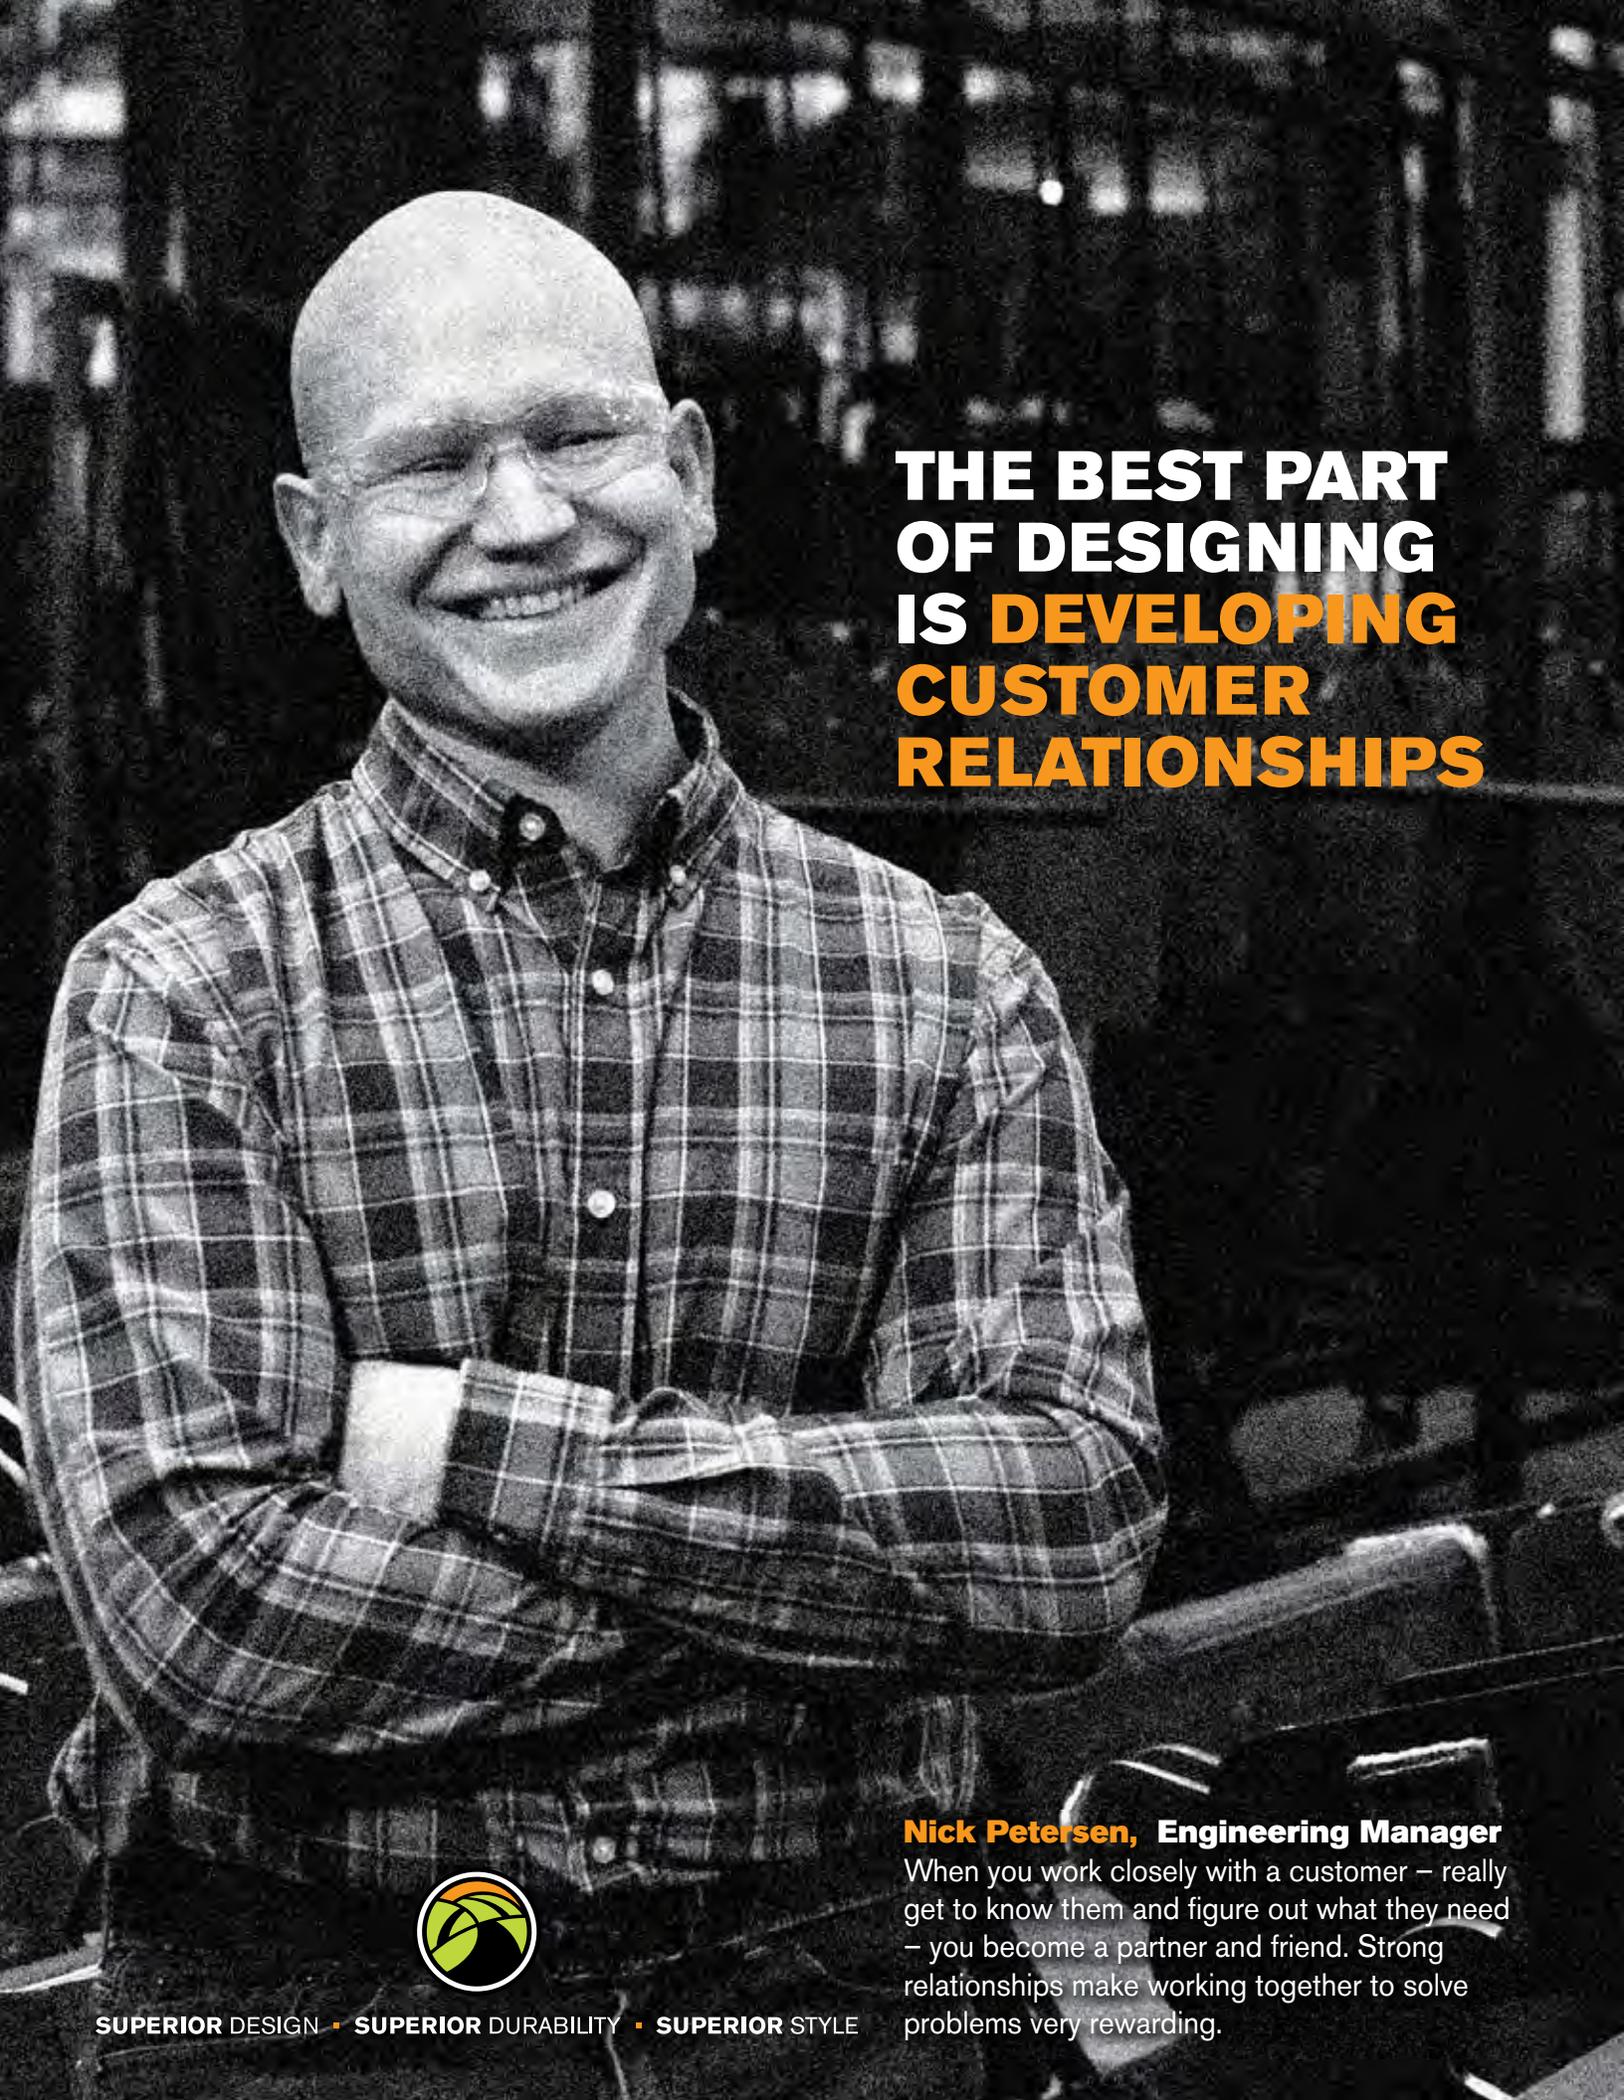A black and white photograph of a man with glasses and a plaid shirt, smiling and standing in a factory. The background is filled with industrial machinery and equipment.

**THE BEST PART
OF DESIGNING
IS DEVELOPING
CUSTOMER
RELATIONSHIPS**

Nick Petersen, Engineering Manager

When you work closely with a customer – really get to know them and figure out what they need – you become a partner and friend. Strong relationships make working together to solve problems very rewarding.



SKID STEER AND CONSTRUCTION ATTACHMENTS

Chances are, you invested in a skid steer loader or compact excavator for its power, maneuverability and versatility. Take your investment to the next level with Woods branded attachments. Our offering ensures that you always have the right attachment for the job.

Whether you're a farmer cleaning out feed lots and moving seed, a landscape contractor spreading mulch and hauling pavers, or a municipal worker maintaining parks and pavement, count on Woods to keep you at the height of productivity.

This section features our most popular attachments for farm and ranch applications. Our complete line of top-quality skid steer attachments includes:

Angle Brooms

Augers

Bale Spears

Cold Planers

Excavator Buckets

Excavator Couplers

Root Grapple

Scrap Grapple

High-capacity Buckets

Low-profile Buckets

Pallet Forks

Pavement Saws

Rock Wheels

Tillers

Toothbars

Utility Buckets

Vibratory Rollers

For a complete look at Woods' offering for construction machines visit WoodsConstructionEquipment.com.



▶ VIDEO



BALE SPEARS & TOOTHBARS

Bale Spears

Woods' Alitec single, double, and triple bale spears let you efficiently move and stack large round and square bales.

- BS3044** | Single Spear
- BS6044** | Double Spear
- BS4032** | Triple Spear

All models are available for skid steer and tractor attachment systems:

- Durable drop-forged spears and high-strength steel frame provide longer product life.
- High carry load ratings increase performance.
- Optional step kit enables easier access to skid steer cabs.
- Optional vertical backstops on the triple bale spear allow stacking while transporting.
- Skid steer, ISO, or John Deere® Quick Attach available.



BS3044
Single spear

SPECIFICATIONS		BALE SPEARS		
MODEL	BS3044	BS6044	BS4032	
Number of Spears	1	2	3	
Number of Stabilizer Spikes	2	n/a		
Usable Spear Length	44"		32"	
Spear Diameter	45mm		36mm	
Maximum Carry Load (lbs)	3,000	6,000	4,000	
Spear Material	drop-forged steel			
Frame Material	high-strength steel plate			
Frame Dimensions (Width x Height)	45" x 21"		57.5" x 21"	
Quick Attach Systems	SAE J2513 Skid Steer, ISO 23206 Euro, John Deere 300/400/500 series loaders			
Step Kit	optional			
Vertical Backstops	n/a		standard	


Toothbars

- For farm and small loaders and most skid loaders.
- Available in half-inch increments from 48 to 84 inches.
- Includes fasteners to attach to any skid loader bucket without a bolt-on edge installed.
- One-half by four-inch high strength steel.
- Shanks are high strength steel.



SPECIFICATIONS									
MODEL	CETB480	CETB540	CETB600	CETB630	CETB660	CETB720	CETB730	CETB780	CETB840
Width (inches)	48"	54"	60"	63"	66"	72"	73"	78"	84"
Number of teeth	6		7		8		9		
Weight (lbs)	49	50	59	60	66	69	69	75	79

Woods' versatile, new Pallet Forks are designed with a full-height frame and walk-thru capability. Ideal for lifting and moving material with your loader or skid steer. Choose from 2,200, 4,400, or 6,600 lb. fork capacity.

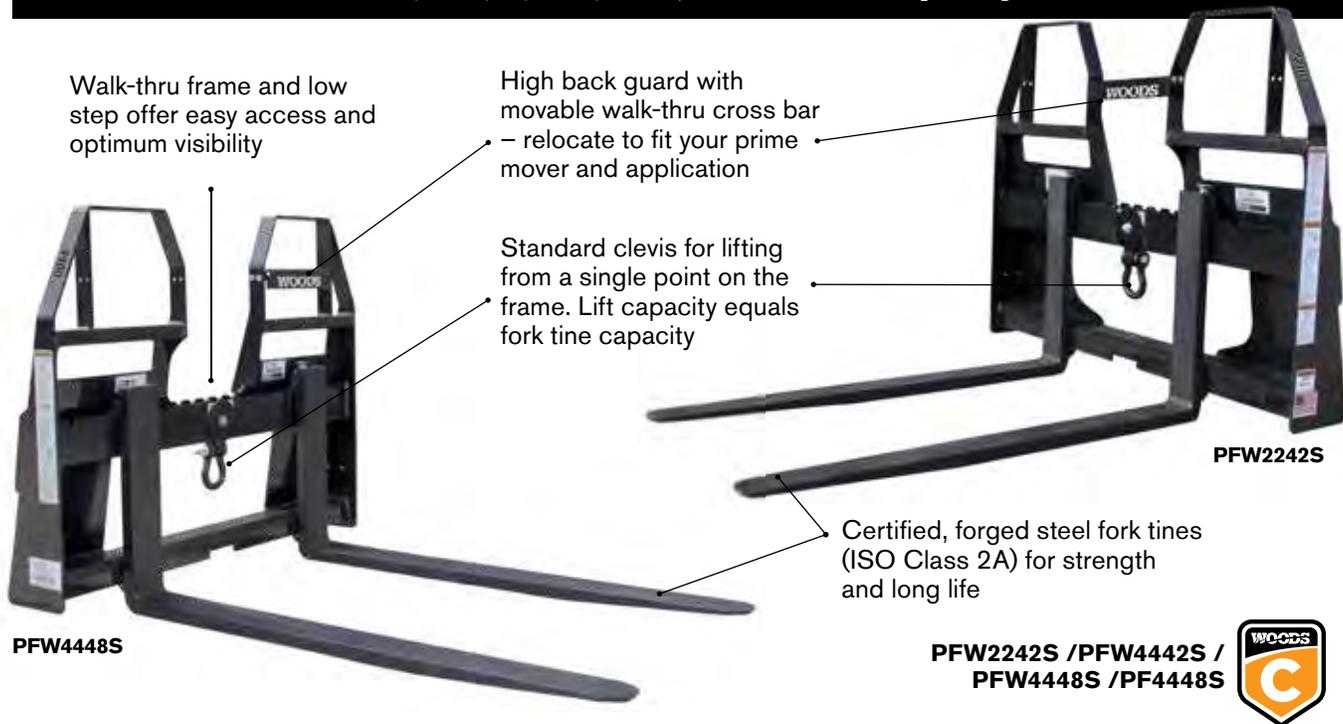

SPECIFICATIONS		PALLET FORKS			
MODEL	PFW2242S	PFW2242JD	PFW4442S	PFW4442JD	
Frame Type	walk-thru with full frame option				
Coupler System Compatibility	skid steer	John Deere®	skid steer	John Deere®	
Operating Weight (lbs)	275	255	360	360	
Fork Capacity at 19.7" from Tine Face (lbs)	2,200	2,200	4,400	4,400	
Fork Tine Dimensions (L x W x H)	42" x 3.2" x 1.2"		48" x 3.9" x 1.4"		
Fork Tine Spread Range	12" - 45" outside to outside				
Fork Tine Type	double hook lock down (ISO Class 2A)				
Clevis	standard				

SPECIFICATIONS		PALLET FORKS				
MODEL	PF4448S	PFW4448S	PFW4448JD	PFW4448E	PFW6648S	PFW6648E
Frame Type	full frame	walk-thru with full frame option				
Coupler System Compatibility	skid steer	skid steer	John Deere®	ISO 23206	skid steer	ISO 23206
Product Weight (lbs)	390	380	380	370	470	455
Fork Capacity at 19.7" from Tine Face (lbs)	4,400	4,400	4,400	4,400	6,600	6,600
Fork Tine Dimensions (L x W x H)	48" x 3.9" x 1.4"			48" x 3.9" x 1.8"		
Fork Tine Spread Range	12" - 45" outside to outside					
Fork Tine Type	double hook lock down (ISO Class 2A)					
Clevis	standard					

Robotically welded for consistent high quality. Compatible with Skid Steer (ISO 24410), John Deere®, and ISO 23206 Quick Attach Systems. Learn more about Woods Loader and Skid Steer attachments at woodsequipment.com.

Root Grapples

HLRG Series – The Woods Alitec™ Root Grapple moves bulky, hard-to-handle materials easily.

HLRG65 | 65-inch

HLRG72 | 72-inch

HLRG79 | 79-inch

HLRG86 | 86-inch

- Root Grapple lets dirt sift through when loading rocks, trash, and other loose material.
- Twin hydraulic cylinders allow for independent clamping on uneven material.
- Woods' proprietary serrated cutting edge holds fast to trees and debris.
- Standard cylinder guards.
- Optional slat kit adds versatility by reducing tine spacing when application requires.
- Unique design allows smooth grading of surfaces after removing debris.
- Skid steer or ISO Quick Attach available.

Scrap Grapples

HLSG Series – The Woods Alitec™ Scrap Grapple is ideal for cleaning up construction, demolition and storm debris.

HLSG65 | 66-inch

HLSG72 | 73-inch

HLSG79 | 78-inch

HLSG84 | 84-inch

- Moves bulky, hard-to-handle materials easily.
- Twin hydraulic cylinders allow for independent clamping on uneven material.
- Single, beveled reversible bolt-on cutting edge with back-up bar.
- Standard cylinder guards.
- Optional bolt-on, double beveled edge and optional end plate extensions.
- Skid steer or ISO Quick Attach available.



HLSG84

SPECIFICATIONS	WOODS ALITEC™ ROOT GRAPPLE				WOODS ALITEC™ SCRAP GRAPPLE			
MODEL	HLRG65	HLRG72	HLRG79	HLRG86	HLSG66	HLSG73	HLSG78	HLSG84
Skid Steer Sizes	class 5 – 8 (1,351 – 2,700 lbs)				class 5 – 8 (1,351 – 2,700 lbs)			
Ag Tractor Sizes	45 – 100 hp (up to 10,000 lbs)				45 – 100 hp (up to 10,000 lbs)			
Width (inches)	65"	72"	79"	86"	66"	73"	78"	84"
Length (inches)	34"				35"			
Height (inches)	27"				27"			
Weight (lbs)	660	680	700	720	773	823	873	923
No. of Tines x Spacing (inches)	10 x 6.75"	11 x 6.75"	12 x 6.754"	13 x 6.75"	-	-	-	-
Heaped Capacity	-	-	-	-	15.1	16.9	18.1	19.5
Grapple Opening (inches)	37"				39"			
Grapple Width (inches)	19"				19"			
Clamping Force Per Grapple (lbs)	3,000				3,000			
Cylinder Bore (inches)	2.76"				2.76"			
Cylinder Rod (inches)	1.38"				1.38"			
Rivot Pins (inches)	1.25"				1.25"			
Greasable Pivots	yes				yes			
Cutting Edge	serrated				single, beveled bolt-on reversible edge			
Hose Protection	yes (sleeve and internal routing)				yes (sleeve and internal routing)			
Options	hydraulic pressure protection, slat kit, end plate extensions				hydraulic pressure protection, end plate extensions			

Augers

HA15E | 15-25 gpm

HA20E | 20-30 gpm

HA30E | 30-40 gpm

HA35E | 35-45 gpm

- Models for every application, hole size, ground condition, and type of skid steer.
- Designed with a planetary drive system for durability and use in hard soils.
- High-flow models are designed for heavy industrial use — boring up to 20 feet.
- Dual-angle teeth offer 40- or 50-degree attack angle and are secured with a lug and bolt attachment.
- Backhoe and excavator versions available.



Tooth Options

Standard – Standard drilling

Hardface – Abrasive soil/impact

Carbide – Rock/abrasive soil

Dual-angle Teeth

Dual-angle teeth offer 40- or 50-degree attack angle and are secured with a lug and bolt attachment

SPECIFICATIONS		AUGERS			
MODEL	HA15E	HA20E	HA30E	HA35E	
Maximum Digging Depth (feet)	10'		20'		
Auger Diameter Range (inches)	6 - 36"				
Approximate Weight with 12" Auger (lbs)	433		594	599	
Hydraulic Flow Requirement	15 - 25 gpm	20 - 30 gpm	30 - 40 gpm	35 - 45 gpm	
Auger Speed	104 rpm at 20 gpm 129 rpm at 25 gpm	66 rpm at 20 gpm 199 rpm at 30 gpm	92 rpm at 30 gpm 123 rpm at 40 gpm	87 rpm at 35 gpm 111 rpm at 45 gpm	
Application	construction grade tough soil conditions		heavy-duty construction grade rugged conditions		

COLLABORATING WITH CUSTOMERS TO DESIGN PRODUCTS IS THE BEST PART OF ENGINEERING

WOODS
CONSTRUCTION

Steve Slater, Product Design Engineer

I like collaborating with customers. Watching them in the field and finding out why they do something a certain way lets me immerse myself in their jobs and how they do it. I learn their pain points and the nuances of how they do their work. By working with customers, I'm able to generate a lot of ideas. Then I figure out how to combine the most effective ones. Which ideas are easiest? Which are best? Which are the most valuable to the customer? Collaborating with customers, makes sure I'm headed down the right path the first time.



SUPERIOR DESIGN • SUPERIOR DURABILITY • SUPERIOR STYLE



Power on Each End of Drive Shaft

Dual-drive motors power both ends eliminating rotor twist.

Tine Rotation

Bi-directional tine rotation allows for tilling when the Skid Steer moves in forward or reverse.

See more rotary tillers in our Tillage Equipment Section

Tillers

TL52A | 60-inch

TL73A | 86-inch

TL84A | 97-inch

- Unlike competitive chain drive units, direct drive hydraulic motors require no maintenance or adjustment.
- Recessed drive motors allow easy maneuvering in tight spaces.
- Broad widths increase productivity per pass making walk-behind models obsolete.
- Offset mounting on TL52A model covers right side loader tracks when operating in reverse.

SPECIFICATIONS		TILLERS		
MODEL	TL52A	TL73A	TL84A	
Overall Width (inches)	60"	86"	97"	
Cutting Width (inches)	52"	73"	84"	
Working Depth (inches)	6"			
Overall Height (inches)	31"			
Operating Weight (lbs)	510	750	825	
Number of Tines	24	36	40	
Tine Rotation	forward or reverse			
Driveline	(2) in-line hydraulic motors			
Tine Speed	74-247 rpm			
Hydraulic Flow Requirement	12-40 gpm	18-40 gpm	24-60 gpm	
Hydraulic Pressure Requirement	1,800-3,000 psi	2,000-3,000 psi	3,000-4,000 psi	



PS925

Pavement Saws

PS915 | 1.5-inch **PS925** | 2.5-inch **PS945** | 4.5-inch

- Adaptable to all skid steer loaders with high-flow hydraulic capacity, replacing more cumbersome self-propelled units.
- Nine-inch cutting depth is ideal for sawing patches and expansion joints and for making pavement cuts for utility lines and traffic loops.
- Recommended operating flow and pressure is 25—42 gpm at 2,000-3,500 psi; wheel speed at 30 gpm is 132 rpm.
- Electro-hydraulic side shift enables cutting close to walls, curbs and fixed objects.
- Built-in shroud retracts as cutting depth increases.

SPECIFICATIONS	PAVEMENT SAWS		
MODEL	PS915	PS925	PS945
Cutting Depth (inches)	9"		
Cutting Width (inches)	1.5"	2.5"	4.5"
Number of Teeth	36	28	33
Hydraulic Flow Requirement	25 - 42 gpm		
Hydraulic Pressure Requirement	2,000 - 3,500 psi		
Wheel Speed at 30 gpm	132 rpm		
Weight (lbs)	1,454	1,300	1,493



RW18

Rock Wheels

RW12 | 12-inch **RW18** | 18-inch **RW24** | 24-inch

- Alitec™ rock wheels replace higher priced concrete cutting machines.
- Quick attach mounting allows you to mount to all skid steers with high-flow hydraulics.



Planetary Drive

Planetary reduction generates higher torque than competitors' drive line packages — up to 4,800 lbs/foot.

SPECIFICATIONS	ROCK WHEELS		
MODEL	RW12	RW18	RW24
Cutting Depth (inches)	12"	18"	24"
Cutting Width (inches)	2.5"/4.5"		
Number of Teeth	32 / 38	44 / 44	54 / 57
Side Shift	22°		
Hydraulic Flow Requirement	25–47 gpm	26–47 gpm	30–47 gpm
Hydraulic Pressure Requirement	2,250–5,000 psi	2,500–5,000 psi	3,000–5,000 psi
Maximum Output Torque	2,879 lbs-ft at 3,000 psi / 3,358 at 3,000 psi 3,838 at 4,000 psi / 4,318 at 4,500 psi / 4,798 at 5,000 psi		
Wheel Speed at 30 gpm	77		
Weight (lbs)	1,572 / 1,600	1,800 / 1,850	2,000 / 2,545

Maximum Compaction

Low-flow hydraulic design allows full roller function and maximum compaction at 15 gpm.



Vibratory Rollers

VR48A | 48 inches

VR73A | 73 inches

VR66A | 66 inches

VR84A | 84 inches

- Choose from two different drum profiles for different soil applications — smooth drum for light or sandy soils and padded sheepsfoot for heavy clay-type soils.
- Easily maneuvered in tight spaces.
- Much more affordable than walk-behind or ride-on models.
- Ideal for a wide variety of jobs.

SPECIFICATIONS		VIBRATORY ROLLERS			
MODEL	VR48A	VR66A	VR73A	VR84A	
Drum Width (inches)	48"	66"	73"	84"	
Overall Width (inches)	55.5"	73"	80.5"	91"	
Drum Oscillation	+/- 15°				
Overall Height (inches)	27"				
Overall Length (inches)	33"				
Operating Weight (lbs)	1,375 1,294	1,688 1,545	1,864 1,785	2,073 1,921	
Drum Diameter (inches)	24"				
Maximum Output Force (lbs)	7,140	8,740	10,240	11,750	
Frequency	1,033–2,160 vpm				
Hydraulic Flow Requirement	11–23 gpm				
Hydraulic Pressure Requirement	1,500–3,200 psi				



Top pivot design

Top pivot design self-levels drum and chassis creating higher down forces and smoother cuts

Cold Planers

CP12LFA | 12 inches
CP16 | 16 inches

CP18 | 18 inches
CP24 | 24 inches

CP30 | 30 inches
CP40 | 40 inches

- Manual controls attach to any skid steer.
- Cut asphalt and concrete with the same machine.
- Optional water kit increases tool life by 20 to 30 percent.
- Easy to maneuver, great for bridge decks.

SPECIFICATIONS		COLD PLANERS				
MODEL	CP12LFA	CP16	CP18	CP24	CP30	CP40
Hydraulic Flow Classification	low-flow	high-flow				
Cutting Width (inches)	12"	16"	18"	24"	30"	40"
Cutting Depth (inches)	0-5"	0-6"				0-8"
Operating Weight (lbs)	1,300	1,750	1,801	1,919	2,450	3,200
Number of Teeth	36	44	48	62	74	94
Side Shift (inches)	0-22"					
Tilt	+/- 19°	+/- 15°				+/- 10°
Hydraulic Flow Requirement	13-23 gpm	22-42 gpm	25-42 gpm	28-47 gpm	30-47 gpm	33-47 gpm
Hydraulic Pressure Requirement	1,500-3,000 psi	2,000-3,500 psi		2,500-3,500 psi		3,000-5,000 psi
Depth Control Mechanism	mechanical	hydraulic				
Tilt Control Mechanism	mechanical	hydraulic				
Side Shift Mechanism	hydraulic					
Hydraulic Function Activation	manual	manual or electric				

GENERAL AND MULTI-PURPOSE BUCKETS

Alitec™ Buckets

LPSB Series – Low profile, short bottom construction bucket.

- Square back design for reverse grading.
- Shortened bottom for increased bucket breakout force.

LPLB Series – Low profile, long bottom construction bucket.

- Square back design for reverse grading.
- Longer bottom for improved operator visibility.

HDLP Series – Low profile, Heavy-duty construction bucket.

- Additional high-strength plating for superior bucket life.
- Longer bottom for improved operator visibility.

SW Series – Heavy-duty loader bucket.

- More capacity for lighter materials.
- Square back design for reverse grading.



SPECIFICATIONS		ALITEC™ GENERAL AND MULTI-PURPOSE BUCKETS		
MODEL		BUCKET WIDTH (INCHES)	SAE HEAPED CAPACITY (FT ³)	OPERATING WEIGHT (LBS)
LPSB-Series Low-profile short-bottom construction bucket	LPSB60	60"	11.9	405
	LPSB63	63"	12.5	419
	LPSB66	66"	13.2	433
	LPSB73	73"	14.6	466
	LPSB78	78"	15.7	507
LPLB-Series Low-profile long-bottom construction bucket	LPSB84	84"	16.9	536
	LPLB60	60"	14.4	434
	LPLB63	63"	15.1	449
	LPLB66	66"	15.9	463
	LPLB73	73"	17.7	499
HDLP-Series Low-profile heavy-duty construction bucket	LPLB78	78"	19.0	545
	LPLB84	84"	20.5	575
	HDLP66	66"	15.8	559
	HDLP73/HDLP73M	73"	17.6	597
SW-Series Heavy-duty loader bucket	HDLP78/HDLP78M	78"	18.9	643
	HDLP84/HDLP84M	84"	20.4	676
	SW66	66"	20.3	549
	SW73	73"	22.5	579
	SW78	78"	24.0	609
	SW84	84"	25.8	639

ALITEC™

Woods is an acknowledged leader in excavation buckets and couplers, with legacy brands Wain-Roy®, Central Fabricators (CF®) and Gannon®. Over the decades, many companies have imitated, but no one can duplicate our innovation, versatility, and superb durability.



Use our couplers and coupler systems to quickly and easily change attachments.

WainRoy®



Woods compact excavator buckets are made with high-strength steel, designed for maximum fill and easy dumping. Many models offer removable side cutters and teeth. All buckets fit a wide range of prime movers from Bobcat® to Yanmar®.

Compact excavator buckets and couplers align with the following machine classifications:

MACHINE SIZE	
1/16 yard	under 4,500 lbs.
1/8 yard	4,500 - 9,000 lbs.
1/8 yard	9,000 - 12,500 lbs.
1/4 yard	12,500 - 16,000 lbs.

Wain-Roy, CF and Gannon buckets are available in standard, heavy-duty and severe-duty models for a range of work, including

- Mini-excavating
- Ditching and grading
- Single and multiple-point ripping
- Cribbing
- Pavement removal



INNOVATION DOESN'T JUST HAPPEN. IT TAKES YOU.

Ben Faivre, Polo, Illinois
Farmer and Power Team member



The superior design, durability and style of our equipment doesn't just come from Woods team members. It's inspired and driven by passionate conversations, opinions and ideas from people like you.

You work the land. Every day you probably come up with a better way to get things done.

Why not share those ideas?

Join our Power Team customer panel and you may see your ideas come to life on our next new product. We will ask for your input on product features, new product ideas, advertising and more. We'll connect with you through surveys, phone interviews, or focus groups, depending upon your preferences. You'll get advance notice on breaking news. We may even ask you to test a product before it goes to market.

Go to woodsequipment.com/power and sign up for the Woods Power Team.

Help us develop innovative products you will love to use.

**POWER
TEAM**

Got ideas?

Join our customer panel at woodsequipment.com/power.
You have the power...



SUPERIOR DESIGN ■ SUPERIOR DURABILITY ■ SUPERIOR STYLE

woodsequipment.com

WOODS® | A Blount International Brand
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

WOODS®
A Blount International Brand

Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2020 Woods Equipment Company. All rights reserved. WOODS and Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.

B011201 Revised January 2020