



BATWING[®]



We not only build the toughest Batwing,[®]
we build the only Batwing[®]

WOODS[®]

Table of Contents

BW12	4
BW10.51 / BW15.51	5
BW10.61 / BW15.61	6-7
BW15.71	6-7
BEST BATWING EVER	8-9
BW20.51 / BW20.61	10
BW13.71 / BW20.71	11



800-319-6637 | woodsequipment.com



Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.

Woods

GENUINE PARTS

Maintain the quality and performance of your Woods equipment with Woods genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.

Find a Woods Dealer

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at woodsequipment.com or call 800-319-6637.





Rotary Cutters

**OVER 50 YEARS AGO, WOODS®
INTRODUCED THE ORIGINAL
FLEXWING ROTARY CUTTER,
THE BATWING®. IT INSTANTLY
BECAME A HOUSEHOLD NAME
FOR FLEXWING CUTTERS. WHY?
BECAUSE YOU NEEDED A RUGGED
PIECE OF EQUIPMENT THAT
COULD TACKLE THE TOUGHEST
RURAL MOWING JOBS... AND
THE BATWING DELIVERED.**

BW15.51
Shown with standard
chain shielding



BW12
Shown with standard chain shielding



SPECIFICATIONS

MODEL	BW12
Tractor PTO (hp)	35 - 75
Cutting Height (in)	2 - 12
Cut Capacity (in)	1.5
Cutting Width (in)	144
Blade Tip Speed (fpm)	14,300 center / 14,900 wing
Weight (lbs)	2450
Tongue Weight (lbs)	750
Center Deck / Wing Deck (ga)	12
Side Skirt Thickness (ga)	7
Side Skirt Depth (in)	11
Transport Width (in)	96
Stump Jumper	Oval
Flex	90° up / 22° down
Driveline Rating	CAT 4 CV main CAT 3 wing
Splitter Gearbox Rating (hp)	160
Wings Gearbox Rating (hp)	75
Output Shaft Size (in)	1.57 dia
Gearbox Warranty (yr)	6

**TRACTOR PTO HP RANGE:
MINIMUM 35 HP**

Model

BW12 | 12-foot Dual-wing Cutter for compact/utility tractors

Requiring a minimum of 35 hp, the BW12 gives you Woods quality and performance in a sleek, round-front design and our industry-leading sloped deck.

- Total weight 2,450 lbs with 750 lb tongue weight, ideal for use on lower horsepower compact and utility tractors.
- Twelve gauge, high-strength steel and smooth, sloped deck provide durability for long life.
- Fully baffled deck, ensures better distribution of cut material, and the performance you expect.
- Six-year gearbox warranty including seals, for confidence in your purchase decision.
- Standard chain shielding for added safety and peace of mind.
- Retail financing available to qualified buyers.

NOTE: All Batwing® models pass all applicable safety standards for thrown object without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that standard chain shielding be used for extra protection.



TRACTOR PTO HP RANGE: 45 - 200 HP

Model

BW10.51/BW15.51 | 15-foot flex-wing rotary cutter

The BW15.51 is ideal for cutting tall grasses and saplings up to 3 inches in diameter.



Here are just a few features exclusive to Woods that rotary cutter users like you told us were important in our 15-foot series.

- Patented driveline lift assistance system makes it easy to hook up. Standard on all models.
- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Greasable Quick-Change blade pins are easy to remove.



BW15.51
Shown with standard chain shielding

Designed with input from users like you, the BW15.51, BW15.61, BW15.71, and their one-winged models, set a new industry standard for durability, reliability, performance and ease. We think you'll agree that it's the best Batwing ever.

SPECIFICATIONS	
MODEL	BW10.51* / BW15.51
Tractor PTO (hp)	45-200
Cutting Height (in)	2 - 15
Cut Capacity (in)	3 dia
Cutting Width (in)	126 / 180
Blade Tip Speed (fpm / rpm)	15,000 at 540 16,000 at 1000
Weight (lbs)	4,040 / 4,340
Tongue Weight (lbs)	1,200
Center Deck / Wing Deck (ga)	10
Side Skirt Thickness (in)	1/4
Side Skirt Depth (in)	13
Transport Width (in)	93 / 96
Stump Jumper	Round
Flex	90° up / 22° down
Driveline Rating	CAT 6 CV main CAT 4 wing
Splitter Gearbox Rating (hp)	210
Wings Gearbox Rating (hp)	200
Output Shaft Size (in)	2 dia
Gearbox Warranty (yr)	6
Options	<ul style="list-style-type: none"> ▪ Double row chain shielding ▪ Dual wheels

*Single-wing

NOTE: 15' Batwing series no longer offered with hinged metal wing gearbox shields.



**TRACTOR PTO HP RANGE:
55 - 275 HP**

Models

BW10.61/BW15.61 | 15-foot flex-wing rotary cutter

The BW15.61 easily powers through tall brush and trees up to 4 inches in diameter.

**TRACTOR PTO HP RANGE:
65 - 300 HP**

Models

BW15.71 | 15-foot flex-wing rotary cutter

The rugged BW15.71 can tame the harshest conditions – heavy brush and trees up to 4.5 inches in diameter. Ideal for professional and contract cutting.

1 | Sloped Deck

Smooth and sloped seven-gauge steel decks shed water and debris; deck design and baffling helps recut material, ensuring a finer shred and more even distribution

2 | Gearboxes

Massive, heavy-duty gearboxes with 3-inch output shaft deliver more cutting power and performance with a six-year limited warranty



BW15.61
Shown with standard chain shielding

NOTE: 15' Batwing series no longer offered with hinged metal wing gearbox shields.

The new customer-designed 15-foot Batwing

SPECIFICATIONS		
MODEL	BW10.61* / BW15.61	BW15.71
Tractor PTO (hp)	55-275	65-300
Cutting Height (in)	2 - 15	
Cutting Capacity (in)	4 dia	4.5 dia
Cutting Width (in)	126 - 180	
Blade Tip Speed (fpm / rpm)	15,700 at 540 16,000 at 1000	
Weight (lbs)	4,400 / 4,600	5,290 / 5,500
Tongue Weight (lbs)	1,290	1,530
Center Deck (ga) / Wing Deck (in)	7	1/4
Side Skirt Thickness (in)	1/4	
Side Skirt Depth (in)	13	
Transport Width (in)	93 / 96	
Stump Jumper	Round	
Flex	90° up / 22° down	
Driveline Rating	CAT 6 CV main CAT 4 wing	CAT 6 CV main CAT 5 wing
Splitter Gearbox Rating (hp)	275	
Wings Gearbox Rating (hp)	225	
Output Shaft Size (in)	3 dia	
Gearbox Warranty (yr)	6	
Options	<ul style="list-style-type: none"> ▪ Double row chain shielding ▪ Dual wheels ▪ Shredding kit ▪ Deck ring ▪ Spring axle ▪ Full walking tandem axles 	

*Single-wing

- Rounded wings easily maneuver around obstacles and slice through tall brush while the curved leading edge shrugs off impact.
- New gearbox seal technology reduces leaks and downtime and is backed by our six-year gearbox warranty, which includes the seals.
- A steel tube around the perimeter absorbs shock and creates a stronger, longer-lasting machine.
- Chain shielding is integrated with the frame to prevent damage.
- Greaseable Quick-Change blade pins are easy to remove.

Plus,

- Beefy, heavy-duty skid shoes prevent gouging and protect the deck.
- Strategically placed, welded baffles cut and distribute debris evenly.
- Center and wing decks feature high-strength 7 gauge steel (.61) or .26 inch thick steel (.71) for added durability.
- The side skirt is 13 inches deep and made of .25 inch thick steel for greater material capacity and the strength to manage it.
- For added toughness in extreme conditions, the .61 and .71 models have a 3-inch gearbox output shaft and optional deck ring.
- Other options include double row chain shielding, dual wheels, and for the .61 and .71 models, a shredding kit for added versatility.

NOTE: 15' Batwing series no longer offered with hinged metal wing gearbox shields.

3 | Driveline

Patented driveline lift assistance system makes it easy to hook up

4 | Skid Shoes

Bolt-on, heavy-duty skid shoes with an "approachable" leading edge reduce soil damage when turning

BW15.71


Shown with standard chain shielding



***NOTE:** Woods Batwing® models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

THE BEST BATWING® YOU EVER DESIGNED.

BEST BATWING EVER

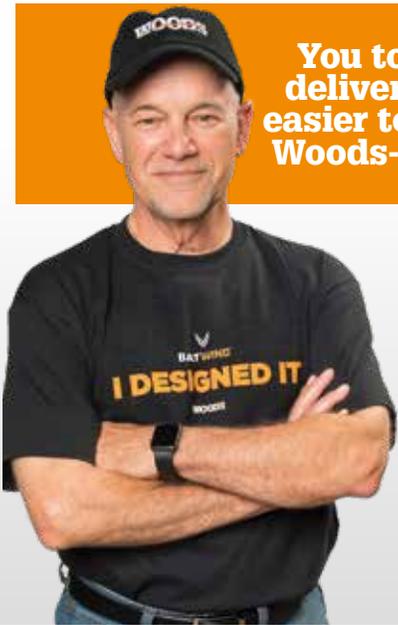

You told us what you wanted in a rotary cutter and we delivered. It's more reliable, more durable, easier to use, easier to maintain and built to perform better. A variety of Woods-exclusive features make it outstanding in its field.

“ I WANT A QUICK AND EASY TRACTOR HOOK-UP ”

Steve McCullough, Watseka, Illinois
Third Generation Family-owned Dealership and Batwing® Designer

EASY-TO-USE

- ① Patented driveline lift assistance system makes it easy to hook up - and is standard on all models.



“ I WANT A MACHINE THAT WILL LAST ”

DURABILITY

- ① Steel Tube Frame Absorbs Shock
- ② Integrated Chain Shielding Prevents Damage
- ③ Heavy-Duty Skid Shoes

RELIABILITY

New, advanced gearbox seal technology, designed for harsh conditions, reduces leaks and downtime and is backed by our six-year gearbox warranty - which includes the seals.


“ I WANT TO CUT MORE AND MAINTAIN LESS ”

Ben Faivre, Polo, Illinois
Farmer and Batwing® Designer



EASY MAINTENANCE

- ① Industry Leading Smooth, Sloped Deck
- ② Raised Components and Protected Hoses
- ③ Hinged, Easy-open Metal Shields
- ④ Easy-to-reach Grease Fittings
- ⑤ Greasable Quick-Change Blade Pins



NOTE: 15' Batwing series no longer offered with hinged metal wing gearbox shields.

“ I WANT TO GET RID OF DEBRIS COLLECTING ON THE DECK ”

Shawn Schaaf, Rock City, Illinois
Rock Run Township Highway Commissioner and Batwing® Designer



“ KEEP THE GREAT CUT QUALITY AND HELP ME MOW CLOSER TO TREES AND POLES ”

PERFORMANCE

- ① Rounded Wings
- ② Curved Leading Edge
- ③ Optional Shredding Kit Adds Two Blades
- ④ Calculated Positioning of Welded Baffles



SPECIFICATIONS		20-FOOT BATWING	
MODEL	BW20.51	BW20.61	
Tractor PTO (hp)	70-200	70-300	
Cutting Height (in)	2 - 15		
Cut Capacity (in)	2	3	
Cutting Width (in)	240		
Blade Tip Speed (fpm / rpm)	15,450 at 540 16,300 at 1000		
Weight (lbs)	6,510	6,600	
Tongue Weight (lbs)	1,950	1,980	
Center Deck / Wing Deck (ga)	10		
Side Skirt Thickness (in)	1/4		
Side Skirt Depth (in)	13.25		
Transport Width (in)	123		
Stump Jumper	Round		
Flex	90° up / 22° down		
Driveline Rating	CAT 6 CV main CAT 4 wing		
Splitter Gearbox Rating (hp)	250 / 275		
Wings Gearbox Rating (hp)	200	225	
Output Shaft Size (in)	2	2.38	
Gearbox Warranty (yr)	6		
Options	<ul style="list-style-type: none"> ▪ Double row chain shielding ▪ Dual wheels ▪ Full walking tandem axles 	<ul style="list-style-type: none"> ▪ Double row chain shielding ▪ Dual wheels ▪ Full walking tandem axles ▪ Shredding kit 	

1 | Greasable Pivot Pins

Greasable pivot points are located on turnbuckle and axle arms to increase durability and reduce wear



BW20.51
Shown with standard chain shielding

**TRACTOR PTO HP RANGE:
70 - 200 HP**

Model

BW20.51 | 20-foot Dual-wing Cutter

- Main driveline: Cat 6 CV
- Cuts brush up to 2 inches in diameter
- Walking tandem axle available

2 | Deep Side Frame

Side frame depth 13.25 inches — the deepest in the industry

**TRACTOR PTO HP RANGE:
70 - 300 HP**

Model

BW20.61 | 20-foot Dual-wing Cutter

- Maintain driveline: Cat 6 CV
- Cuts brush up to 3 inches in diameter
- Side frame depth of 13.25 inches — the deepest in the industry
- Optional shredding kit



TRACTOR PTO HP RANGE: 70 - 300 HP

Models

BW13.71 | 13.5-foot Single-wing Cutter (162-inch cutting swath)

BW20.71 | 20-foot Dual-wing Cutter (240-inch cutting swath)

- Main driveline: Cat 6 CV
- Deck plate has two layers of .135 inch plate
- Cuts brush up to 4 inches in diameter
- Side frame depth of 12.5 inches
- Optional dual tires available for wings
- Optional shredder kit or optional shredder kit
- Optional blade ring
- Six-year gearbox limited warranty



me
of
the
dustry

BW20.71

Shown with standard chain shielding



**Features a double deck,
built extra heavy to
handle a host of rugged
applications.**




3 | Quick-change Blade System

Woods' exclusive Quick-Change blade system allows for easy changing of blades from the top of the deck

SPECIFICATIONS		20-FOOT BATWING	
MODEL	BW13.71*	BW20.71	
Tractor PTO (hp)	70-300		
Cutting Height (in)	2 - 15		
Cut Capacity (in)	4		
Cutting Width (in)	162	240	
Blade Tip Speed (fpm / rpm)	15,450 at 540 16,300 at 1000	15,450 at 540 16,300 at 1000	
Weight (lbs)	8,500	7,740	
Tongue Weight (lbs)	2,250	2,320	
Center Deck / Wing Deck (ga)	10 double		
Side Skirt Thickness (in)	1/4		
Side Skirt Depth (in)	12.5	12.50	
Transport Width (in)	99	99	
Stump Jumper	Round		
Flex	90° up / 22° down		
Driveline Rating	CAT 6 CV main CAT 5 wing		
Splitter Gearbox Rating (hp)	275		
Wing Gearbox Rating (hp)	225		
Output Shaft Size (in)	2.38		
Gearbox Warranty (yr)	6		
Options	<ul style="list-style-type: none"> ▪ Double row chain shielding ▪ Dual wheels ▪ Full walking tandem axles ▪ Shredding kit ▪ Deck rings 	<ul style="list-style-type: none"> ▪ Double row chain shielding ▪ Dual wheels ▪ Full walking tandem axles ▪ Shredding kit ▪ Deck rings 	

*Single-wing

NOTE: All Batwing® models pass all applicable safety standards for thrown object without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that chain shielding be used for extra protection.

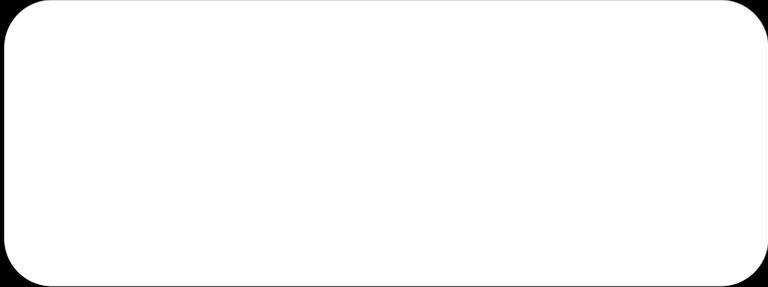

Got ideas?

Join our Power Team customer panel at woodsequipment.com/contact/power-team, or scan the QR code to the right.

You have the power...



WOODS® | Woods Equipment Company
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

WOODS
GET AFTER IT

Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2022 Woods Equipment Company. All rights reserved. WOODS and Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.